



Manuals.plus /

› MCHOSE /

› MCHOSE V9 PRO Wireless Gaming Headset and G98 PRO Mechanical Keyboard User Manual

MCHOSE V9 PRO, G98 PRO

MCHOSE V9 PRO Wireless Gaming Headset and G98 PRO Mechanical Keyboard User Manual

Model: V9 PRO Headset, G98 PRO Keyboard

1. INTRODUCTION

This manual provides detailed instructions for the MCHOSE V9 PRO Wireless Gaming Headset and the MCHOSE G98 PRO Wireless Mechanical Keyboard. Please read this guide thoroughly to ensure proper setup, operation, and maintenance of your devices. This combo product offers a complete gaming and productivity solution with advanced features for an enhanced user experience.

2. PACKAGE CONTENTS

Verify that all items are present in your package:

- MCHOSE V9 PRO Wireless Gaming Headset
- MCHOSE G98 PRO Wireless Mechanical Keyboard
- USB Wireless Receiver (for both devices)
- USB-C Charging Cable
- Detachable Microphone (for headset)
- Keycap Puller (for keyboard)
- Switch Puller (for keyboard)
- User Manual (this document)

3. MCHOSE V9 PRO WIRELESS GAMING HEADSET

3.1. Setup

The V9 PRO headset supports Tri-Mode connection: 2.4GHz wireless, Bluetooth, and wired USB.

1. 2.4GHz Wireless Connection:

- Insert the USB wireless receiver into an available USB port on your computer or console.
- Power on the headset. It will automatically attempt to connect to the receiver.
- A solid indicator light on the headset confirms a successful connection.

2. Bluetooth Connection:

- With the headset powered on, press and hold the Bluetooth pairing button until the indicator light flashes rapidly.
- On your device (phone, tablet, computer), search for Bluetooth devices and select "MCHOSE V9 PRO".
- The indicator light will become solid once paired.

3. Wired USB Connection:

- Connect the USB-C charging cable to the headset and to a USB port on your device.
- The headset will function as a wired audio device and charge simultaneously.

4. Microphone Attachment:

- Align the detachable microphone with the port on the left earcup and insert it firmly.



Image: MCHOSE V9 PRO Wireless Gaming Headset with its USB wireless receiver. The headset features large earcups and a detachable microphone.

3.2. Operating

- **Power On/Off:** Press and hold the power button for 3 seconds.
- **Volume Control:** Use the volume roller on the earcup to adjust audio output.
- **Microphone Mute:** Press the microphone mute button to toggle mute on/off.
- **7.1 Surround Sound:** Activate 7.1 surround sound via the MCHOSE HUB software for immersive audio. This feature enhances spatial awareness in games.
- **AI Noise-Canceling Microphone:** The integrated AI technology automatically filters background noise for clear communication. Ensure the microphone is positioned correctly near your mouth.
- **Audio Equalizer Customization:** Download and install the MCHOSE HUB software from the official MCHOSE

website. Use the software to customize equalizer settings to your preference, allowing for fine-tuning of audio profiles for different applications.



Image: Close-up of the MCHOSE V9 PRO headset highlighting key features such as the noise-canceling microphone, 53mm neodymium drivers, 7.1 surround sound capability, and tri-mode connectivity options.

7.1 Surround Sound for FPS Games



Image: The MCHOSE V9 PRO headset with visual cues indicating 7.1 surround sound, illustrating its immersive audio capabilities for gaming.

3.3. Maintenance

- Clean earcups and headband with a soft, dry cloth.
- Avoid exposing the headset to extreme temperatures or humidity.
- Store in a clean, dry place when not in use.

3.4. Specifications (Headset)

- **Drivers:** 53mm Neodymium
- **Sound:** 7.1 Surround Sound
- **Microphone:** AI Noise-Canceling
- **Connectivity:** 2.4GHz Wireless, Bluetooth, USB Wired
- **Battery Life:** Up to 250 hours (approximate, depending on usage)
- **Weight:** Approximately 275g



Image: Detailed view of the MCHOSE V9 PRO headset, highlighting its 9-position adjustable headband, ultra-skin-friendly materials, impressive 250-hour battery life, and lightweight design at only 275 grams.

4. MCHOSE G98 PRO WIRELESS MECHANICAL KEYBOARD

4.1. Setup

The G98 PRO keyboard supports Tri-Mode connection: 2.4GHz wireless, Bluetooth, and wired USB.

1. 2.4GHz Wireless Connection:

- Ensure the USB wireless receiver is plugged into your computer.
- Set the keyboard's connection switch to 2.4G mode.
- The keyboard will automatically connect. An indicator light will confirm the connection.

2. Bluetooth Connection:

- Set the keyboard's connection switch to BT mode.
- Press and hold FN + 1/2/3 to enter pairing mode for one of the three Bluetooth channels. The indicator light will

flash.

- On your device, search for Bluetooth devices and select "MCHOSE G98 PRO".
- The indicator light will become solid once paired. You can switch between paired devices using FN + 1/2/3.

3. Wired USB Connection:

- Connect the USB-C charging cable to the keyboard and to a USB port on your computer.
- Set the keyboard's connection switch to USB mode.
- The keyboard will function as a wired device and charge simultaneously.



Image: MCHOSE G98 PRO Wireless Mechanical Keyboard, showcasing its 96% layout with purple keycap accents.

4.2. Operating

- **Layout:** The G98 PRO features a 96% layout with 99 keys, retaining essential arrow keys and a number pad in a compact form factor.
- **RGB Backlighting:** Use FN key combinations to cycle through various RGB lighting effects, adjust brightness, and change speed. Refer to the quick guide for specific key combinations.
- **Hot-Swappable Switches:** The keyboard supports hot-swappable 3/5-pin mechanical switches, allowing users to customize their typing experience without soldering. Use the provided switch puller to carefully remove and insert switches.
- **Custom Gasket Structure:** The 5-layer gasket structure provides a flexible and cushioned typing feel, reducing vibrations and enhancing sound profile.
- **MCHOSE HUB Software:** Download and install the MCHOSE HUB software for advanced customization, including key remapping, macro creation, and lighting effects.

MCHOSE G98 PRO Mechanical Keyboards



96% Layout



Full RGB Backlit



3 Modes



8000mAh Battery



Hot Swappable



5-Layer Gasket



Ergonomic Design



MCHOSE HUB



Creamy Sound

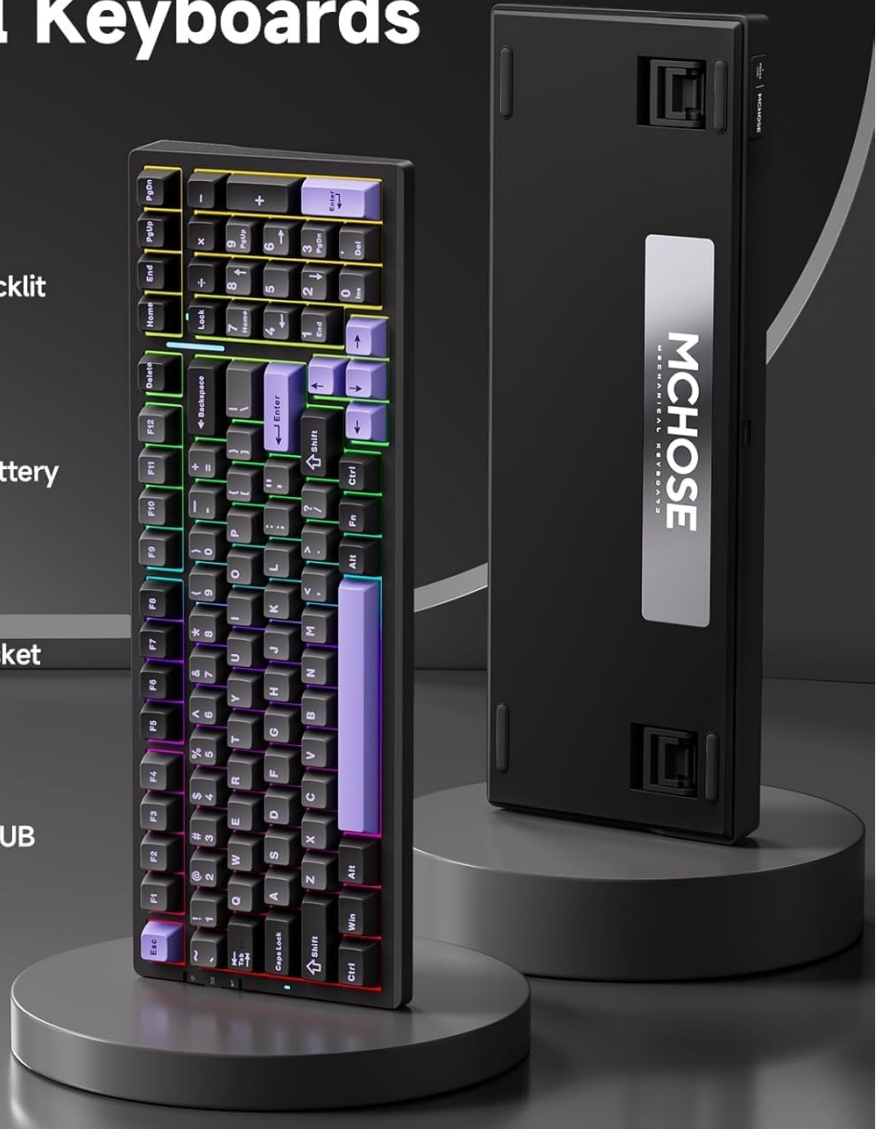


Image: Overview of the MCHOSE G98 PRO Mechanical Keyboard, detailing its 96% layout, full RGB backlit, tri-mode connectivity, 8000mAh battery, hot-swappable design, 5-layer gasket structure, and ergonomic design.

HOT SWAPPABLE PCBA

Customize your typing experience

Flame Orange Switch

Type: Linear

Operating force:
45±5gf

Pre Travel:
1.8±0.3mm

Total Travel:
3.6±0.3mm



Pre-lubed Linear Switches



Hot-Swappable



Matching 3/5pin Switches
South-facing LED



Image: Close-up demonstrating the hot-swappable PCBA of the MCHOSE G98 PRO keyboard, showing how switches like the Flame Orange Linear Switch can be easily removed and replaced.

5-Layer Gasket Structure

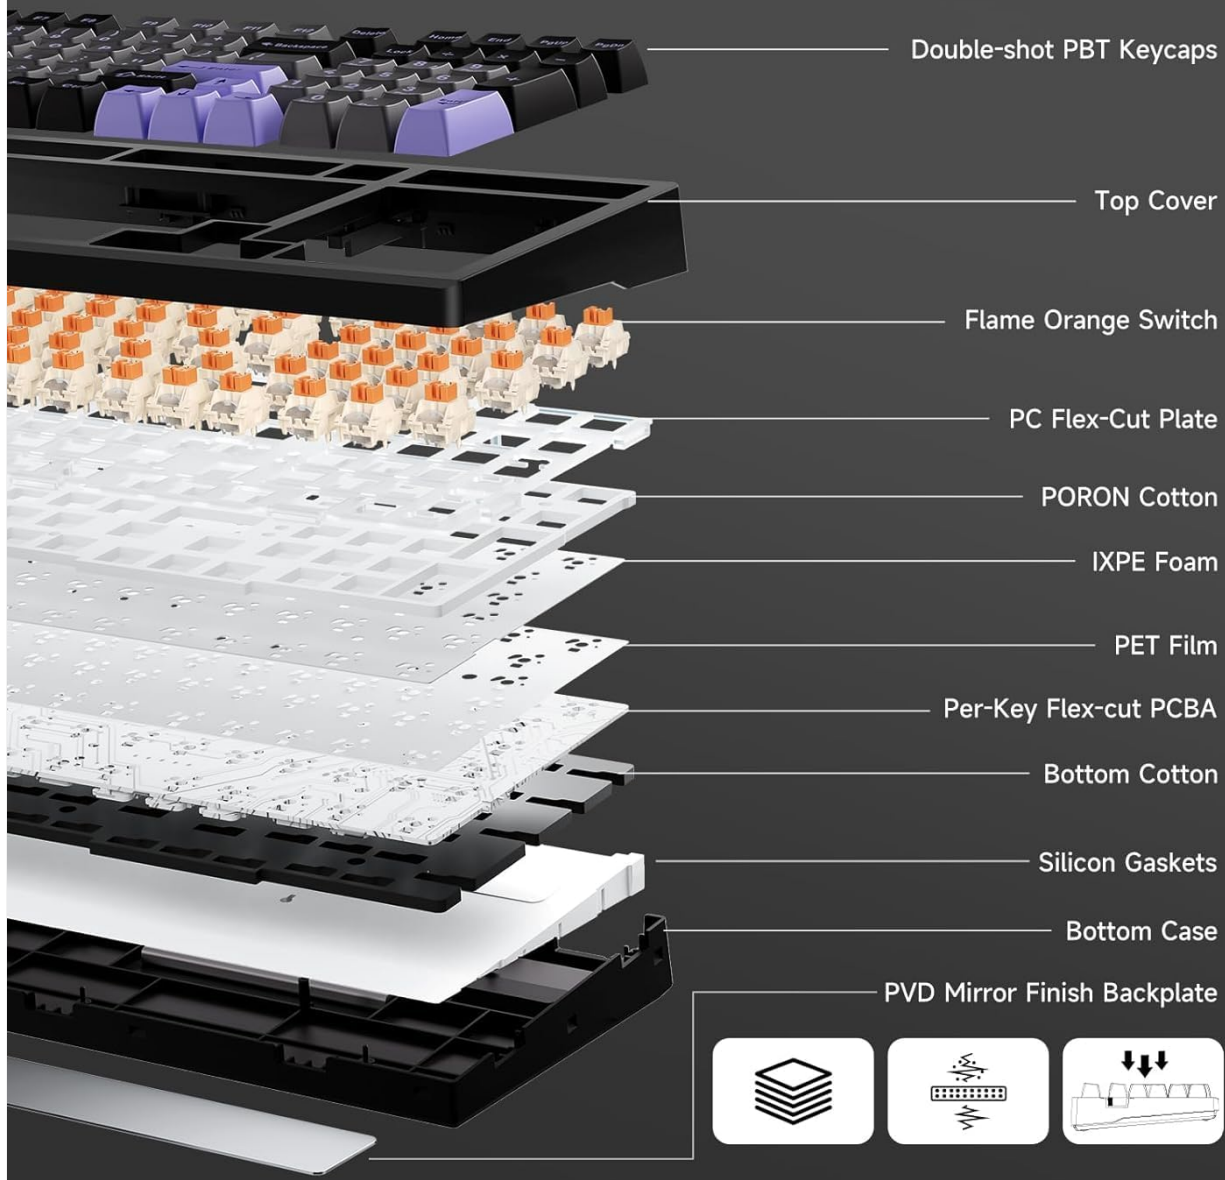


Image: Exploded view diagram of the MCHOSE G98 PRO keyboard's 5-layer gasket structure, illustrating components like double-shot PBT keycaps, switches, PC flex-cut plate, various foam layers, and silicon gaskets.

4.3. Maintenance

- **Cleaning:** Use the provided keycap puller to remove keycaps for cleaning. Use a soft brush or compressed air to remove dust and debris from between switches. Wipe keycaps with a damp cloth.
- **Switch Replacement:** Use the switch puller to carefully remove switches. Align new switches with the PCB pins and press gently until they click into place. Ensure pins are not bent.
- **Battery Charging:** Connect the USB-C cable to a power source. The indicator light will show charging status. The 8000mAh battery provides extended usage.

4.4. Specifications (Keyboard)

- **Layout:** 96% (99 keys)
- **Connectivity:** 2.4GHz Wireless, Bluetooth (BT5), USB Wired
- **Battery:** 8000mAh
- **Switches:** Hot-swappable (compatible with 3/5-pin mechanical switches)

- **Structure:** 5-Layer Gasket
- **Backlighting:** Full RGB

5. TROUBLESHOOTING

If you encounter issues, refer to the following common solutions:

Problem	Possible Cause	Solution
Headset/Keyboard not connecting wirelessly	Low battery, incorrect mode, receiver not plugged in, interference.	Charge the device. Ensure the USB receiver is securely plugged in. Switch to the correct connection mode (2.4G or BT). Move closer to the receiver.
No sound from headset	Volume too low, incorrect audio output device selected, headset not connected.	Increase volume. Check your device's sound settings to ensure the MCHOSE V9 PRO is selected as the output. Reconnect the headset.
Microphone not working	Microphone muted, incorrect input device selected, microphone not fully inserted.	Unmute the microphone. Check your device's sound settings to ensure the MCHOSE V9 PRO microphone is selected as the input. Ensure the microphone is firmly attached.
Keyboard keys not responding	Low battery, switch issue, software glitch.	Charge the keyboard. Try a wired connection. If a specific key, try replacing the switch. Restart your computer.
RGB lighting not working	Lighting turned off, software issue.	Use FN key combinations to cycle through lighting modes and brightness. Check MCHOSE HUB software settings.

6. WARRANTY AND SUPPORT

MCHOSE products come with a standard manufacturer's warranty. For detailed warranty information, please refer to the warranty card included in your package or visit the official MCHOSE website. For technical support, troubleshooting assistance, or to download the MCHOSE HUB software, please visit the MCHOSE Store on Amazon or the official MCHOSE support page.