



# Honeywell Hyperion 1300g Linear Scanner User Guide

[Home](#) » [Honeywell](#) » Honeywell Hyperion 1300g Linear Scanner User Guide

## Honeywell Hyperion 1300g Linear Scanner User Guide






### Contents [ [hide](#) ]

- [1 Getting Started](#)
- [2 Reading Techniques](#)
- [3 Keyboard Country](#)
- [4 Data Format Editor](#)
- [Instructions](#)
- [5 EZConfig](#)
- [6 Disclaimer](#)
- [7 Documents / Resources](#)
  - [7.1 References](#)
- [8 Related Posts](#)

## Getting Started

Turn off the computer's power before connecting the scanner, then power up the computer once the scanner is fully connected.

### Power Supply Assembly (if included)

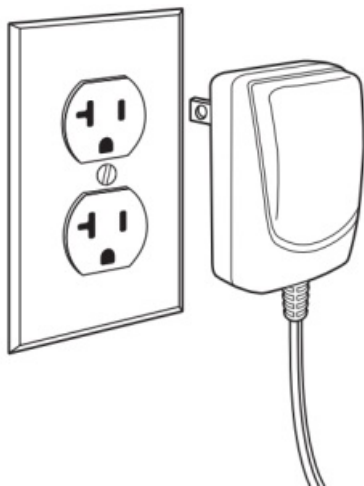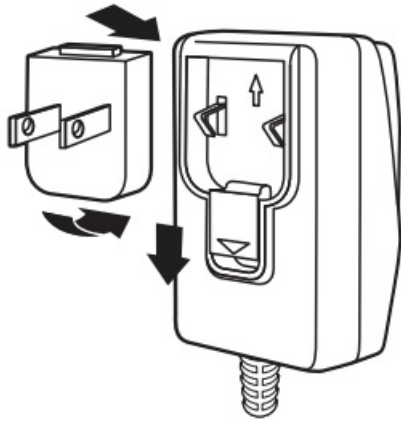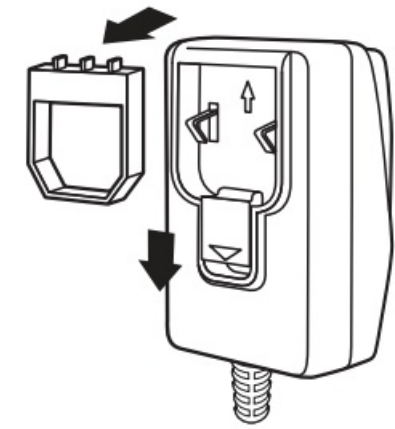


## Connecting the Scanner


### USB:




### Serial (RS232):

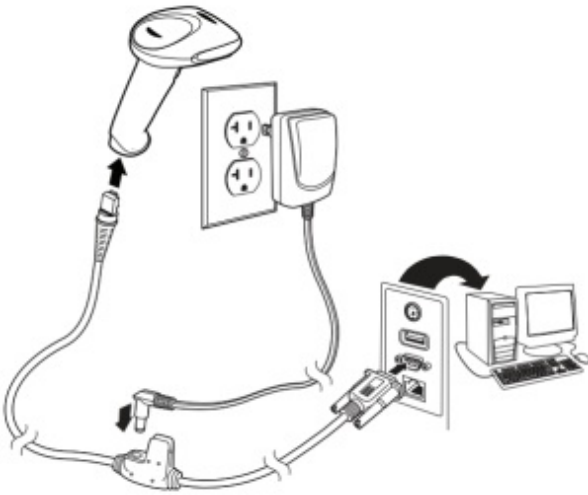

### RS485:

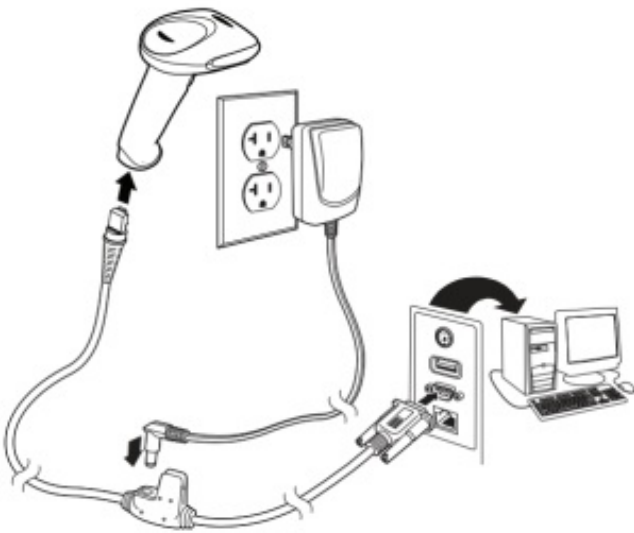

### Keyboard Wedge:

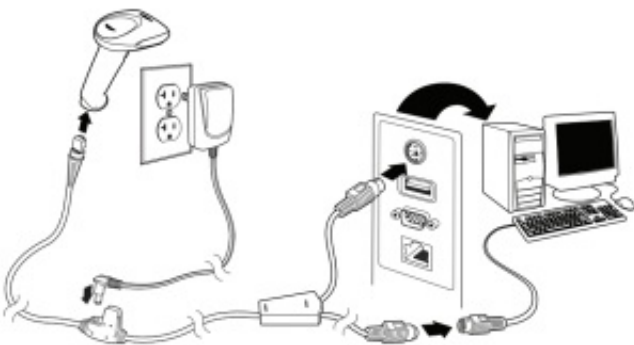

### Reading Techniques



## Standard Product Defaults

The following bar code resets all standard product default settings.

### RS485 Interface

The RS485 interface defaults to port 5B. If you have an IBM POS terminal using port 9B, scan the appropriate code below to program the terminal, then power cycle the cash register.

**Note:** For additional RS485 interface selections, see the User's Guide for your product at our website, [www.honeywellaidc.com](http://www.honeywellaidc.com).

### Keyboard Country

Scan the Program Keyboard Country bar code below, then scan the numeric bar code(s) from the end of this document, then the Save bar code to program the keyboard for your country. As a general rule, the following characters are not supported by the scanner for countries other than the United States:

@ | \$ # { } [ ] = / ' \ < > ~.

Country Code	Scan	Country Code	Scan
Belgium	1	Italy	5
Denmark	8	Norway	9
Finland	2	Spain	10
France	3	Switzerland	6
Germany/Austria	4	USA (Default)	0
Great Britain	7		

### Trigger

The following bar codes will allow you to use the reader in Manual Trigger mode (need to press the trigger to read), Automatic Trigger mode (the beam is always on), or Presentation mode (the reader is activated when it "sees" a bar code).

### Reread Delay

This sets the time period before the scanner can read the same bar code a second time. Setting a reread delay protects against accidental rereads of the same bar code.

### Suffix

If you want a carriage return after the bar code, scan the Add CR Suffix bar code. To add a tab after the bar code,

scan the Add Tab Suffix bar code. Otherwise, scan the Remove Suffix bar code to remove the suffixes.

### **Add Code ID Prefix to all Symbolologies**

Scan the following bar code if you wish to add a Code ID prefix to all symbolologies at once.

**Note:** For a complete list of Code IDs, see the User's Guide for your product at our **website**, [www.honeywellaidc.com](http://www.honeywellaidc.com).

### **Data Format Editor Instructions**

The following are abbreviated instructions for entering a data format.

For complete instructions refer to your User's Guide, available at our website, [www.honeywellaidc.com](http://www.honeywellaidc.com).

1. Scan the Enter Data Format symbol.
2. Primary/Alternate Format: scan 0 for Primary Format
3. Terminal Type: scan 099 for any terminal type
4. Code I.D.: scan 99 for any bar code type
5. Length: scan 9999 for any length bar code.
6. Editor commands: use the Programming Chart that follows.
7. Scan Save to save your entries.

### **EZConfig**

To access additional features for the scanner use EZConfig, an online configuration software tool, available from our website at [www.honeywellaidc.com](http://www.honeywellaidc.com).

### **Technical Assistance**

Contact information for technical support, product service, and repair can be found at [www.honeywellaidc.com](http://www.honeywellaidc.com).

### **Limited Warranty**

Refer to [www.honeywellaidc.com/warranty\\_information](http://www.honeywellaidc.com/warranty_information) for your product's warranty information.

### **User Documentation**

For localized versions of this document, and to download the User's Guide, go to [www.honeywellaidc.com](http://www.honeywellaidc.com).

### **Disclaimer**

Honeywell International Inc. ("HII") reserves the right to make changes in specifications and other information contained in this document without prior notice, and the reader should in all cases consult HII to determine whether any such changes have been made. The information in this publication does not represent a commitment on the part of HII.

HII shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of HII.



Documents / Resources

	<p><a href="#">Honeywell Hyperion 1300g Linear Scanner</a> [pdf] User Guide Hyperion 1300g, Linear Scanner, Honeywell</p>
--	---

References

- [H Safety and Productivity Solutions | Honeywell](#)
- [H Safety and Productivity Solutions | Honeywell](#)