

[Manuals.plus](#) /

› [Energizer](#) /

› Energizer Smart 2K Light Bulb Security Camera Instruction Manual

Energizer EOP1-1003

Energizer Smart 2K Light Bulb Security Camera

Model: EOP1-1003

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Energizer Smart 2K Light Bulb Security Camera. Please read this manual thoroughly before using the product to ensure proper function and safety. This device integrates a 2K resolution security camera with a 1000 lumens LED light, designed for both indoor and outdoor surveillance.

WHAT'S IN THE BOX

- Energizer Smart 2K Light Bulb Security Camera
- Socket Extender
- Quick Start Guide



Image: The Energizer Smart 2K Light Bulb Security Camera shown alongside its included socket extender.

1. Physical Installation

1. Ensure the power to the light socket is turned off before installation.
2. Screw the Energizer Smart 2K Light Bulb Security Camera directly into a standard E26 light socket. If the camera's size obstructs the light fixture or view, use the provided socket extender.
3. Once securely installed, turn the power back on. The camera will power on and begin its initialization sequence.



Image: A hand demonstrates screwing the camera into a light socket, highlighting the easy installation process.

Included
E26 Light Socket Extender



Image: The camera installed in an outdoor light fixture, demonstrating its IP54 weather-resistant design during rainfall.

2. App Download and Wi-Fi Connection

1. Download the Energizer Connect app from your smartphone's app store (available for iOS and Android).
2. Open the app and create an account or log in.
3. Follow the in-app instructions to add your new device. Ensure your smartphone is connected to a 2.4GHz Wi-Fi network during the initial pairing process. The camera supports both 2.4GHz and 5GHz Wi-Fi bands for stable connectivity after setup.



Image: A visual representation of the camera's dual-band Wi-Fi capability, supporting both 2.4GHz for longer transmission distance and 5GHz for faster data speed.

OPERATING INSTRUCTIONS

Live Viewing and Recording

- Access live 2K Quad HD video streaming through the Energizer Connect app.
- Record video and audio directly to a microSD card (up to 128GB, not included) or utilize the optional cloud storage service (30-day free trial available).



Image: The camera integrated into an indoor lamp, with a smartphone displaying its 2K live video feed.



Cloud Storage

Free 30 Day Trial

Record Video & Audio

With a microSD Card (not included, max 128GB)

Image: A close-up view of the camera's base, indicating the microSD card slot for local storage and the availability of cloud storage.

Pan, Tilt, and Auto-Tracking

- Control the camera's viewing angle with 355° pan and 90° tilt functionality via the app.
- Enable auto-tracking to automatically follow detected motion within the camera's field of view.



Image: The camera installed in an outdoor light fixture, illustrating its 355-degree pan and 95-degree tilt capabilities.



Image: A smartphone displays the camera's motion tracking feature, following a person walking towards a house.

Motion Alerts and Two-Way Audio

- Receive instant motion detection alerts on your smartphone.
- Utilize the built-in two-way audio feature to communicate with visitors or deter unwanted activity directly through the camera.

Lighting and Night Vision

- The integrated 1000 lumens LED light is dimmable and offers multi-white color temperature options (cool, soft, warm). Adjust settings via the app.
- Advanced night vision provides clear footage in low-light conditions.

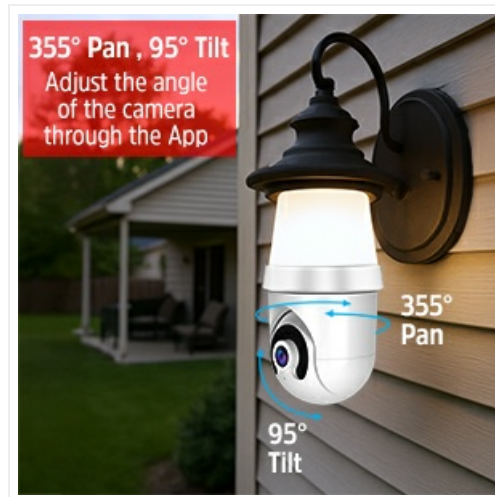


Image: Three cameras in pendant lights demonstrating the multi-white lighting options: cool, soft, and warm.

Smart Home Integration

The camera is compatible with Google Home and Amazon Alexa, allowing for voice control and integration into your existing smart home ecosystem.

Official Product Video

Your browser does not support the video tag.

Video: An official product video from Energizer Connect demonstrating the features and ease of use of the Smart Light Bulb Security Camera, including installation, dual-band Wi-Fi, auto-tracking, motion alerts, 2-way audio, and night vision.

MAINTENANCE

- **Cleaning:** Gently wipe the camera lens and light surface with a soft, dry cloth. Avoid using harsh chemicals or abrasive materials.
- **Firmware Updates:** Regularly check the Energizer Connect app for available firmware updates to ensure optimal performance and security.
- **Environmental Conditions:** While the camera is rated for outdoor use (IP54 weather resistant), extreme weather conditions may affect performance. Ensure it is installed in a suitable fixture that offers some protection.

TROUBLESHOOTING

- **Camera Not Connecting to Wi-Fi:**
 - Ensure your router is broadcasting a 2.4GHz network during initial setup. The camera supports both 2.4GHz and 5GHz, but initial pairing often requires 2.4GHz.
 - Verify your Wi-Fi password is correct.
 - Move the camera closer to your Wi-Fi router.

- Reset the camera using the reset button (refer to the app for location).

- **Video Feed Blanking Out:**

- Check your Wi-Fi signal strength in the camera's location. A weak signal can cause interruptions.
- Ensure there are no obstructions blocking the Wi-Fi signal.
- Restart the camera by turning off and on the power to the light socket.

- **Auto-Tracking Not Working:**

- Ensure the auto-tracking feature is enabled in the Energizer Connect app settings.
- Verify there are no physical obstructions preventing the camera's movement.

- **Camera Already Paired to Another Account:**

- If you purchased the camera new and encounter this issue, contact Energizer customer support immediately. This indicates a potential product defect or previous use.

- **Poor Night Vision Quality:**

- Ensure the camera lens is clean.
- Check for any reflective surfaces near the camera that might interfere with infrared illumination.

SPECIFICATIONS

Model Number	EOP1-1003
Video Capture Resolution	2K
Light Output	1000 Lumens LED (Dimmable, Multi-White)
Connectivity	Wi-Fi (2.4GHz & 5GHz)
Pan/Tilt Range	355° Pan, 90° Tilt
Storage Options	Micro-SD card (up to 128GB), Cloud Storage
Audio	Two-Way Audio
Night Vision	Yes
Smart Home Compatibility	Amazon Alexa, Google Assistant
Power Source	Corded Electric (Light Socket)
Dimensions (L x W x H)	3.5 x 4 x 9.5 inches
Item Weight	13.4 ounces (0.38 Kilograms)
Indoor/Outdoor Usage	Indoor, Outdoor



Image: A diagram illustrating the physical dimensions of the camera and its socket extender.

WARRANTY

Warranty information for the Energizer Smart 2K Light Bulb Security Camera is typically provided with your purchase. Please refer to the packaging or the official Energizer Connect website for specific warranty terms and conditions.

SUPPORT

For technical assistance, troubleshooting, or product inquiries, please contact Energizer Connect customer support. Contact details can usually be found on the product packaging or the official Energizer Connect website.