

[Manuals.plus](#) /

› [Energizer](#) /

› Energizer Smart 2K Light Bulb Security Camera User Manual

Energizer EOP1-1003

Energizer Smart 2K Light Bulb Security Camera User Manual

Model: EOP1-1003 | Brand: Energizer

1. INTRODUCTION

Thank you for choosing the Energizer Smart 2K Light Bulb Security Camera. This innovative device combines a powerful 1000 lumens LED light with a high-definition 2K security camera, offering comprehensive surveillance for your indoor and outdoor spaces. Featuring pan and tilt capabilities, auto-tracking, two-way audio, and dual-band Wi-Fi connectivity, this camera provides peace of mind and enhanced security. This manual will guide you through the setup, operation, and maintenance of your new security camera.

2. WHAT'S IN THE BOX

- Light Bulb Socket Camera
- Socket Extender




The Energizer Smart 2K Light Bulb Security Camera and its packaging, illustrating the main unit and the included socket extender.

3. SETUP GUIDE

Follow these steps to set up your Energizer Smart 2K Light Bulb Security Camera:

1. **Download the Energizer Connect App:** Search for "Energizer Connect" on the App Store (iOS) or Google Play Store (Android) and install the application on your smartphone or tablet.
2. **Install the Camera:** Screw the Light Bulb Socket Camera into a standard E26 light socket. If the socket is recessed or the camera's view is obstructed, use the included socket extender. Ensure the power to the socket is turned off before installation.

3. **Power On and Connect:** Turn on the power to the light socket. The camera will enter pairing mode. Follow the in-app instructions to connect the camera to your 2.4GHz or 5GHz Wi-Fi network.
4. **Complete Setup:** Once connected, you can name your camera, adjust settings, and begin monitoring through the Energizer Connect App.

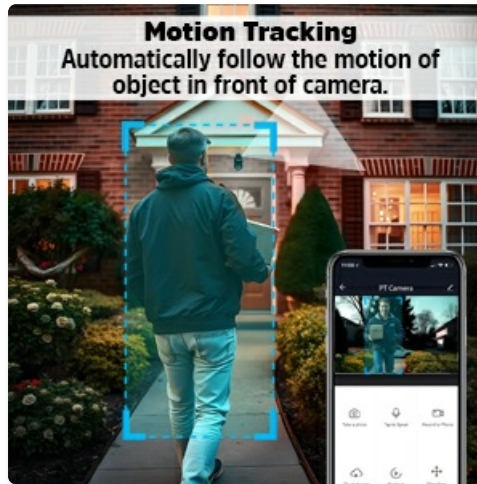

The camera is designed for easy installation into any standard light bulb socket.

Included

E26 Light Socket Extender



The included E26 light socket extender allows for flexible installation in various fixtures, including outdoor weather-resistant ones (IP54 rated).

4. OPERATING INSTRUCTIONS

4.1 Live View and Recording

Access the live 2K Quad HD video feed from your camera anytime, anywhere via the Energizer Connect App. You can manually record video or capture screenshots directly from the live view.



1000 LUMENS

MULTI-WHITE

COOL SOFT WARM

DIMMABLE

2K QUAD HD

LIVE VIDEO VIEWING

14:47
Camera
HD
3-12-2019 14:47
143 KB/S

Experience clear 2K Quad HD live video viewing directly from your smartphone.

4.2 Pan, Tilt, and Auto-Tracking

Control the camera's viewing angle remotely through the app. The camera offers a 355° horizontal pan and 90° vertical tilt range. Enable the auto-tracking feature to automatically follow detected motion within the camera's field of view, ensuring continuous coverage of moving subjects.



Cloud Storage*

Free 30 Day Trial

Record Video & Audio

With a microSD Card (not included, max 128GB)

*Battery may drain quicker when using cloud storage

Adjust the camera's perspective with 355° pan and 90° tilt functionality.

4.3 1000 Lumens LED Light and Night Vision

The integrated 1000 lumens LED light provides bright illumination for your area. It is dimmable and features multi-white settings (cool, soft, warm) to suit your preference. The camera also includes advanced night vision for clear monitoring in low-light or complete darkness.



The 1000 lumens LED light offers dimmable and multi-white options (cool, soft, warm) to adapt to your lighting needs.

4.4 Dual-Band Wi-Fi Connectivity

The camera supports both 2.4GHz and 5GHz Wi-Fi bands, providing a stable and reliable connection. The 5GHz band offers faster data speeds, while the 2.4GHz band provides a longer transmission distance, allowing you to choose the best option for your network environment.



Dual Band Supports Dual 2.4GHz & 5GHz Network Bands

The camera supports both 2.4GHz for longer range and 5GHz for faster data speeds, ensuring a robust connection.

4.5 Two-Way Audio

Utilize the built-in microphone and speaker for two-way communication. This feature allows you to speak to visitors or deter intruders directly through the camera via the app.

4.6 Storage Options

Your camera offers flexible storage solutions for recorded footage:

- **Micro-SD Card:** Insert a micro-SD card (up to 128GB, not included) into the designated slot for local storage of recordings.
- **Cloud Storage:** Opt for cloud storage for secure, remote access to your video history. A 30-day free trial is typically included.



The camera supports both local storage via a microSD card (up to 128GB) and optional cloud storage with a free trial.

4.7 Smart Home Integration

The Energizer Smart 2K Light Bulb Security Camera is compatible with Google Home and Amazon Alexa, allowing for voice control and integration into your existing smart home ecosystem.

5. MAINTENANCE

To ensure optimal performance and longevity of your camera:

- **Cleaning:** Gently wipe the camera lens and body with a soft, dry cloth. Avoid using harsh chemicals or abrasive materials.
- **Firmware Updates:** Regularly check the Energizer Connect App for available firmware updates. Keeping your camera's firmware up-to-date ensures you have the latest features and security enhancements.
- **Environmental Conditions:** While the camera is IP54 weather-resistant, avoid direct exposure to extreme weather conditions or prolonged submersion in water.

6. TROUBLESHOOTING

If you encounter issues with your Energizer Smart 2K Light Bulb Security Camera, refer to the following common solutions:

- **Camera Offline:**
 - Check your Wi-Fi connection and ensure the camera is within range of your router.
 - Verify the camera is receiving power.
 - Restart the camera by turning off and on the power to the light socket.
- **Poor Video Quality:**
 - Ensure your Wi-Fi signal is strong. Consider moving the router closer or using a Wi-Fi extender.
 - Clean the camera lens.
 - Check your internet speed.
- **Motion Detection Not Working:**
 - Verify motion detection settings are enabled in the Energizer Connect App.
 - Adjust sensitivity settings.
 - Ensure there are no obstructions blocking the camera's view.
- **Two-Way Audio Issues:**
 - Check microphone and speaker permissions for the Energizer Connect App on your smartphone.
 - Ensure volume levels are adequate.

For more detailed troubleshooting, please refer to the official[Troubleshooting Guide \(PDF\)](#).

7. SPECIFICATIONS

Feature	Specification
Model Name	Energizer Smart 2K Light Bulb Security Camera with 1000 Lumens LED Light

Item Model Number	EOP1-1003
Video Capture Resolution	2K
Light Output	1000 Lumens LED (Dimmable, Multi-White)
Connectivity Technology	Wireless (Wi-Fi)
Wi-Fi Bands Supported	2.4GHz & 5GHz
Pan Range	355°
Tilt Range	90°
Special Features	Local Recording, 2-Way Audio, Night Vision, Built-In Light, Brightness Control, Auto Tracking
Storage Options	Micro-SD Card (up to 128GB), Cloud Storage
Power Source	Corded Electric
Mounting Type	Light Socket
Compatible Devices	Smartphone, Tablet (Google Assistant, Amazon Alexa, Android)
Indoor/Outdoor Usage	Outdoor, Indoor
Product Dimensions	3.5 x 4 x 9.5 inches
Item Weight	14.4 ounces
UPC	805106873103

8. WARRANTY AND SUPPORT

For warranty information and customer support, please contact Energizer Connect directly. You can also find additional resources and frequently asked questions on the official Energizer Connect website or through the Energizer Connect App.

For a complete user guide, please download the official [User Manual \(PDF\)](#).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Answered questions about this manual

How can I flip the image on my Energizer EOP1-1003 Smart 2K Light Bulb Security Camera so it appears right side up when installed in a standard lamp base?

Yes, you can flip the camera image so it appears correctly when the device is installed in a standard lamp base. This setting is located within the Energizer Connect application. To flip the screen orientation,...

[Read full answer](#)