



Huddly GO Spec Sheet User Manual

[Home](#) » [Huddly](#) » Huddly GO Spec Sheet User Manual 

Huddly GO Spec Sheet User Manual



Contents

1

Dimension

2

Specification

3

Features

4

Documents / Resources


4.1

References

5

Related Posts

Dimension

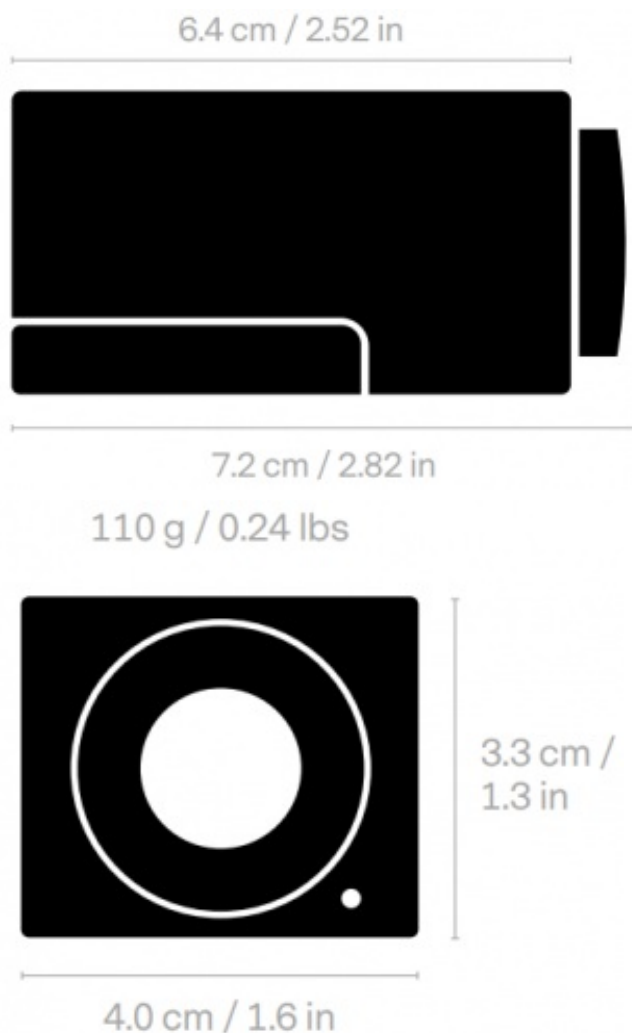

Specification

Features

High-quality scaling and dewarping 3D noise reduction Automatic white balance and color correction Optical aberration correction 4x digital zoom Low latency video processing.

Image

16 Megapixels 1/2.3" CMOS Sensor 720p HD @ 30 fps 16:9 aspect ratio output UVC 1.1 Plug & Play Compatible MJPEG, YUV 4:2:2 and 4:2:0 support over USB 3 MJPEG support over USB 2.

Connection Types

USB Type-C connector SuperSpeed USB 3 HighSpeed USB 2* Power requirement 5V 900mA

Optics

Ultra-wide angle glass optics Horizontal field of view 120° Vertical field of view 90° Diagonal field of view 150° f/2.8 aperture

Hardware Specifications

High-performance video processing engine Embedded mounting hinge Camera tripod mount

Color

Matte gray

***Requires 5V 900 mA power supply**

Features

Ultra Wide-Angle

Huddly GO's 150° wide-angle lens lets you capture everyone in the room, transforming even the smallest rooms into high quality conference suites

Dynamic Light Optimization

Auto-adjusts to your lighting conditions so you'll always look your best, no matter where you are.

High Precision Aspherical Optics

Six-element glass lens

Visual Noise Filtering

Bias compensating spatio-temporal filtering with wide area chroma filtering

Real-Time Dewarping

The wide-angle image is dewarped and perspective corrected in real time, rendering a natural, true-life view.

Self-Upgrading Huddly Vision Software

Regular updates to our Huddly Vision software mean that with a single click, your camera will continue to improve with new, cutting-edge features.

SuperSpeed USB 3.0

HD 720p 30fps output.

180° Auto-Flip

When mounted upside down, the camera automatically provides the correct view.

Embedded Mounting Hinge

Easily attaches to any TV screen, laptop or monitor.

Image Sensor

The 16 MegaPixel 1/2.3" CMOS sensor delivers immersive, crystal-clear HD video.

Camera Tripod Mount

For flexible mounting on tripods and Huddly mounting brackets.

Digital Pan/Tilt/Zoom

Huddly GO has no moving parts, making it compact and silent, as well as more reliable and accurate. Instantly pan, tilt and zoom digitally up to 4 times

huddly.com

Documents / Resources

[illegible]

References

- [!\[\]\(13b6bdd0ca077c333d50231f1443cb1d_img.jpg\) Huddly - AI-powered video conference cameras](#)