

Hui Zhou Gaoshengda Technology DCT2JM2001 WIFI+BT Module User Manual

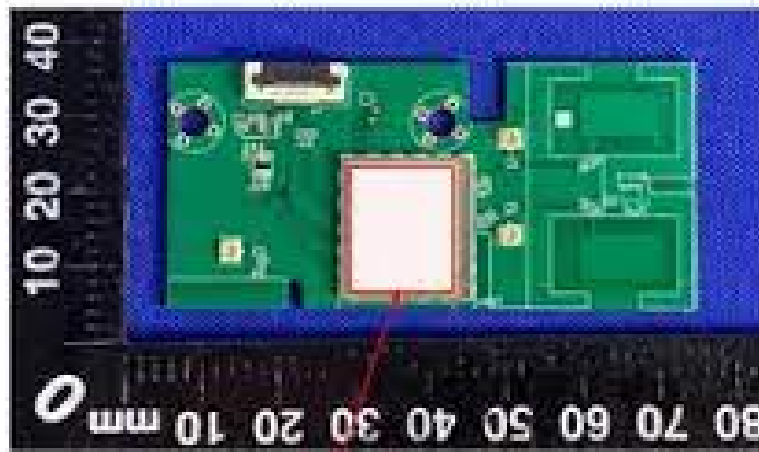
[Home](#) » [Hui Zhou Gaoshengda Technology](#) » Hui Zhou Gaoshengda Technology DCT2JM2001 WIFI+BT Module User Manual 

Contents

- [1 Hui Zhou Gaoshengda Technology DCT2JM2001 WIFI+BT Module](#)
- [2 Product Features](#)
- [3 Product Specification](#)
- [4 FCC Statement](#)
 - [4.1 Canada Statement](#)
 - [4.2 CE Statement](#)
- [5 Operation Frequency](#)
- [6 Max Output Power](#)
- [7 DECLARATION OF CONFORMITY](#)
- [8 Documents / Resources](#)
- [9 Related Posts](#)

Hui Zhou

Hui Zhou Gaoshengda Technology DCT2JM2001 WIFI+BT Module

**Model Number: DCT2JM2001****Product Description**

The DCT2JM2001 is a complete dual-band(2.4GHz and 5GHz)WIFI 2×2 MIMO module. This module provides a high level of integration with a dual-stream IEEE 802.11ac MAC/ baseband /radio and Bluetooth 5.0.The WLAN operation supports 20MHz,40MHz and 80MHz channels for data rates up to 866.7Mbps. It fully complies with IEEE 802.11 a/b/g/n/ac feature-rich wireless connectivity at high standards, delivers reliable, cost-effective, throughput from an extended distance.

Product Features

- Complies with IEEE 802.11b/g/n for 2.4GHz and IEEE 802.11a/n/ac 5GHz Wireless LAN.
- Bluetooth v5.1
- Two transmit and Two receive paths (2T2R)
- Works with all existing network infrastructure.
- Capable of up to 128-Bit WEP Encryption.
- Freedom to roam while staying connected.
- UP to 866.7 Mbps High-Speed Transfer Rate in 802.11ac mode of operation.
- Operating Systems Linux, Win7, Win8, Win10,XP
- Low power consumption.
- Easy to install and configure.
- High-speed USB 2.0 interface

Product Specification

Model	WIF+BT Module
Product Name	DCT2JM2001
Standard	802.11 a /b/g/n/ac
Interface	USB
Data Transfer Rate	1,2,5.5,6,11,12,18,22,24,30,36,48,54,60,90,120 and maximum of 866.7Mbps
Modulation Method	GFSK,π/4-DQPSK,8DPSK(blueetooth) DQPSK,DBPSK,CCK(802.11b) QPSK,BPSK,16QAM,64QAM with OFDM (802.11g) QPSK,BPSK,16QAM,64QAM with OFDM (802.11n) QPSK,BPSK,16QAM,64QAM with OFDM (802.11a) QPSK,BPSK,16QAM,64QAM,256QAM with OFDM (802.11ac)
Frequency Band	BLUETOOTH 2402~2480 MHz WIFI 2.4G: 2412MHz~2462MHz 5G: 5150MHz-5350MHz, 5470MHz-5725MHz, 5725MHz~5875MHz
Operation Mode	Infrastructure
Security	WEP, TKIP, AES, WPA, WPA2
Operating Voltage	3.3V±10%
Current Consumption	1000mA
Antenna Type	PIFA
Operating Temperature	0 ~ 70°C ambient temperature
Storage Temperature	-40 ~ 80°C ambient temperature
Humidity	5 to 95 % maximum (non-condensing)

NOTICE:

- please keep this product and accessories attached to the places which children can't touch;
- do not splash water or other liquid onto this product, otherwise, it may cause damage;
- do not put this product near the heat source or direct sunlight, otherwise, it may cause deformation or malfunction;
- please keep this product away from flammable or naked flame;
- please do not repair this product by yourself. Only qualified personnel can be repaired.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user’s authority to operate the equipment.

Please notice that if the FCC identification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must also display a label referring to the enclosed module. This exterior label can use wording such as the following: “Contains FCC ID:2AC23-DCT2J” any similar wording that expresses the same meaning may be used.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The module is limited to OEM installation ONLY.

The OEM integrator is responsible for ensuring that the end-user has no manual instruction to remove or install-module.

The module is limited to installation in the mobile application.

Separate approval is required for all other operating configurations, including portable configurations with respect to Part 2.1093 and different antenna configurations. There is a requirement that the grantee provides guidance to the host manufacturer for compliance with Part 15B requirements.

The module complies with FCC Part 15.247 / Part 15.407 and applies for Single module approval. Trace antenna designs: Not applicable.

Antennas:

2.4G	5G
PIFA antenna & 2 dBi	PIFA antenna & 3 dBi

Canada Statement

Antennas

2.4G	5G
PIFA antenna & 2 dBi	PIFA antenna & 3 dBi

This radio transmitter [IC: 12290A-DCT2J] has been approved by Innovation, Science, and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any

type listed are strictly prohibited for use with this device.

This device complies with Industry Canada's license-exempt RSS. Operation is subject to the following two conditions:

1. This device may not cause interference; and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

CE Statement

Herby, Hui Zhou Gaoshengda Technology Co., LTD declares that this WIFI+BT Module DCT2JM2001 is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU. In accordance with Article 10(2) and Article 10(10), this product is allowed to be used in all EU member states. Use the WIFI+BT Module in the environment with a temperature between 0°C and 70°C,

Operation Frequency

- For BT/BLE:
- 2402MHz~2480MHz
- For 2.4G WIFI:
- 2412MHz~2472MHz (802.11b/802.11g/802.11n(HT20))
- 2422MHz~2462MHz (802.11n(HT40))
- For 5G WIFI:
- 5150MHz-5350MHz, 5470MHz-5725MHz,
- 5725MHz~5875MHz

Max Output Power

- For BT: 0.0047W
- For BLE: 0.0042W
- For 2.4G WIFI: 0.0578W
- For 5G WIFI: 0.0521W
- Manufacturer Hui Zhou Gaoshengda Technology Co., LTD
- Address No.2, Jin-da Road, Huinan High-tech Industrial Park, Hui-ao Avenue, Huizhou City, Guangdong, China
- E-mail: guanh@gaosd.cn

DECLARATION OF CONFORMITY

Product:

Product Name: WIFI+BT Module Model: DCT2JM2001

Brand Name: N/A

Hardware Version: V1.0 Software Version: V1.0

satisfies all the technical regulations applicable to the product within the scope of Council Directives 2014/53/EU, 2014/35/EU and 2014/30/EU:and declare that the same application has not been lodged with any other notified body.

- EN IEC 62368-1:2020+A11:2020
- EN IEC 62311:2020
- ETSI EN 301 489-17 V3.2.4 (2020-09)
- Final draft ETSI EN 301 489-3 V2.2.0 (2021-11)
- ETSI EN 301 489-1 V2.2.3 (2019-11)
- ETSI EN 300 328 V2.2.2 (2019-07)
- ETSI EN 301 893 V2.1.1 (2017-05)
- ETSI EN 300 440 V2.2.1 (2018-07)

All essential radio test suites have been carried out.

NOTIFIED BODY: MiCOM Labs Inc

Address:

575 Boulder Court,
Pleasanton, California 94566
USA
Identification Number: 2280

MANUFACTURER or AUTHORISED REPRESENTATIVE:

Address:

Hui Zhou Gaoshengda Technology Co., LTD
NO 2.Huaxing RD, Zhongkai High Technology Development Area, Huizhou, Guangdong, China
This declaration is issued under the sole responsibility of the manufacturer and, if applicable, his authorized representative.

Point of contact:

Hui Guan, +86-0752-2096698/+86-0752-2096698
(Name, telephone, and fax number)

Documents / Resources



[Hui Zhou Gaoshengda Technology DCT2JM2001 WIFI+BT Module](#) [pdf] User Manual
DCT2J, 2AC23-DCT2J, 2AC23DCT2J, DCT2JM2001 WIFI BT Module, DCT2JM2001, WIFI BT Module