



Hunter HPC400 Hydrowise Ready Irrigation Controllers Owner's Manual

[Home](#) » [Hunter](#) » Hunter HPC400 Hydrowise Ready Irrigation Controllers Owner's Manual 

Contents

- [1 Hunter HPC400 Hydrowise Ready Irrigation Controllers](#)
- [2 Using the Bluetooth Remote](#)
- [3 Using Bluetooth Rapid Programming](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)




Hunter HPC400 Hydrowise Ready Irrigation Controllers




Using the Bluetooth Remote

To reduce maintenance time, eliminate having to return to the controller to manually start/stop zones when Wi-Fi is not present, and bypass the need for a SmartPort® and ROAM remote, add a WAND module to any X2™ controller. Then simply connect via Bluetooth® using the HydraWise app! HydraWise has a new Bluetooth Control screen that allows remote operation for manual single and all-zone run commands. This feature works up to 75' (23 m) away from the controller location, providing easier zone diagnostics, winterization, and site maintenance.


Step 1 Sign in to your HydraWise account [1]. From the HOME screen, select the () icon in the upper left, then BLUETOOTH CONTROL.

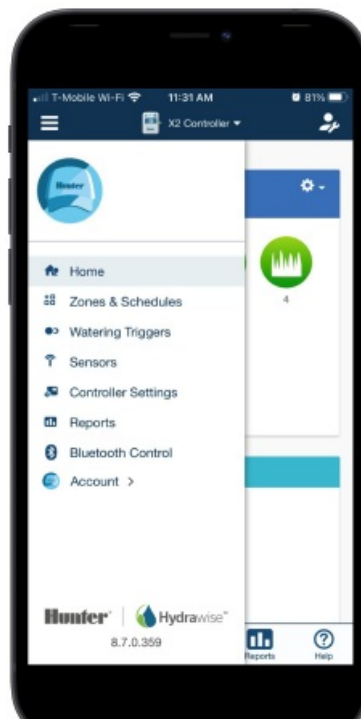


Step 2 Select the module listed from the WAND list. Select RESCAN if necessary.

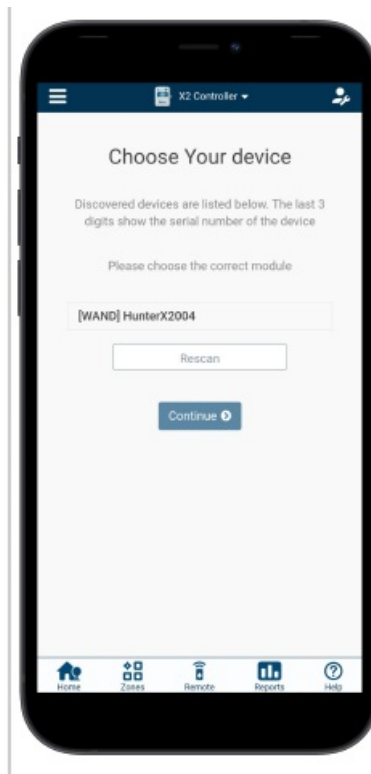

Step 3 If your model phone asks for a PAIRING REQUEST, accept by selecting OK.

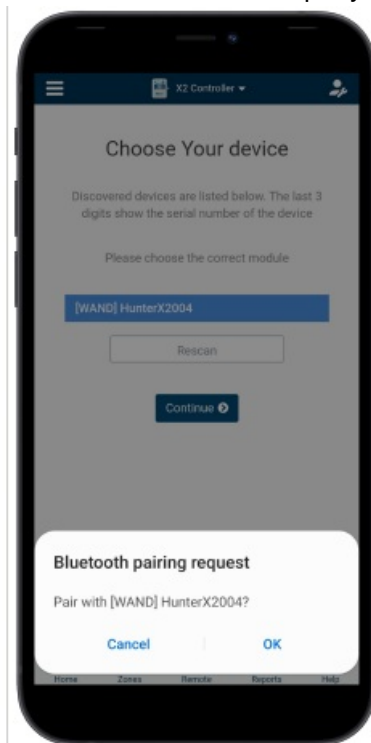


STEP 4 A 6-digit number will appear on the X2 controller. ENTER the full PIN here and select

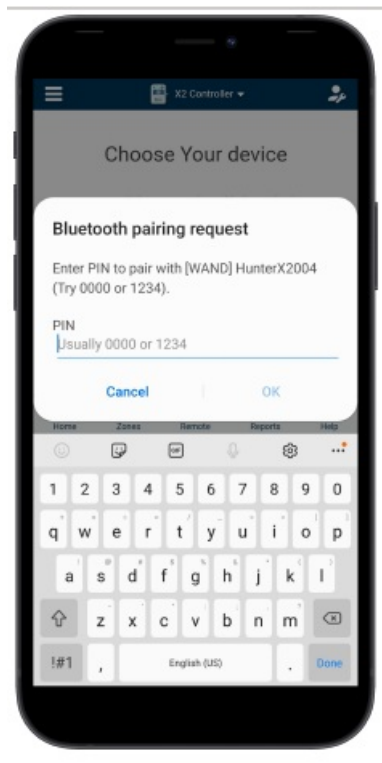

Step 5


The REMOTE CONTROL feature will appear. The CONTROLLER STATUS will display any current zones running. Using the two drop-downs, you can select a SINGLE-ZONE or RUN ALL ZONES in sequential order. Enter a RUN TIME in minutes. Select START and the system will begin watering via Bluetooth connection.

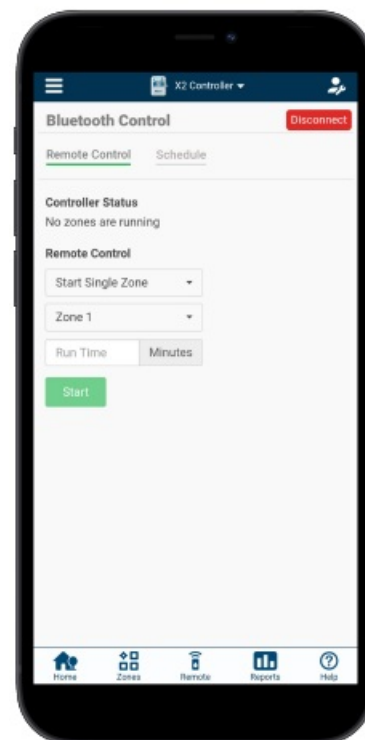


Using Bluetooth Rapid Programming

There's a better way to program standalone X2™ controllers that are not ready for Wi-Fi management. With the Hydrawise app and a WAND module, you can utilize Rapid Programming™ technology, a helpful feature that allows a preconfigured X2 schedule from the Hydrawise platform to be transferred within seconds to the X2 controller memory. The preconfigured schedule comes from the Hydrawise cloud and passes through the WAND to the controller; the WAND is removed after the transfer. This time-saving tool allows contractors to avoid the dial and buttons to ensure schedule accuracy for every controller adjustment — without setting the date and time.

Step 1 Sign in to your Hydrawise account [1]. From the HOME screen, select the () icon in the upper left, then select BLUETOOTH CONTROL.

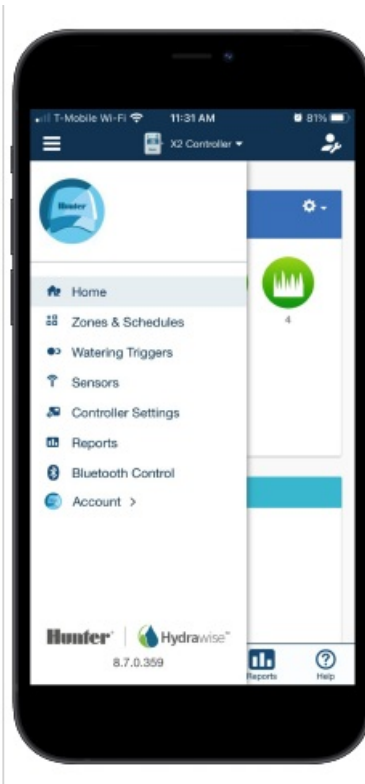


Step 2 Select the module listed from the WAND list. Select RESCAN if necessary.

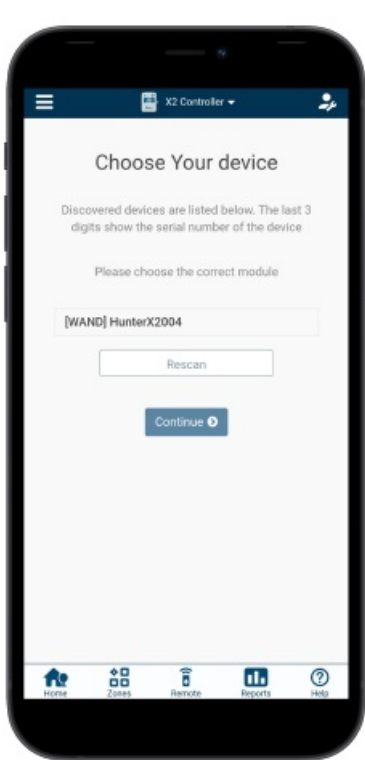

Step 3 If your model phone asks for a PAIRING REQUEST, accept by selecting OK.



STEP 4 A 6-digit number will appear on the X2 controller. ENTER the full PIN here and select OK.

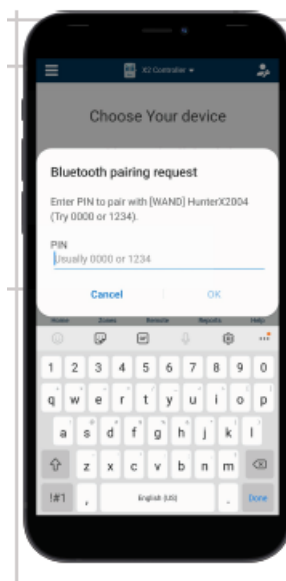

Documents / Resources



[Hunter HPC400 Hydrowise Ready Irrigation Controllers](#) [pdf] Owner's Manual
HPC400, Hydrowise Ready Irrigation Controllers, HPC400 Hydrowise Ready Irrigation Controllers, Irrigation Controllers, Controllers