



HYCO L102 Wireless Indicator Owner's Manual

[Home](#) » [hyco](#) » HYCO L102 Wireless Indicator Owner's Manual 

HYCO L102 Wireless Indicator



Contents

[1 Features](#)

[2 Benefits](#)

[3 Specifications](#)

[4 Applications](#)

[5 Documents /
Resources](#)

[5.1 References](#)

[6 Related Posts](#)

Features


Easy Usage



Light & Thin



Clip or Stick



Benefits

No Installation



No Fixing



Rechargeable



Low Cost



Specifications



Lanyard Hole


Built-in Lithium Battery

Sounding Hole

LED Indicator

Barcode Tag
(Customizable)

DC Charging Port

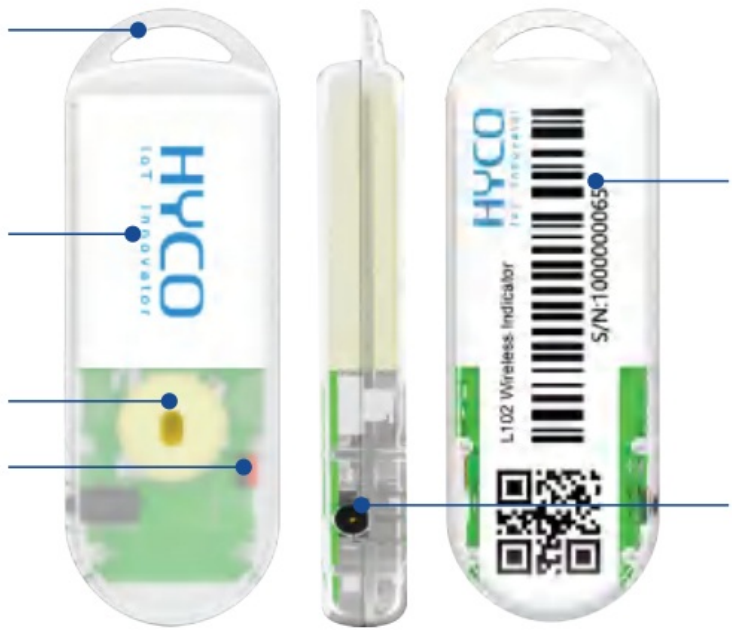

Model	L102
Weight	20g
Dimensions (W*D*H)	75mm*30mm*10.5mm
LED Indicator	RGB LED (programmable)
Buzzer	Supported
Communication	BT Token
Installation	Clip/Stick
Battery (Replaceable)	600mAh@3.0V
Charging Time	2.5 hours
Battery Life	30 months
Recharging	With C102 centralized charger (supports charging 10 devices at the same time)
Operating Temperature	-10 °C to 50 °C (14 °F to 122 °F)
Humidity	0%-80%RH (non condensing)

Applications



Express Transit Sorting



Delivery Service Station



Fixture Asset Management



Documents / Resources

	<p>HYCO L102 Wireless Indicator [pdf] Owner's Manual L102, L102 Wireless Indicator, Wireless Indicator, Indicator</p>
--	---

References

- [H Ultra-low power consumption Ring scanners, wireless indictors,smart watch, wearable IoT](#)