HYGIPLAS CF912 Easytemp Thermometer Instruction Manual

Contents

HYGIPLAS CF912 Easytemp Thermometer

Safety Instructions

- Clean the probe immediately after each measurement to avoid cross contamination.
- Do not expose the appliance to temperatures over 50ºC/122ºF or use in ovens.

Installation

1. Open the battery compartment on the bottom of the appliance.
2. Insert the battery (Negative (-) terminal first).
3. Close the battery cover.

Operation

Temperature Measurement

1. Press the On/Off button to power up the thermometer.
2. Open up the probe to the desired angle.
3. Insert the probe approximately 25mm (1") into the foodstuff.
4. The temperature of the foodstuff is displayed when the value remains constant.

Units of Measurement
Press the ºC/ºF button to alternate between Centigrade and Fahrenheit.

Data Hold

1. Press the HOLD button to keep the current reading displayed.
2. Press the HOLD button again to resume normal operation.

Maximum/Minimum Readings
The thermometer can store and display the maximum and minimum temperature readings taken since the last reset:

1. Press the MAX/MIN button. The MAX icon flashes and the maximum temperature taken displays on the screen.
2. Press the MAX/MIN button again. The MIN icon flashes and the minimum temperature taken displays on the screen.
3. Press the button again to resume normal operation.

Note: To reset the memory press and hold the MAX/MIN button for 3 seconds.
Always reset the memory before taking new readings to ensure accurate readings.

Technical Specification

Temperature range	-50-300ºC/-58-572ºF
Temperature reading accuracy	± 2ºC/3.6ºF between -50~-20ºC/-58~-4ºF ± 1ºC/1.8ºF between -20~120ºC/-4~248ºF ± 2ºC/3.6ºF between 120~200ºC/248~392ºF ± 3ºC/5.4ºF between 200~300ºC/392~572ºF
Resolution	0.1ºC over full range
Temperature display refresh rate	1 second
Display size	16(h) x 28(w) mm
Battery	AAA
Probe size	3.8(Ø) x 116(l) mm
Thermometer dimensions (hxwxd)	161.2 x 55 x 21 mm
Ambient operating temperature	0-50ºC / 32-122ºF

Troubleshooting

If the appliance ceases to function correctly, press and hold the red RESET button (situated on the back of the appliance) using a pointed instrument.

Compliance
Dispose of depleted batteries in accordance with local regulations, within the EC there are nominated disposal points for batteries.

The WEEE logo on this product or its documentation indicates that the product must not be disposed of as household waste. To help prevent possible harm to human health and/or the environment, the product must be disposed of in an approved and environmentally safe recycling process. For further information on how to dispose of this product correctly, contact the product supplier, or the local authority responsible for waste disposal in your area.
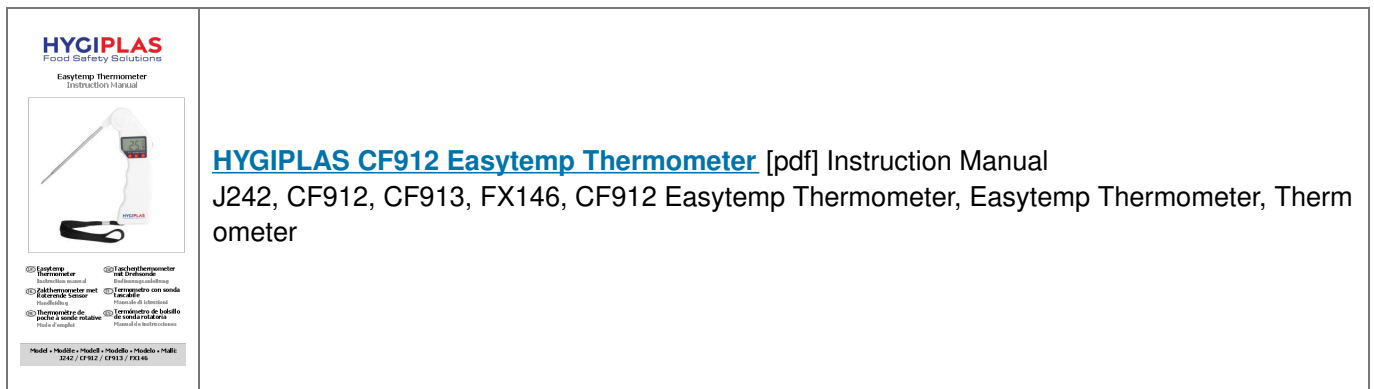
HYGIPLAS parts have undergone strict product testing in order to comply with regulatory standards and specifications set by international, independent, and federal authorities. HYGIPLAS products have been approved to carry the following symbol:

UK CA CE

UK	+44 (0)845 146 2887	Fourth Way, Avonmouth, Bristol, BS11 8TB United Kingdom
Eire		42 North Point Business Park, New Mallow Road, Cork, Ireland
NL	040 – 2628080	
FR	01 60 34 28 80	
BE-NL	0800-29129	
BE-FR	0800-29229	
DE	0800 – 1860806	
IT	N/A	
ES	901-100 133	
AU	1300 225 960	15 Badgally Road, Campbelltown, 2560, NSW, Australia

Documents / Resources

HYGIPLAS CF912 Easytemp Thermometer [pdf] Instruction Manual
J242, CF912, CF913, FX146, CF912 Easytemp Thermometer, Easytemp Thermometer, Thermometer