



HyperX HX430C15FB3/8 8GB 1G x 64-Bit DDR4-3000 CL15 288-Pin DIMM Memory Module User Guide

[Home](#) » [HYPERX](#) » HyperX HX430C15FB3/8 8GB 1G x 64-Bit DDR4-3000 CL15 288-Pin DIMM Memory Module User Guide 



HX430C15FB3/8 8GB 1G x 64-Bit
DDR4-3000 CL15 288-Pin DIMM Memory Module
User Guide



Memory Module Specifications
HX430C15FB3/8
8GB 1G x 64-Bit DDR4-3000 CL15 288-Pin DIMM

Contents

1 DESCRIPTION

2 FACTORY TIMING PARAMETERS

3 SPECIFICATIONS

4 FEATURES

5 MODULE WITH HEAT SPREADER

6 MODULE DIMENSIONS

7 Documents / Resources

7.1 References

8 Related Posts

DESCRIPTION

HyperX HX430C15FB3/8 is a 1G x 64-bit (8GB) DDR4-3000 CL15 SDRAM (Synchronous DRAM) 1Rx8, memory module, based on eight 1G x 8-bit FBGA components per module. Each module kit supports Intel® Extreme Memory Profiles (Intel® XMP) 2.0. Each module has been tested to run at DDR4-3000 at a low latency timing of 15-17-17 at 1.35V. The SPDs are programmed to JEDEC standard latency DDR4-2400 timing of 17-17-17 at 1.2V. Each 288-pin DIMM uses gold contact fingers. The JEDEC standard electrical and mechanical specifications are as follows:

FACTORY TIMING PARAMETERS

- Default (JEDEC):.....DDR4-2400 CL17-17-17 @1.2V
- XMP Profile #1:.....DDR4-3000 CL15-17-17 @1.35V
- XMP Profile #2:..... DDR4-2666 CL15-17-17 @1.35V

SPECIFICATIONS


CL(IDD)	17 cycles
Row Cycle Time (tRCmin)	45.75ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	350ns(min.)
Row Active Time (tRASmin)	32ns(min.)
UL Rating	94 V – 0
Operating Temperature	0°C C to +85°
Storage Temperature	-55°C to +100°C

FEATURES


- Power Supply: VDD = 1.2V Typical
- VDDQ = 1.2V Typical
- VPP = 2.5V Typical
- VDDSPD = 2.2V to 3.6V
- On-Die termination (ODT)

- 16 internal banks; 4 groups of 4 banks each
- Bi-Directional Differential Data Strobe
- 8 bit pre-fetch
- Burst Length (BL) switch on-the-fly BL8 or BC4(Burst Chop)
- Height 1.3425" (34.1mm), w/ heatsink


MODULE WITH HEAT SPREADER

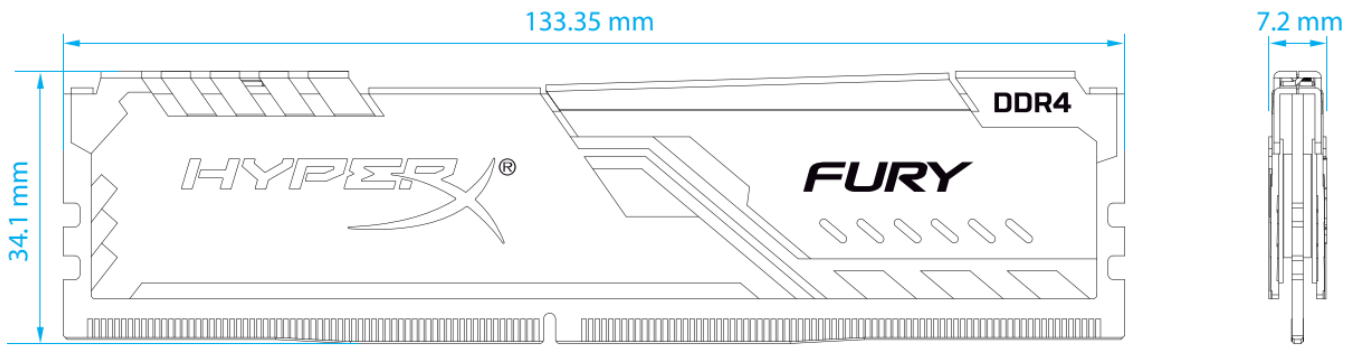

MODULE DIMENSIONS

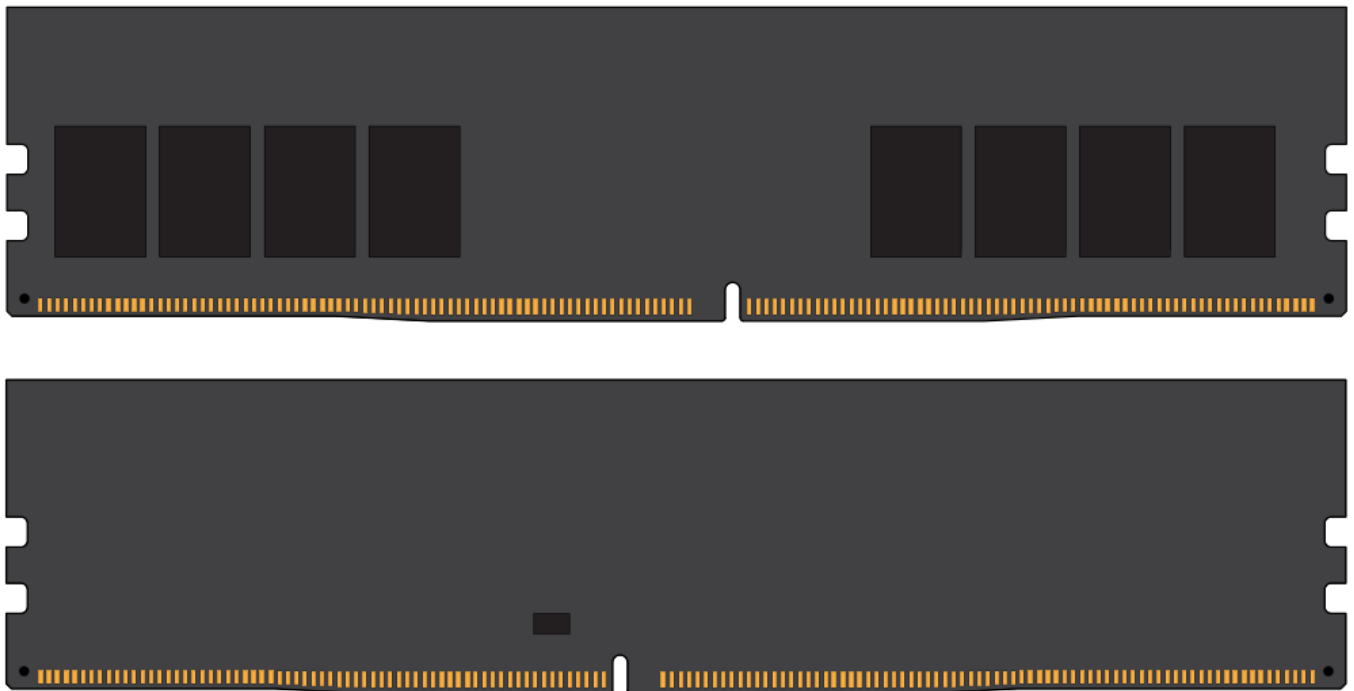

All measurements are in millimeters.
 (Tolerances on all dimensions are ± 0.12 unless otherwise specified)

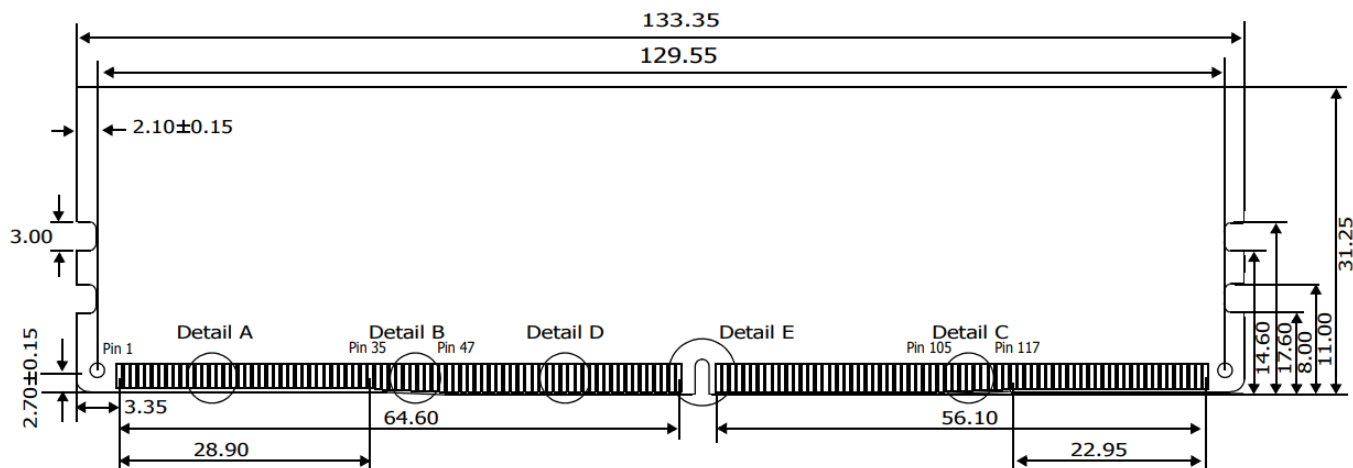

The product images shown are for illustration purposes only and may not be an exact representation of the product.

Kingston reserves the right to change any information at anytime without notice.

FOR MORE INFORMATION, GO TO HYPERXGAMING.COM

All Kingston products are tested to meet our published specifications. Some motherboards or system configurations may not operate at the published HyperX memory speeds and timing settings. Kingston does not recommend that any user attempt to run their computers faster than the published speed. Overclocking or modifying your system timing may result in damage to computer components.



HyperX is a division of Kingston.

©2019 Kingston Technology Corporation, 17600 Newhope Street, Fountain Valley, CA 92708 USA.

All rights reserved. All trademarks and registered trademarks are the property of their respective owners.

Document No. 4809080A

hyperxgaming.com

Documents / Resources

	HyperX HX430C15FB3/8 8GB 1G x 64-Bit DDR4-3000 CL15 288-Pin DIMM Memory Module [pdf] User Guide HX430C15FB3 8, 8GB 1G x 64-Bit DDR4-3000 CL15 288-Pin DIMM Memory Module, HX430C15FB3 8 8GB 1G x 64-Bit DDR4-3000 CL15 288-Pin DIMM Memory Module
---	--

References

- [HyperX | High Quality Gaming Gear](#)
- [HyperX | High Quality Gaming Gear](#)