Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

DUMOS ANMHLWT

DUMOS Small Standing Desk User Manual

Model: ANMHLWT | Brand: DUMOS

1. Introduction

This manual provides essential information for the assembly, operation, maintenance, and troubleshooting of your DUMOS Small Standing Desk. This mobile and portable workstation is designed to offer a flexible and ergonomic solution for various environments, including home offices, dormitories, and living rooms. Its adjustable height feature allows for seamless transitions between sitting and standing positions, promoting a more active and comfortable work routine.



Image 1.1: The DUMOS Small Standing Desk in Pure White, featuring a laptop and a coffee cup on its surface, demonstrating its use as a compact workstation.

2. Safety Information

- **Weight Capacity:** Do not exceed the maximum load capacity of 33 lbs (15 kg) on the desktop. Overloading can cause instability and damage.
- **Stability:** Ensure all locking wheels are engaged when the desk is stationary to prevent accidental movement.
- **Movement:** When moving the desk, ensure no items are precariously placed on the desktop. Unlock the wheels before moving and lock them once in the desired position.
- **Children and Pets:** Keep children and pets away from the desk during height adjustment to prevent injury.
- **Assembly:** Follow all assembly instructions carefully. Ensure all screws and fasteners are tightened securely before use.
- **Placement:** Place the desk on a flat, stable surface. Avoid placing it near heat sources or in direct sunlight for prolonged periods.

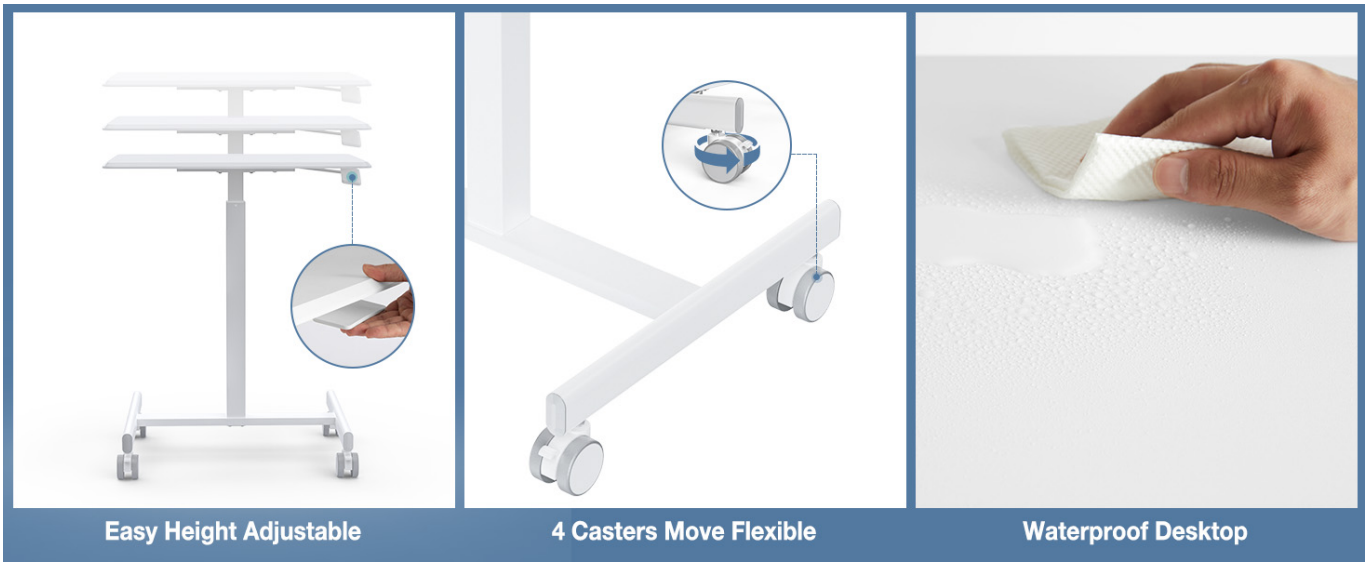

Image 2.1: An illustration highlighting the desk's strong load capacity, indicating it can safely support up to 33 lbs.

3. Package Contents

Before beginning assembly, please verify that all components listed below are present and undamaged. If any parts are missing or damaged, please contact customer support.

- Desktop Surface (MDF)
- H-Frame Steel Base
- Pneumatic Lifting Mechanism Column
- 360° Swivel Casters (4 pieces, 2 with locking mechanism)
- Assembly Hardware (screws, washers, etc.)
- Installation Tools
- Instruction Manual (this document)



Image 3.1: An exploded view illustrating the main components of the DUMOS Small Standing Desk, including the desktop, central column, H-frame base, and casters.

4. Setup and Assembly Instructions

Please follow these steps carefully to assemble your DUMOS Small Standing Desk. It is recommended to assemble the desk on a soft, clean surface to prevent scratches.

1. **Attach Casters to Base:** Securely attach the four 360° swivel casters to the H-frame steel base using the provided hardware. Ensure the two locking casters are positioned on the same side for easier access.
2. **Connect Column to Base:** Insert the pneumatic lifting mechanism column into the designated slot on the H-frame base. Fasten it securely with the appropriate screws.
3. **Attach Desktop to Column:** Carefully align the desktop surface with the top of the pneumatic column. Attach the desktop using the remaining hardware, ensuring it is centered and firmly secured.
4. **Final Check:** Once assembled, gently shake the desk to ensure all connections are stable and tight. Lock the wheels before placing any items on the desktop.



Image 4.1: A visual representation of key features including the easy height adjustment mechanism, the flexibility of the 4 casters, and the waterproof desktop surface.

5. Operating Instructions

5.1 Adjusting Height

The DUMOS Small Standing Desk features a pneumatic lifting mechanism for smooth height adjustment. The desk can be adjusted between 28.5 inches (72.4 cm) and 42.5 inches (108 cm).

1. **To Raise:** Gently lift the adjustment lever located under the desktop while applying slight upward pressure to the desktop. The pneumatic cylinder will assist in raising the desk. Release the lever at the desired height.
2. **To Lower:** Gently lift the adjustment lever while applying slight downward pressure to the desktop. The desk will lower smoothly. Release the lever at the desired height.

5.2 Moving the Desk

The desk is equipped with four 360° swivel casters for easy mobility. Two of these casters have locking mechanisms.

- **To Move:** Ensure the two locking casters are in the unlocked position. Gently push the desk to your desired location.
- **To Secure:** Once the desk is in position, engage the locking mechanism on both locking casters by pressing down on the lever. This will prevent the desk from rolling.



Image 5.1: Demonstrating the desk's versatility for both sitting and standing use, suitable for various activities from casual work to formal

presentations.

6. Maintenance

- **Cleaning:** The MDF desktop is easy to clean. Use a soft, damp cloth with mild soap and water to wipe down surfaces. Avoid abrasive cleaners or harsh chemicals that could damage the finish.
- **Inspection:** Periodically check all screws and fasteners to ensure they remain tight. Retighten if necessary.
- **Caster Care:** Keep the casters free of dust, hair, and debris to ensure smooth rolling.
- **Pneumatic System:** The pneumatic lifting mechanism is designed for long-term performance and generally requires no special maintenance. Avoid applying excessive force or attempting to disassemble it.

7. Troubleshooting

- **Desk not adjusting height:**
  - Ensure the adjustment lever is fully engaged when attempting to raise or lower the desk.
  - Check if the pneumatic cylinder is obstructed.
  - Verify that the desk is not overloaded beyond its 33 lbs capacity.
- **Desk is wobbly:**
  - Check all assembly screws and tighten any that are loose.
  - Ensure the desk is placed on a flat, even surface.
- **Wheels not rolling smoothly:**
  - Check for debris (hair, lint) caught in the casters and remove them.
  - Ensure the locking mechanisms are fully disengaged.
- **Wheels not locking:**
  - Ensure the locking lever is fully pressed down.
  - Check for any obstructions preventing the lock from engaging.

8. Specifications



Image 8.1: A side view of the DUMOS Small Standing Desk, illustrating its profile and the adjustable height mechanism.

Feature	Detail
Model Number	ANMHLWT
Brand	DUMOS
Color	Pure White
Product Dimensions (D x W x H)	19"D x 25.7"W x 42.5"H (48.3cm D x 65.3cm W x 108cm H)
Minimum Height	28.5 Inches (72.4 cm)
Maximum Height	42.5 Inches (108 cm)
Item Weight	23.8 Pounds (10.8 kg)

Feature	Detail
Maximum Load Capacity	33 lbs (15 kg)
Top Material Type	Wood (MDF)
Base Material	Metal (Steel)
Lifting Mechanism	Pneumatic
Special Features	Adjustable Height, Rolling Casters (2 lockable)
Required Assembly	Yes (Includes all assembly tools)

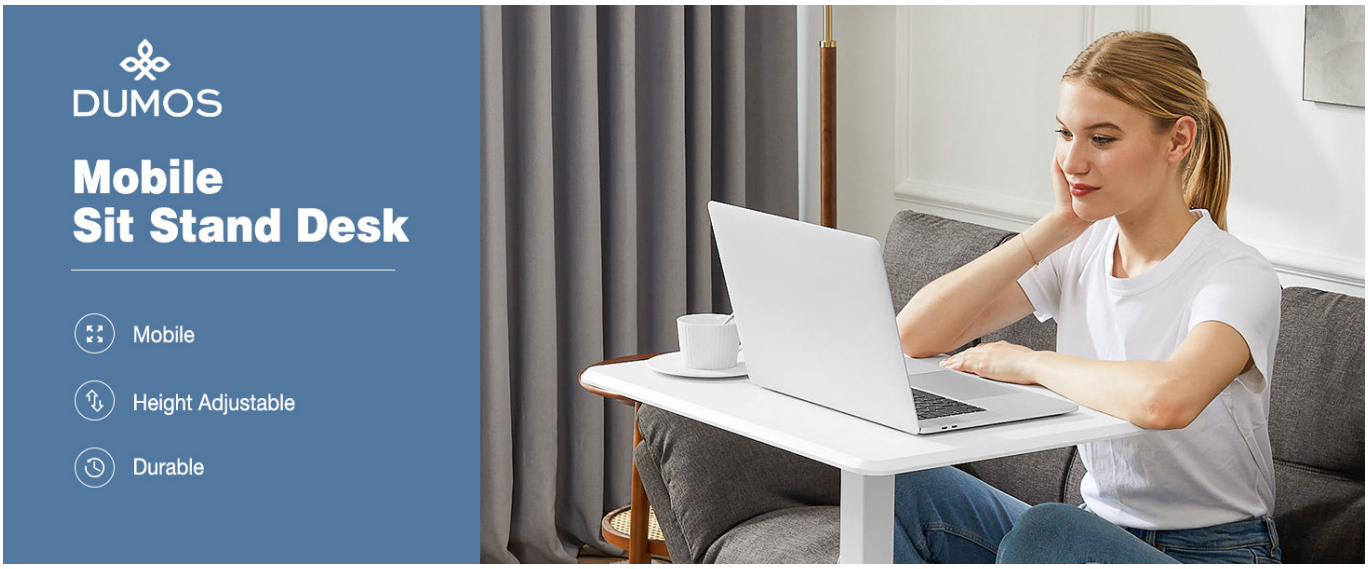

Image 8.2: A diagram illustrating the precise dimensions of the DUMOS Small Standing Desk, including desktop size, height range, and base footprint.

9. Warranty and Support

Your DUMOS Small Standing Desk comes with a **Limited Warranty**. Please refer to the warranty card included in your package for specific terms and conditions.

For technical support, missing parts, or warranty claims, please contact DUMOS customer service through the retailer's platform or visit the official DUMOS website for contact information.

Online Support: For additional resources and FAQs, please visit the DUMOS brand store on Amazon: DUMOS Store

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0F7L6LQ7D

More documents and user manuals: **https://manuals.plus/**