

COHYAN Wireless Microphone

COHYAN K18 Wireless Voice Amplifier User Manual

Model: Wireless Microphone

1. INTRODUCTION

Thank you for choosing the COHYAN K18 Wireless Voice Amplifier. This portable and versatile device is designed to amplify your voice, making it ideal for various professional settings such as classrooms, meetings, yoga sessions, training, and tour guiding. Its compact design, powerful output, and advanced connectivity features ensure clear and effective communication while protecting your voice from strain.

This manual provides detailed instructions on how to set up, operate, and maintain your voice amplifier to ensure optimal performance and longevity.

2. PRODUCT FEATURES

- **Powerful Sound Output:** Delivers 10W of clear audio, covering areas up to 10,000 sq-ft, suitable for classrooms of up to 180 people.
- **Extended Battery Life:** Equipped with an 1800mAh battery, providing 8-10 hours of continuous use on a single charge.
- **Smart Battery Indicator:** Features a built-in LED screen for real-time battery level monitoring.
- **Compact & Lightweight Design:** Measures 3.14 x 1.65 x 4.25 inches and weighs only 0.24lb, ensuring ultra-portability and comfort during extended use.
- **Advanced Connectivity:** Supports Bluetooth 5.0 for seamless wireless connections and includes a TF card slot for versatile audio playback.
- **Versatile Wearing Options:** Designed with a sleek pearl chain, allowing for head-mounted, neck-hanging, belt clip, waist-hanging, or shoulder-hanging configurations.



10W Powerful Output

Delivers crisp, clear audio that can easily cover a room for 50 people

Figure 2.1: The COHYAN K18 amplifier delivers 10W powerful output for clear voice projection.

3. PACKAGE CONTENTS

Please check the box for the following items:

- COHYAN K18 Wireless Voice Amplifier Unit
- Wireless Headset Microphone
- Type-C Charging Cable
- Pearl Chain Lanyard
- Waist Belt Clip
- User Manual



Figure 3.1: Main components of the COHYAN K18 Wireless Voice Amplifier package.

4. SETUP GUIDE

4.1 Charging the Amplifier

Before first use, fully charge the amplifier. The LED screen will indicate the battery level.

1. Connect the provided Type-C charging cable to the charging port on the amplifier.
2. Connect the other end of the cable to a standard USB power adapter (not included) or a computer USB port.
3. The LED display will show charging progress. A full charge typically takes 2.5-3 hours.

Type-C Fast Charging



Convenient Type-C charging port for on-the-go charging

Figure 4.1: Type-C Fast Charging port for convenient power replenishment.

4.2 Wearing the Amplifier

The COHYAN K18 offers multiple ways to wear it for maximum comfort and convenience:

- **Neck-hanging/Shoulder-hanging:** Use the pearl chain lanyard to wear the amplifier around your neck or over your shoulder.
- **Waist-hanging:** Attach the waist belt clip to the amplifier and secure it to your belt or waistband.
- **Back Clip:** Utilize the integrated back clip to attach the amplifier directly to clothing or a pocket.

3 Ways to Wear The Speaker

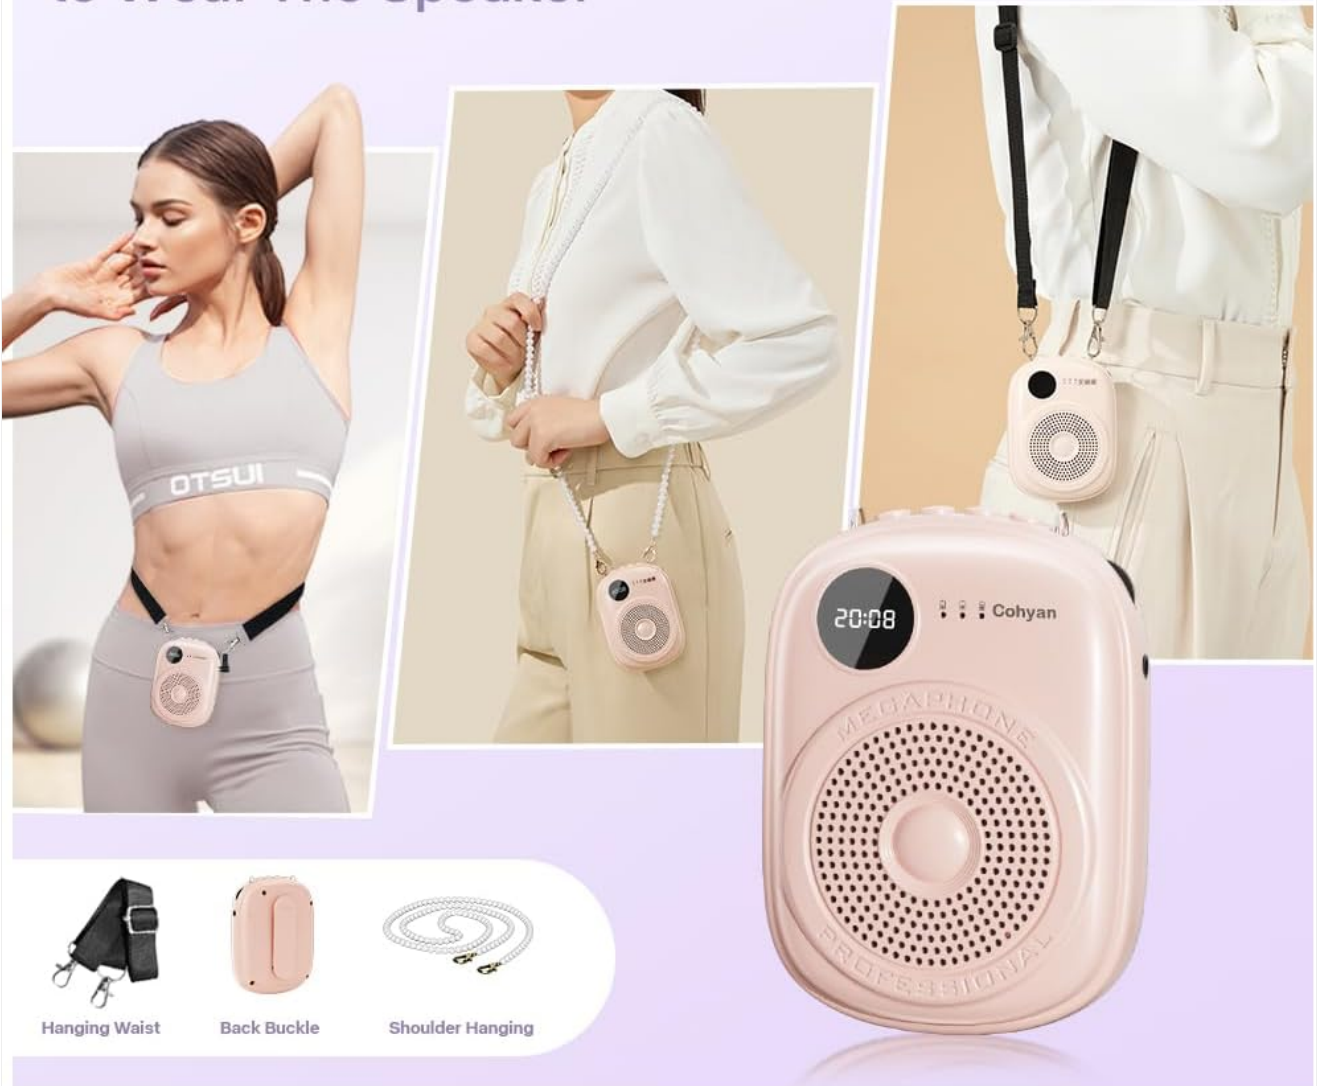


Figure 4.2: Various wearing options for the COHYAN K18 amplifier.

4.3 Connecting the Wireless Microphone

The wireless microphone is pre-paired with the amplifier. Simply turn on both devices, and they should connect automatically.

1. Turn on the voice amplifier.
2. Turn on the wireless headset microphone.
3. The microphone will automatically connect to the amplifier. If connection fails, refer to the troubleshooting section.

5. OPERATING INSTRUCTIONS

5.1 Power On/Off

- To power on, press and hold the power button until the LED screen illuminates.
- To power off, press and hold the power button again until the screen turns off.

5.2 Voice Amplification

Once the amplifier and microphone are connected, speak into the microphone. Your voice will be amplified through the speaker.

- Adjust the volume using the dedicated volume control buttons on the amplifier.
- For optimal performance and to avoid feedback, keep the microphone at a proper distance from the amplifier and ensure it is not directly facing the speaker.

5.3 Bluetooth Playback

Connect your smartphone or other Bluetooth-enabled device to the amplifier to play audio.

1. Ensure the amplifier is powered on and in Bluetooth mode (indicated on the LED screen).
2. On your device, search for Bluetooth devices and select "COHYAN K18" to pair.
3. Once paired, you can play audio from your device through the amplifier.

5.4 TF Card Playback

The amplifier supports TF card playback for pre-recorded audio.

1. Insert a TF card (up to 64GB, not included) with audio files into the TF card slot on the amplifier.
2. The amplifier will automatically switch to TF card playback mode.
3. Use the control buttons to play, pause, skip tracks, or adjust volume.

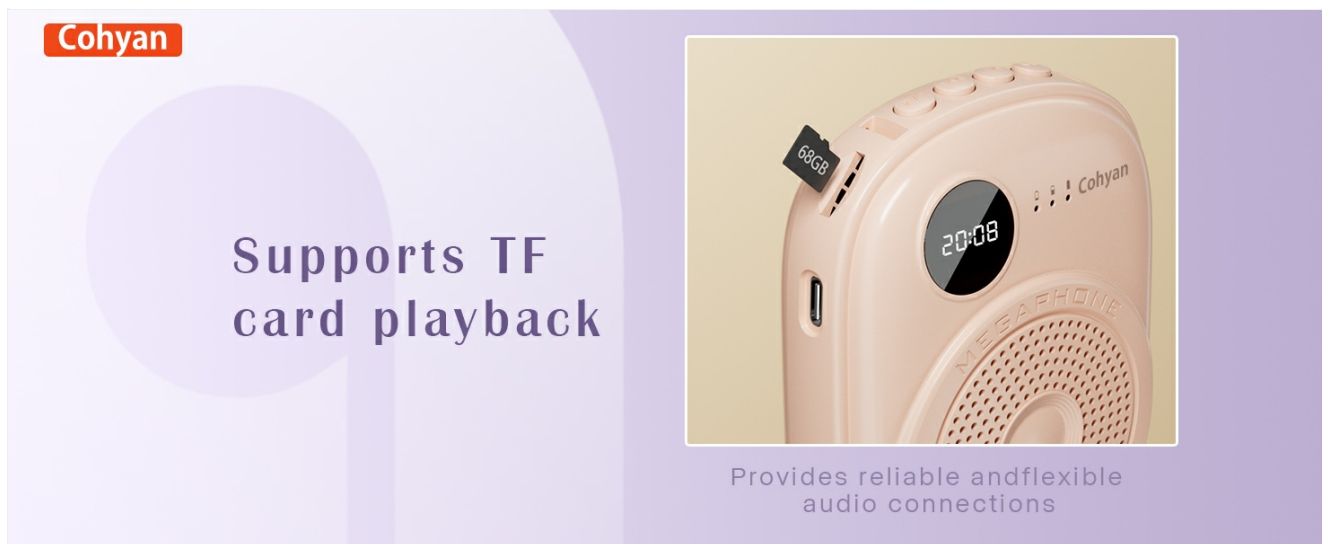


Figure 5.1: The TF card slot allows for direct audio playback from a memory card.

6. MAINTENANCE

Proper maintenance ensures the longevity and optimal performance of your COHYAN K18 Voice Amplifier.

- **Cleaning:** Use a soft, dry cloth to wipe the surface of the amplifier and microphone. Do not use abrasive cleaners or solvents.
- **Storage:** Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- **Battery Care:** To preserve battery life, avoid fully discharging the battery frequently. Charge the device regularly, even if not in use for extended periods.
- **Handling:** Handle the device with care. Avoid dropping or subjecting it to strong impacts.

7. TROUBLESHOOTING

If you encounter issues with your COHYAN K18 Voice Amplifier, please refer to the following common problems

and solutions:

Problem	Possible Cause	Solution
No sound from amplifier	Amplifier is off; Microphone is off; Low battery; Microphone not paired.	Ensure amplifier and microphone are powered on; Charge the amplifier; Re-pair microphone if necessary.
Sound distortion or feedback	Microphone too close to speaker; Volume too high; Environmental interference.	Increase distance between microphone and amplifier; Reduce volume; Adjust microphone position (do not point directly at speaker).
Bluetooth connection issues	Amplifier not in pairing mode; Device too far; Interference.	Ensure amplifier is in Bluetooth mode; Move device closer; Restart both devices.
Battery not charging	Cable faulty; Power source issue; Charging port damaged.	Try a different Type-C cable and power source; Contact customer support if issue persists.

If the problem persists after trying these solutions, please contact COHYAN customer support for further assistance.

8. SPECIFICATIONS

Feature	Specification
Model Number	Wireless Microphone (K18)
Brand	COHYAN
Output Power	10W
Battery Capacity	1800mAh
Usage Time	8-10 hours
Charging Time	2.5-3 hours
Bluetooth Version	5.0
TF Card Support	Up to 64GB
Item Weight	0.24 lb (12 ounces)
Package Dimensions	7.72 x 5.83 x 2.05 inches
Color	K18 (Pink)
Manufacturer	COHYAN

9. WARRANTY AND SUPPORT

COHYAN is committed to providing high-quality products and excellent customer service. Your K18 Wireless Voice Amplifier comes with the following:

- **30-Day Return & Refund Policy:** Enjoy a hassle-free return and refund within 30 days of purchase if you are not satisfied.

- **36-Month Warranty:** The device is covered by a 36-month (3-year) warranty against manufacturing defects.
- **Lifetime Technical Support:** COHYAN provides lifetime technical support for your product.

For any questions, technical assistance, or warranty claims, please contact COHYAN customer support through the retailer's platform or visit the official COHYAN website.