



ICOM UT-30 Programmable Tone Encoder Unit Instructions

[Home](#) » [ICOM](#) » ICOM UT-30 Programmable Tone Encoder Unit Instructions

Contents [[hide](#)]

- [1 ICOM UT-30 Programmable Tone Encoder Unit](#)
- [2 SPECIFICATIONS](#)
- [3 SUBAUDIBLE TONE ENCODER PROGRAMMING CHART](#)
- [4 Documents / Resources](#)
- [5 Related Posts](#)




ICOM UT-30 Programmable Tone Encoder Unit



The UT-30 allows access to repeater stations that require subaudible tones superimposed on the transmit signal. 38 different tones are available and fully programmable. The UT-30 is factory programmed for 88.5Hz. Use the programming chart below to program the UT-30 for the required frequency.

SPECIFICATIONS

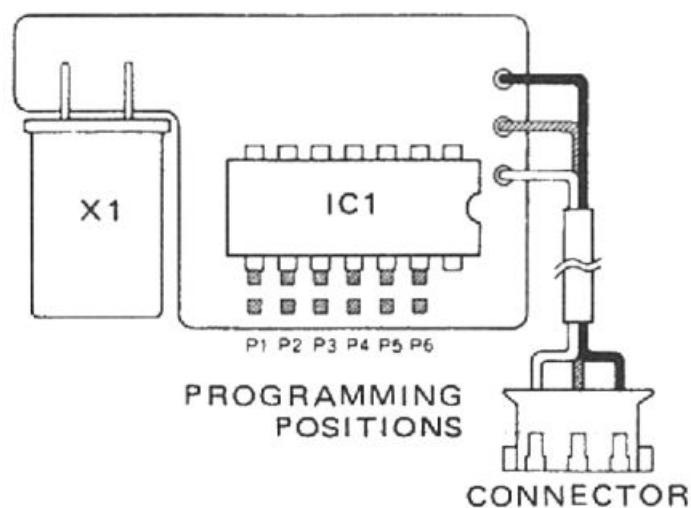

- Oscillation frequencies: 67.0 250.3Hz $\pm 0.3\%$
- Current drain: Less than 2mA

1 indicates pins to be soldered to program the UT-30 for specific tones

SUBAUDIBLE TONE ENCODER PROGRAMMING CHART

