Manuals+ — User Manuals Simplified.

ICY BOX IB-DK4090-C Display Hybrid Notebook Docking Station Instructions

Contents
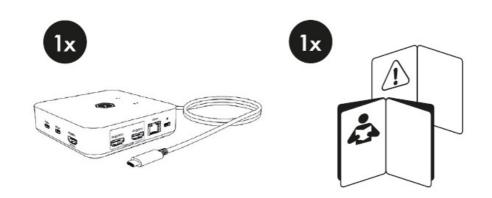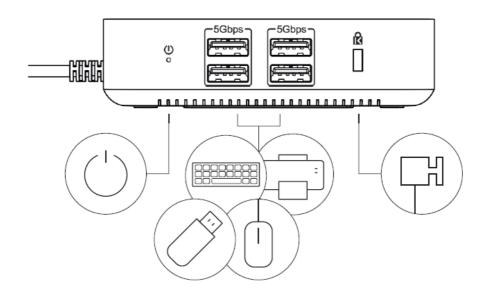
ICY BOX IB-DK4090-C Display Hybrid Notebook Docking Station

WHATS IN THE BOX

1x

1x

PORTS INFO

4K@60Hz 4K@60Hz 1Gbps

DisplayLink

1 2 1 Gbit/s

10Gbps 10Gbps 4K@60Hz

DP ALT

3

🎧

DISPLAYLINK

①
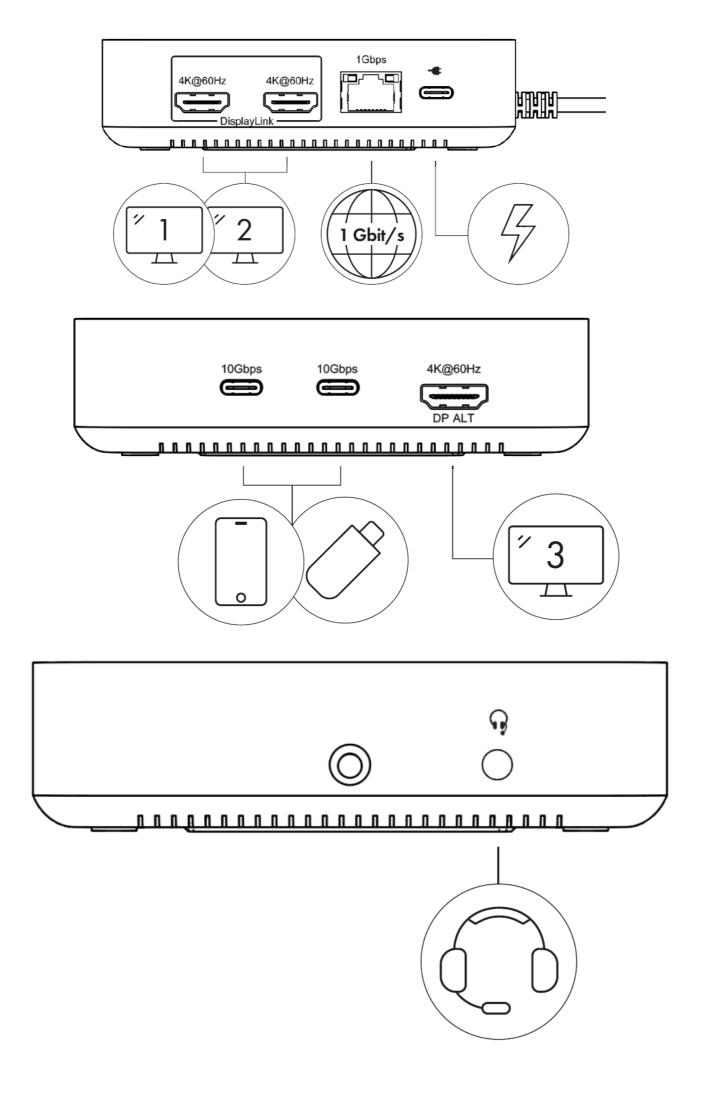
② www.synaptics.com/products
/displaylink-graphics/downloads

③

④

CONNECTION

②

③

(Tool not included)

VESA® 50x50
(mount not included)

SPECIFICATION

Legacy USB standards	Current USB standards	Data transfer rate
USB 3.0 = USB 3.1 (Gen 1)	= USB 3.2 Gen 1	= 5 Gbit/s
USB 3.1 = USB 3.1 (Gen 2)	= USB 3.2 Gen 2	= 10 Gbit/s
USB 3.2 (Gen 2x2)	= USB 3.2 Gen 2x2	= 20 Gbit/s
	= USB4® Gen 3x2	= 40 Gbit/s

Video matrix (Host PC = USB Type-C® DP Alt Mode + DisplayLink®, DP 1.4 HBR3), maximum resolutions						
	Input (plug-in)			Output		
Number of displays	HDMI® 1 (DisplayLink®)	HDMI® 2 (DisplayLink®)	HDMI® 3 (DP Alt Mode)v	Display 1	Display 2	Display 3
Triple video output	✓	✓	✓	3840x2160@60 Hz	3840x2160@60 Hz	3840x2160@60 Hz
Dual video output	✓	✓		3840x2160@60 Hz	3840x2160@60 Hz	
		✓	✓		3840x2160@60 Hz	3840x2160@60 Hz
	✓		✓	3840x2160@60 Hz		3840x2160@60 Hz
Single video output	✓			3840x2160@60 Hz		
		✓			3840x2160@60 Hz	
			✓			3840x2160@60 Hz
Video matrix (Host PC = USB 3.2 Gen 1 DisplayLink®, only Display 1 and Display 2), maximum resolutions						
	Inputs (plug-in)			Output		
Number of displays	HDMI® 1 (DisplayLink®)	HDMI® 2 (DisplayLink®)	HDMI® 3 (DP Alt Mode)	Display 1	Display 2	Display 3
Dual video output	✓	✓		3840x2160@60 Hz	3840x2160@60 Hz	
Single video output		✓			3840x2160@60 Hz	
	✓			3840x2160@60 Hz		

MORE INFO

www.icybox.de

www.quefairedemesdechets.fr

Documents / Resources

	ICY BOX IB-DK4090-C Display Hybrid Notebook Docking Station [pdf] Instructions IB-DK4090-C Display Hybrid Notebook Docking Station, IB-DK4090-C, Display Hybrid Notebook Docking Station, Hybrid Notebook Docking Station, Notebook Docking Station, Docking Station, Station

References

- **User Manual**