

[Manuals.plus](#) /

> [OLIGHT](#) /

> OLIGHT Perun 3 Mini Premium Headlamp & IMINI 2 Keychain Flashlight User Manual

OLIGHT Perun 3 Mini, IMINI 2

OLIGHT Perun 3 Mini Premium Headlamp & IMINI 2 Keychain Flashlight User Manual

Models: Perun 3 Mini, IMINI 2

1. INTRODUCTION

This manual provides detailed instructions for the safe and efficient use of your OLIGHT Perun 3 Mini Premium Headlamp and IMINI 2 EDC Rechargeable Keychain Flashlight. The Perun 3 Mini is a compact and powerful headlamp featuring multiple light modes and a dedicated charging case. The IMINI 2 is a small, convenient keychain flashlight with an integrated USB charging plug. Please read this manual thoroughly before operation.

2. SAFETY INFORMATION

- Do not shine the light directly into human or animal eyes.
- Keep out of reach of children.
- Ensure proper battery orientation when inserting or charging.
- Do not disassemble the product, as this may void the warranty and cause damage.
- Avoid exposing the product to extreme temperatures or corrosive substances.

3. PRODUCT OVERVIEW

The OLIGHT Perun 3 Mini Premium Headlamp and IMINI 2 Keychain Flashlight bundle offers versatile lighting solutions. The Perun 3 Mini is a compact, powerful headlamp with white and red light options, housed in a convenient charging case. The IMINI 2 is an ultra-portable keychain light with instant activation.



Image 1: Overview of the OLIGHT Perun 3 Mini Headlamp, its charging case, and the IMINI 2 keychain flashlight. The headlamp is shown mounted on its elastic head strap, and the IMINI 2 is displayed separately.

4. SETUP AND ASSEMBLY

4.1 Perun 3 Mini Headlamp

4.1.1 Attaching to Head Strap

The Perun 3 Mini can be easily attached to the included head strap for hands-free operation. The head strap features a mounting bracket with a slot for the headlamp's pocket clip.

1. Locate the mounting bracket on the head strap.
2. Align the pocket clip of the Perun 3 Mini with the slot on the bracket.
3. Gently push the headlamp into the bracket until it clicks securely into place.
4. To adjust the beam angle, rotate the headlamp within the bracket.
5. To remove, press the release button on the bracket and pull the headlamp free.

Your browser does not support the video tag.

Video 1: This video demonstrates the unboxing, components, and assembly of the OLIGHT Perun 3 Mini Headlamp, including how to attach it to the head strap and its magnetic base functionality. It also shows the charging case and IMINI 2 flashlight.

4.2 IMINI 2 Keychain Flashlight

4.2.1 Initial Use

The IMINI 2 activates instantly upon separation from its magnetic cap.

1. Detach the body of the IMINI 2 from its magnetic cap to turn the light on.
2. Attach the body back to the magnetic cap to turn the light off.

5. OPERATION

5.1 Perun 3 Mini Headlamp

5.1.1 White Light Modes

The Perun 3 Mini offers five white light modes: Moonlight, Low, Medium, High, and Turbo.

- **To Turn On/Off:** Press and hold the power button for approximately 2 seconds. The light will turn on in Moonlight mode. Press and hold again to turn off.
- **To Cycle Modes:** While the light is on, press and hold the power button to cycle through Low, Medium, and High modes. Release the button at your desired brightness.
- **Turbo Mode:** Double-click the power button to activate Turbo mode (1250 lumens). Double-click again to return to the previous mode.

Perun 3 Mini

COMPACT BRILLIANCE

Need a serious light without the bulk?
The Perun 3 Mini delivers up to 1,250 lumens in a light
form factor that fits in the palm of your hand.



Image 2: The Perun 3 Mini headlamp is shown emitting a powerful beam, highlighting its compact size and 1250-lumen output with a 155-meter beam distance.

5.1.2 Red Light Modes

The red light feature is useful for preserving night vision or signaling.

- **To Activate Red Light:** From the off state, double-click the power button to enter red light mode.
- **To Cycle Red Light Modes:** While in red light mode, press and hold the power button to cycle between Low Red, High Red, and SOS.

5.1.3 Operation with Charging Case

The Perun 3 Mini can be operated while docked in its charging case, allowing for seamless control and brightness adjustment.

- **To Turn On/Off:** While the headlamp is docked in the open charging case, press the display button on the case to turn the light on or off.
- **Stepless Dimming:** Press and hold the display button on the case for stepless brightness adjustment. Release at

the desired level.

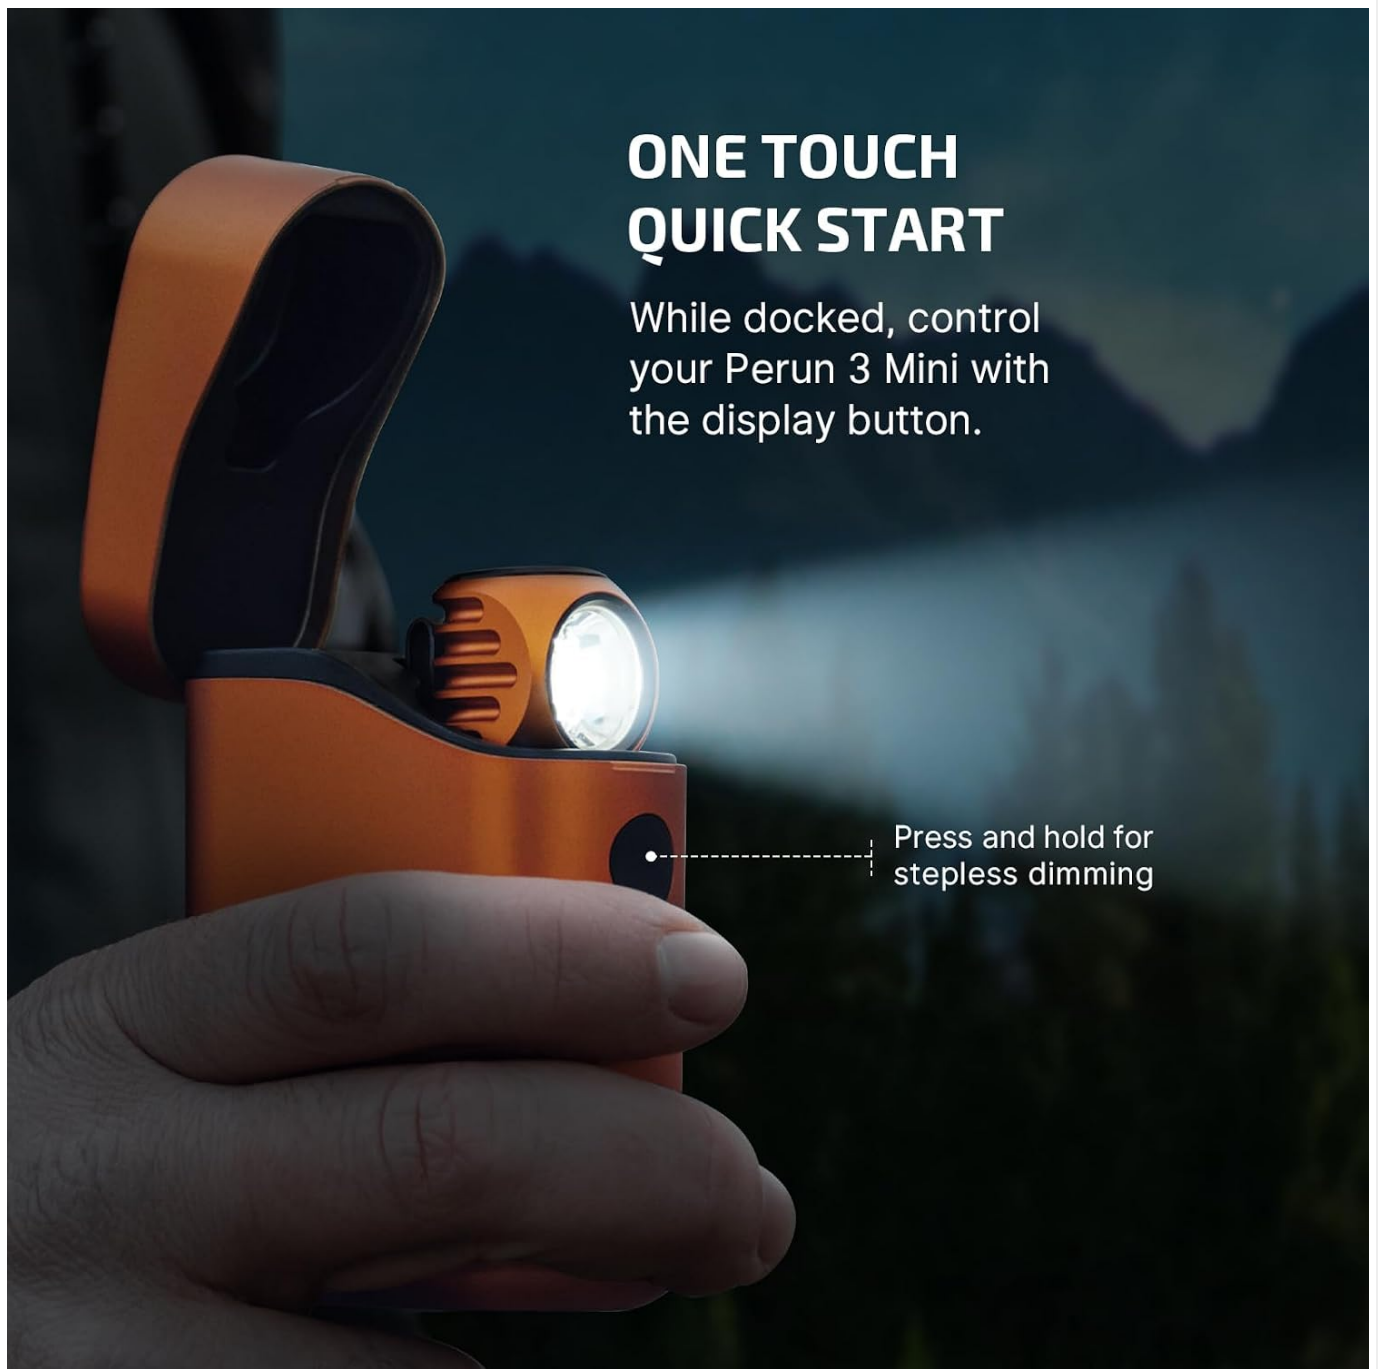


Image 3: A hand operates the Perun 3 Mini headlamp using the display button on its charging case, demonstrating the one-touch quick start and stepless dimming feature.

5.2 IMINI 2 Keychain Flashlight

The IMINI 2 is designed for quick and easy access to light.

- **Instant Activation:** Simply detach the body of the flashlight from its magnetic cap to turn it on.
- **Output:** The IMINI 2 provides a single, balanced output of 50 lumens.
- **Deactivation:** Reattach the body to the magnetic cap to turn the light off.

INSTANT ON/OFF

Ensuring that you have immediate access to light when you need it most. No more fumbling with a button to turn it on.



Image 4: The IMINI 2 keychain flashlight is shown separated from its magnetic cap, illustrating the instant on/off feature for immediate access to light.

6. CHARGING

6.1 Perun 3 Mini Charging Case

The Perun 3 Mini charging case not only recharges the headlamp but also serves as a portable power source.

- **Charging the Headlamp:** Place the Perun 3 Mini into the charging case. A green indicator light will confirm charging. The case can recharge the Perun 3 Mini up to five times.
- **Charging the Case:** Connect the included USB-C cable to the Type-C charging port on the case. The display window will show the charging progress and remaining battery percentage.



Image 5: The Perun 3 Mini charging case is shown recharging a smartphone via its USB-C port, demonstrating its capability as a portable power bank with a 5000mAh capacity.

6.2 IMINI 2 Keychain Flashlight

The IMINI 2 features a convenient integrated USB plug for charging.

- **To Charge:** Simply plug the integrated USB connector of the IMINI 2 directly into any standard USB-A port (e.g., on a computer, wall adapter, or power bank).
- No separate cable is required for charging.

INTEGRATED USB PLUG

No need to carry a separate cable, just plug the flashlight into a USB port for easy on-the-go charging.



Image 6: The IMINI 2 keychain flashlight is shown plugged directly into a laptop's USB port, illustrating its integrated USB charging feature.

7. MAINTENANCE

- **Cleaning:** Use a soft, damp cloth to clean the exterior of the headlamp and flashlight. Avoid harsh chemicals.
- **Storage:** Store the devices in a cool, dry place when not in use. For long-term storage, ensure batteries are partially charged (around 50%).
- **Battery Care:** Recharge the devices regularly to maintain battery health, even if not frequently used.

8. TROUBLESHOOTING

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Light not turning on	Low battery; Lockout mode (Perun 3 Mini); Improper assembly (IMINI 2)	Charge the device; Unlock Perun 3 Mini (if applicable, refer to full manual); Ensure IMINI 2 is fully detached from cap.
Charging not working	Cable/port issue; Device not properly seated in case (Perun 3 Mini)	Check USB-C cable and port; Ensure Perun 3 Mini is correctly placed in charging case; Ensure IMINI 2 USB is fully inserted.
Reduced brightness/runtime	Low battery; Battery degradation over time	Fully charge the device; Consider battery replacement if performance significantly degrades (contact support).

9. SPECIFICATIONS

9.1 OLIGHT Perun 3 Mini Headlamp

- **Max White Brightness:** 1250 Lumens
- **Max Beam Distance:** 155 meters
- **Light Source Type:** LED
- **White Light Modes:** Moonlight, Low, Medium, High, Turbo
- **Red Light Modes:** Low Red, High Red, SOS
- **Power Source:** Rechargeable Lithium Ion Battery
- **Material:** Plastic (body), Aluminum Alloy (headlamp)
- **Water Resistance Level:** Water Resistant
- **Runtime:** Up to 60 days (with charging case)
- **Mounting Type:** Head Mount

9.2 OLIGHT IMINI 2 Keychain Flashlight

- **Output:** 50 Lumens
- **Activation:** Instant On/Off by detaching/attaching magnetic cap
- **Charging:** Integrated USB Plug

10. WARRANTY AND SUPPORT

OLIGHT products are manufactured with high-quality materials and craftsmanship. For warranty information, technical support, or service inquiries, please refer to the official OLIGHT website or contact their customer service directly. Keep your purchase receipt for warranty claims.

For further assistance, visit the [OLIGHT Store on Amazon](#).

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B0FB3S36ZS>

More documents and user manuals: **<https://manuals.plus/>**