



Inland V83P Mechanical Keyboard User Manual

[Home](#) » [inland](#) » Inland V83P Mechanical Keyboard User Manual 

Contents

- 1 Inland V83P Mechanical Keyboard
- 2 System switching/ Working mode switching
- 3 Volume adjustment
- 4 LED status overview
- 5 Description of multimedia combination
- 6 Technical Specifications
- 7 VIA Key remapping software
- 8 Documents / Resources
 - 8.1 References





Inland V83P Mechanical Keyboard



Fully Customizable/ Hot Swappable/ RGB Lights


- **Factory Product Name:** Mechanical Keyboard
- **Factory Keyboard Model:** MK PRO V2
- **Support System:** (Win/ Android/Mac/ios)
- **Base Material:**ABS
- **Switch Support:**3pin or Spin mechanical switch
- **Power Cable Support:** USB Type-C
- **Keyboard Backlight :** All keys RGB luminous

System switching/ Working mode switching

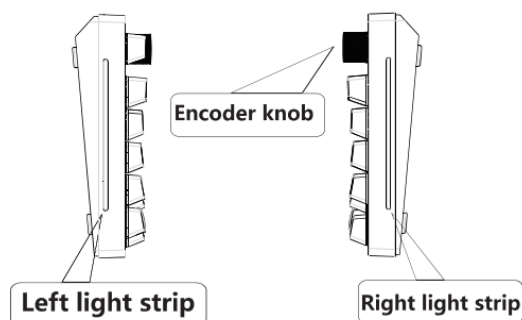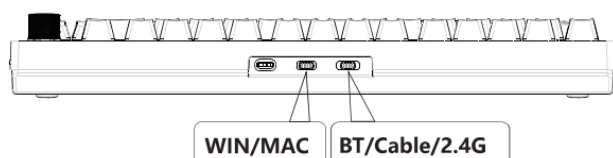


Bluetooth pairing /2.4G pairing

FN+1/2/3 Long press pairing and short press to switch channels

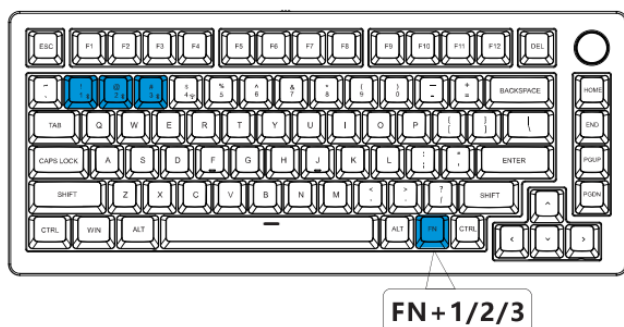


FN+4 Long press pairing and short press to switch channels

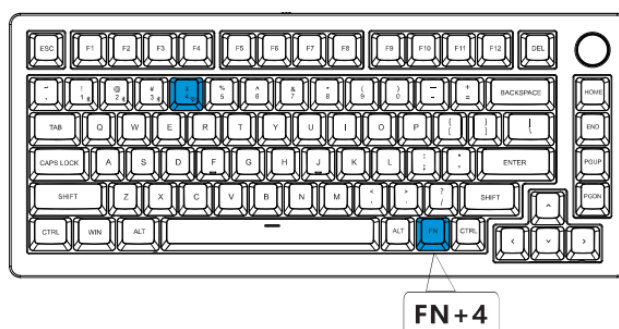

Lamp efficiency Mode switching /Restoring factory settings

FN+BACKSPACE Lamp efficiency Mode switching

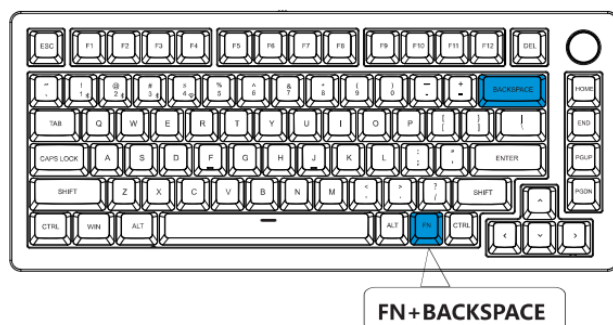


Press FN+ ESC key for 3 seconds to restore all backlit red lights flashing 3 times




Adjustment of backlight chromaticity

Adjust chromaticity by FN+PgUp in static mode

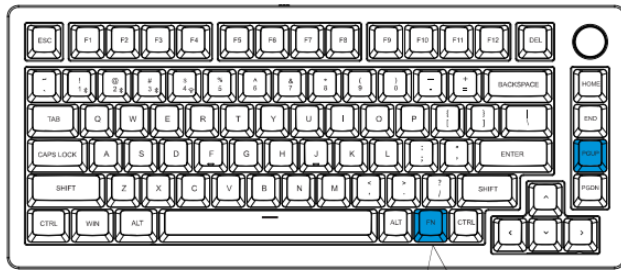


FN+PGUP

Adjust chromaticity by FN+PgDn in static mode

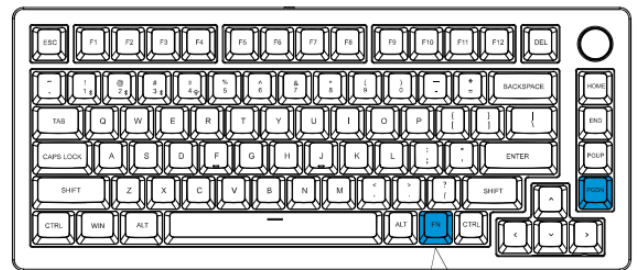


FN+PGDN

The breathing speed of backlight lamp effect

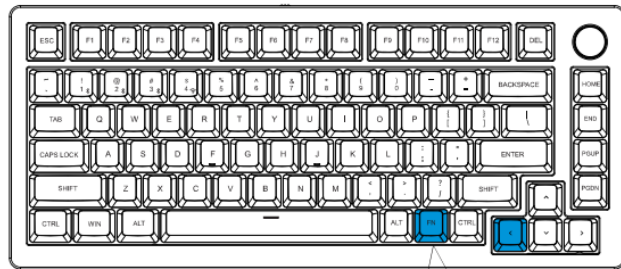


FN+left

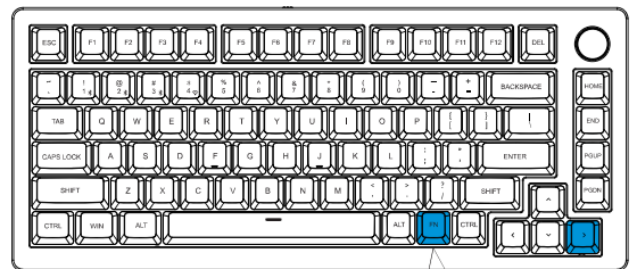

FN+right


Backlight brightness adjustment

FN+ UP = Backlight brightness increase

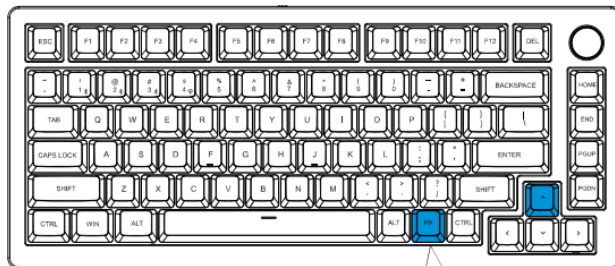

FN+Up


FN+ DN = Backlight brightness decrease

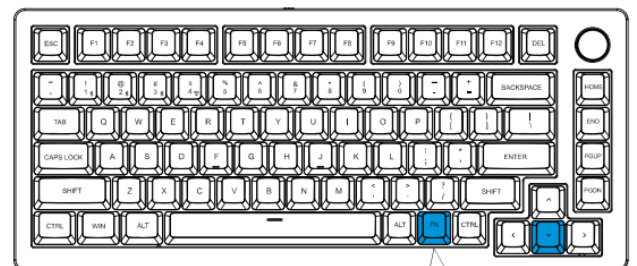


FN+Dn

Adjustment of backlight saturation

- FN+ Encoder rotation counterclockwise backlight saturation decrease
- FN+ Encoder rotates clockwise backlight saturation increase

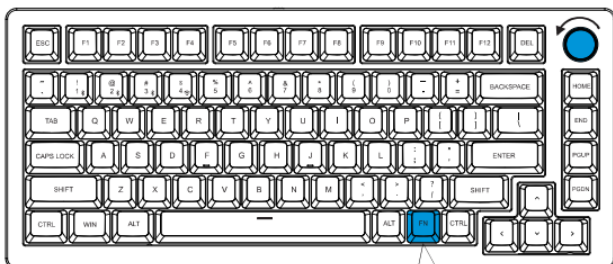



FN+ encoder rotates counterclockwise

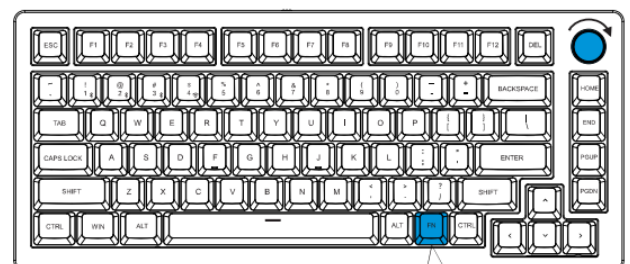

FN+ encoder rotates clockwise


Volume adjustment

- Encoder rotates volume clockwise increase
- Encoder rotates counterclockwise volume decrease

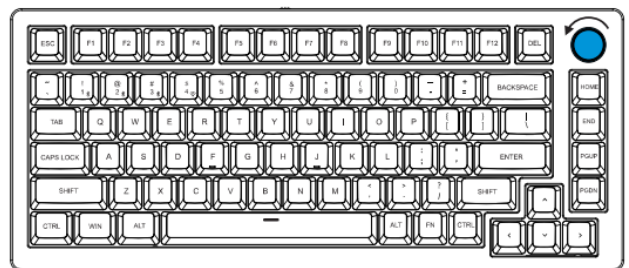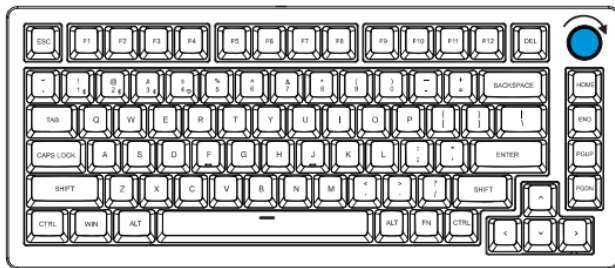


LED status overview


- Keyboard uppercase state This key is always red light Lowercase status follows the backlight

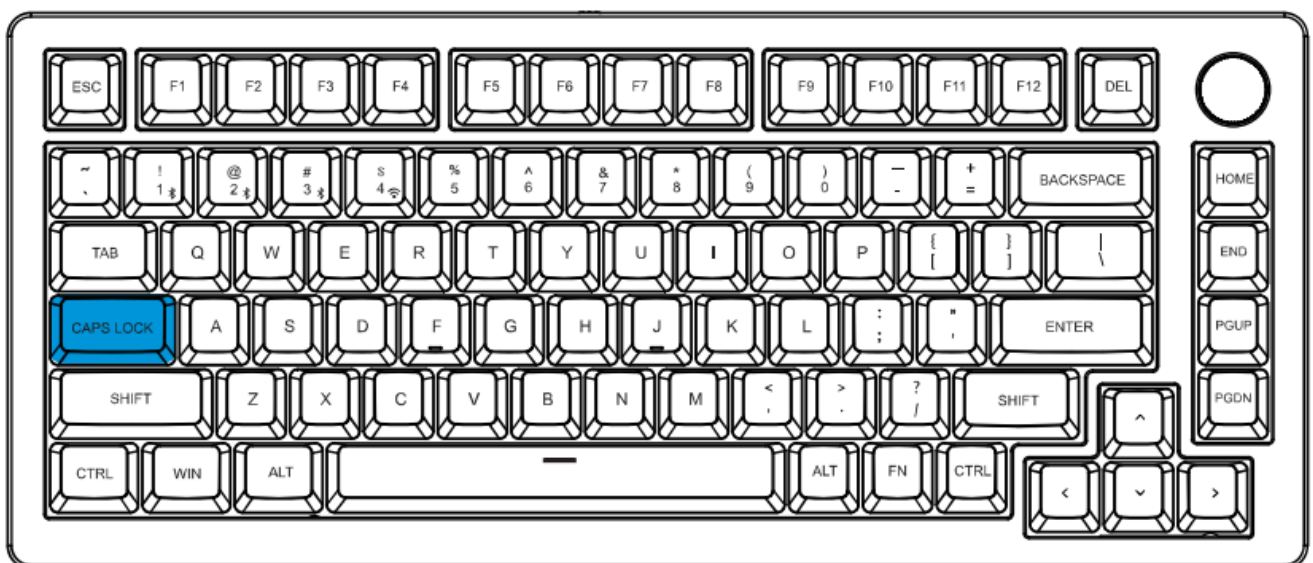

- In wireless mode, press FN+SPACE
 - The green light on the digital key indicates the percentage of battery power

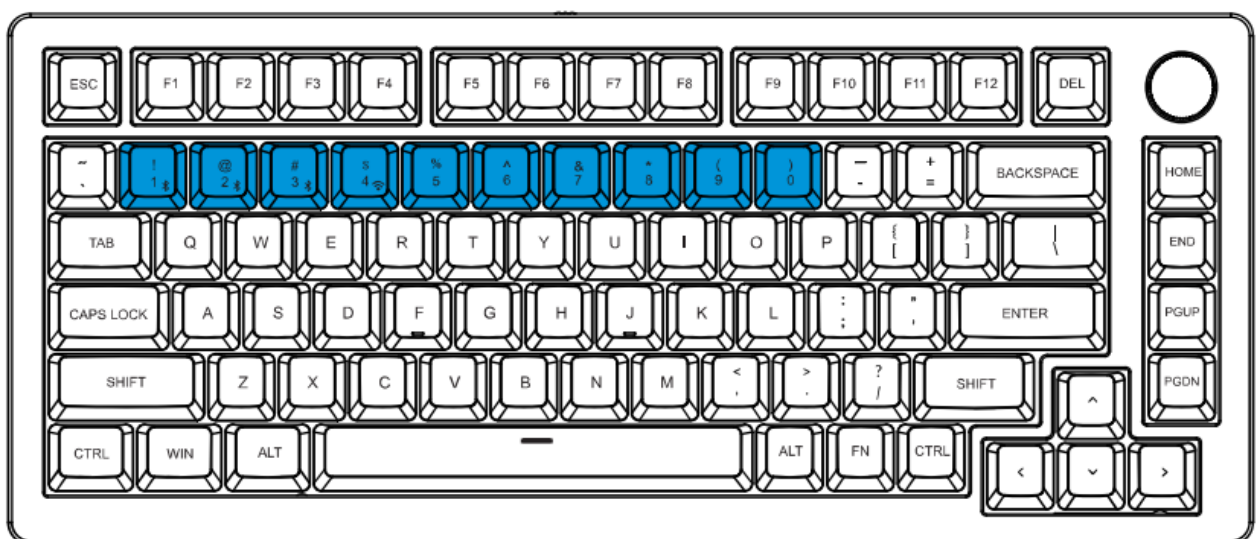

- The SPACE button blinking red indicates that the battery is low
- The SPACE key lights up red while the keyboard is charging

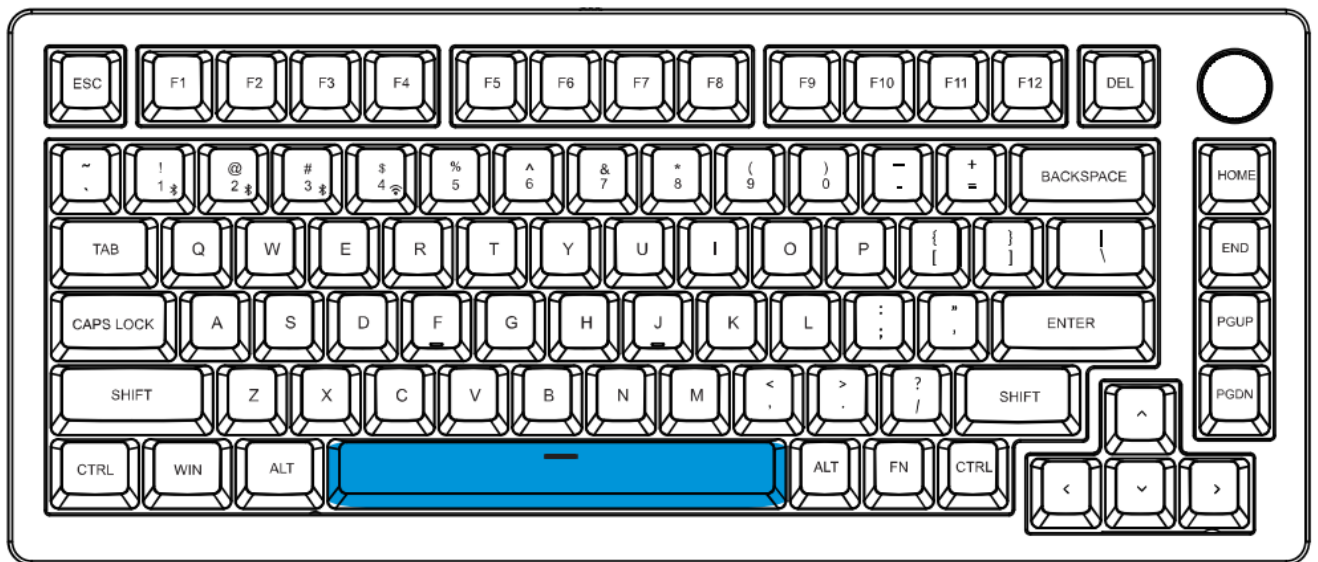

Description of multimedia combination

Source button (Press first)	Combine key (Then press)	Multimedia function (WIN)	Multimedia function (MAC Default)
FN+	F1	Brightness decrease	Brightness decrease
	F2	Brightness increase	Brightness increase
	F3	Mail	
	F4	Search	
	F5	calculator	
	F6	Music	
	F7	Last one	Last one
	F8	Pause / play	Pause / play
	F9	Next one	Next one
	F10	Mute	Mute
	F11	Volume decrease	Volume decrease
	F12	Volume increase	Volume increase

Support wireless mode switching/pairing

Bluetooth

- FN+ 1/ 2/3 (short press to switch, long press to pair)
- The Corresponding key light indicates that it flashes quickly when pairing, and flashes slowly when reconnecting. After the connection was successful, the key light stays on for 2 seconds and then returns to the overall backlight
- effect. If the pair cannot be paired within 1 minute, it will automatically enter the sleep state;
- When connecting back, if the connection is not successful within 20 seconds, it will automatically enter sleep.

- **2.4G**

- FN +4 (short press to switch, long press to pair)

Sleep mode

If there is no action in the wireless state for 10 minutes, the keyboard automatically enters the first level sleep. At this time, the light is off, the Bluetooth or 2.4G is in the connected state, and there is key output at the same time. When the keyboard does not work for 30 minutes, it enters the second-level hibernation state. At this time, the wireless of the keyboard is disconnected. No code will be sent when the keyboard is pressed for the first time, When the keyboard is automatically connected after waking up, there will be key output after the connection is normal.

Battery indicator

Lithium battery (3.7V): When the battery voltage is lower than 3.SV, the red indicator light of the space key on the keyboard flashes, and when charging, the red indicator light of the space key is always on; When fully charged, the space key will follow the backlight , and the keyboard will automatically shut down when it is lower than 3.0V. After automatic shutdown, the key is invalid, and the low battery indicator lights up, indicating that charging is required at this time.

Lithium battery power query

In the wireless state, press FN+ space key, and digital key 1-0 will turn on the green light to display the percentage of battery power

1. key indicates 10% battery power,
2. keys indicate 20% battery power

Technical Specifications

- **Keyboard size:** 332.8*141.4*45.6mm
- **Maximum brightness operating current :** < 300 mA
- **Working distance:** 8-1 Om
- **Lithium battery capacity:** 4000 mAh
- **Working voltage:** 3. 7V
- **Charger specifications:** SV= 1 A

VIA Key remapping software

- VIA is software that maps buttons, If VIA software does not recognize your keyboard Please contact us for technical support (VIA is valid only when the keyboard is connected to the computer via a data line)

Keyboard features

- **Tri modes:** Wired/Bluetooth/2.4G
- 83 key minimalist style, freely mapped key code and lamp effect Removable Power Cable
- Key switchs are freely customizable and support hot-swappable Built-in large capacity lithium battery
- A full keyboard RGB cool lighting effect
- Independent metal knob adjust volume

Restore factory settings

What if the keyboard fails, or if you want to go back to your original state after modifying the key code and light effect?

1. Press fn +ESC in order (wait 3 seconds); restore factory settings.
2. Download the correct firmware for your keyboard from our website, and then unplug the data line from the keyboard.
3. Unplug the space bar key cap and find the reset point of the PCB
4. Short-circuit the reset point for a long time, insert the keyboard data cable at the same time, and then disconnect the reset point, and the keyboard enters DFU mode.
5. You can then use the QMK toolbox to refresh the firmware.
6. Restore the keyboard to the factory settings again and press fn + ESC for 3 seconds.

FCC Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


What's in the Package?

- 1x83-Keys Tri model Mechanical keyboard
- 1x USB Receiver
- 1x USB Type-C Cable
- 1x User Manual
- 1x Quick Start Guide
- 1x 2-in-1 Keycap puller switch puller

Note

- Do not place the accessories and packaging parts of this product in contact with children in order to prevent asphyxiation caused by accidents.
- Do not expose the product to extreme temperatures below -10 °C (5 °F) or above 50 °C (131 °F) to maintain the service life of the keyboard.

Documents / Resources

 USER MANUAL	Inland V83P Mechanical Keyboard [pdf] User Manual 2A85Y-V83P, 2A85YV83P, V83P Mechanical Keyboard, Mechanical Keyboard, Keyboard, v83p
---	---

References

- [User Manual](#)