



inovonics EN5040-T High Power Repeater with Transformer User Guide

[Home](#) » [Inovonics](#) » inovonics EN5040-T High Power Repeater with Transformer User Guide 



PACOM Security Product Guide EN5040-T High Power Repeater with Transformer User Guide


Contents

- [1 Inovonics Wireless Solutions](#)
- [2 Features](#)
- [3 Water Resistant Pendant Transmitters](#)
- [4 Smoke Detector](#)
- [5 Billtrap Transmitter](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)

Inovonics Wireless Solutions

Inovonics' line of EchoStream® wireless intrusion detection devices and mobile duress (panic) buttons are designed with today's applications in mind. Supporting installations with thousands of security devices across campus, the EchoStream family of pendant transmitters, universal transmitters, motion detectors, and add-on receivers can connect to virtually any security system.

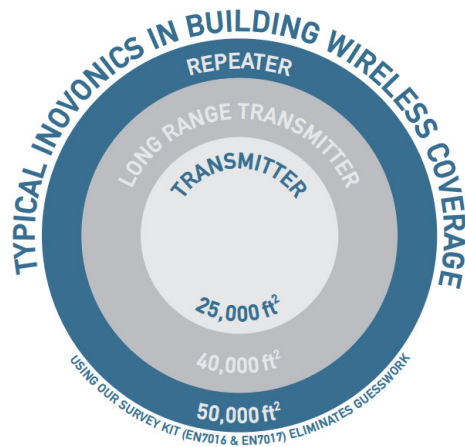



Unique to Inovonics is the high-power repeater mesh that intelligently amplifies transmissions from EchoStream transmitters. Providing coverage in all types of building construction, thus eliminating the need for the labor associated with wired installs. EchoStream provides the flexibility to cover small, medium, and large commercial buildings as well as complete campuses.



Features

- Wireless integration and alarm management
- RS232 communication with Pacom field controllers
- RF signal strength diagnostics
- Remote arming and disarming with transmitters
- Flexible supervision prevents false alarms if the pendant is taken off-site
- Support for up to 256 transmitters per field controller
- Can be seamlessly integrated with existing Pacom field controllers
- Transmitters and repeaters can be programmed via Pacom keypad or GMS software
- View transmitter and repeater status on the keypad
- Auto-detection of EN4200 receivers
- Intelligent redundancy ensures that critical alarms from a transmitter can be received by multiple EN4200 receivers at a site but only reported once to the GMS
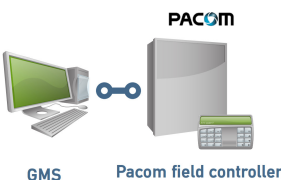
<div data-bbox="481 1326 721 1361" data-label="Text"> <p>PACOM – EN4200</p> </div> <div data-bbox="721 1288 837 1357" data-label="Image"> </div>
<div data-bbox="497 1391 825 1429" data-label="Text"> <p>8002 Controller – 256 pts.</p> </div>

Security System Configuration	Security Panel	Panel Interface / Receiver	Repeater Network
 <p>GMS Pacom field controller</p>			

Water Resistant Pendant Transmitters

The compact single or double-button pendant can be supervised. LED flashes when transmitting. Ideal for healthcare applications.

Single Button EN1223S

Double Button

EN1223D 
Wristband ACC623



Necklace Pendant Transmitters

Sleek single or double-button pendant that can be supervised. LED flashes when transmitting. Easy to wear with the included necklace.

Single Button EN1233S

Double Button

EN1233D



Belt Clip Pendant Transmitters

Sleek single or double button the pendant that can be supervised. LED flashes when transmitting. Durable belt clip included.

Single Button EN1235S

Double Button

EN1235D



Fixed Position Hold-Up Pendant Transmitters

Fixed position transmitters include mounting hardware for easy installation and a back tamper for removal alarms
 Single Button EN1235SF
 Double Button EN1235DF



Four-Condition Pendant Transmitters

Multiple-condition pendants require the use of a multi-condition receiver and application designed to support advanced functionality
 Four Condition EN1224
 Four Condition On/Off
 EN1224-ON



Multi-Condition Pendant Transmitters

Multiple-condition pendants require the use of a multi-condition receiver and application designed to support advanced functionality.

Three Condition EN1236D

Two Condition EN1238D



Universal Transmitters

Universal transmitters can be used with any standard N/O or N/C sensor and include a case tamper switch.

Universal Transmitter EN1210

With EOL Resistor

EN1210EOL

Door/Window Transmitter with Reed Switch

EN1210W



Universal Transmitters with Wall Tamper

Wall tamper switch adds protection from device removal.

Universal Transmitter with Wall Tamper EN1215EOL

With Reed Switch and Magnet EN1215WEOL



Dual Input Universal Transmitter

Dual-input universal transmitters can be used with any standard N/O or N/C sensor and include an additional N/C input.

Dual Input Universal Transmitter EN1212

With Wall Tamper EN1216

Long Range EN1252



Smoke Detector

The EN1244 features an onboard sounder, an LED indicator, a tamper, EchoStream® network supervision, and local test capability.



Wireless CO Detector

The EN1245 features an onboard sounder, a CO sensor, LED indicators, and local test capability to allow the user total visibility of its functionality.



Billtrap Transmitter

The EN1249 provides the flexibility for use in cash drawers for use in any financial or retail environment. Features case and back tamper, Smart Baiting with LED confirmation, and two or ten-second delay transmission modes.



Glassbreak Detector

The EN1247 uses an acoustic pattern recognition technology for proven performance, extended range, and increased immunity to false alarms.

20ft radius allows for multiple window coverage.



Glassbreak Detector

The EN1248 glass break detector is a wireless omnidirectional glass break detector, providing detection coverage

of 180°.

This is a direct replacement for the EN1247.



Wall Mount Motion Detector

The EN1260 features a digital signal processing that recognizes human signatures to reduce false alarms.

Curtain Lens Kit ACC672CT

Long Range Lens Kit (99ft) ACC672LR

Pet Alley Lens Kit ACC672PA



360° Ceiling Mount Motion Detector

The EN1265 four-element motion detector offers a 360° coverage pattern, case tamper switch, and up to an 18ft mounting height with the included lens.

High Ceiling

Lens (25ft)

ACC669



360° Ceiling Mount Motion Detector

The EN1266 360° ceiling mount motion detector is a four-element passive infrared intrusion detector for use in electronic security systems in ceiling mount applications.

This is a direct replacement for the EN1265.



Motion Detector with Pet Immunity

The EN1262 is designed for low-traffic applications and features pet immunity to reduce false alarms from animals. Includes a case tamper switch and optional wall tamper.



Wall Mount Motion Detector with Pet Immunity

The EN1263 motion detector with a pet, immunity is an advanced, fully supervised low-current wireless motion detector with the most advanced optics detection method for reliable system operation.

This is a direct replacement for the EN1260/EN1262.



High Traffic Four-Element Motion Detector

The EN126HT is developed specifically for high-traffic environments delivering approximately four years of battery life.

Includes case and back tamper, and features pet immunity up to 33lbs/1ft

Long Range Lens (60 ft)



Water Detector

The EN1751 water detector provides an early warning against damage caused by leaking appliances and standing water when used with the Honeywell® FP280 or Flair Electronics®

1010-H2OS36-EN1751

Probes are sold separately.



Temperature Detector

The EN1752 temperature detector enables programmable temperature threshold alarming for ambient temperature and external monitoring when used with the Honeywell®

T280R temperature probe.

Probe sold separately.



Serial Receivers – Direct-to-Panel Integration

Serial receivers integrate directly with partner panels used in commercial access control/intrusion. These

integrations leverage programming and wiring familiarity to expedite inclusion, or expansion, of wireless endpoints.

Panel integration list on the front



High Power Repeater

The high-power repeater amplifies transmissions from any transmitter. High Power Repeater with Transformer

EN5040-T 

Without Transformer EN5040

Weatherproof

Enclosure

ACC650



IP Gateway (requires an IP gateway license)

The EN4080 IP gateway combines EN4000 receiver and third-party IP gateway functionality into a single product.

LICBACNET

Enables output EchoStream messages into BACnet/IP systems

LICMQTT




Enables output EchoStream

messages into MQTT- based Amazon Web Services applications



Add-On Receivers

Add-on receivers cost-effectively add EchoStream wireless transmitters to any installation. Includes form C relays with dedicated alarm and fault output. The EN4216MR and EN4232MR are UL-listed, support multi-condition transmitters, and include event logging.

Receiver	Transmitters	Outputs
EN4204R	 4	4 Alarm / 1 Fault
EN4216MR	 16	5 Alarm / 1 Fault
EN4232MR	 32	11 Alarm / 1 Fault




The range and performance of any wireless product depend on the structure and environment in which it operates. Continual enhancements to our products may cause specifications to change without notice. Visit our website for UL information.

- Phone: 303.939.9336
- Toll-Free: 800.782.2709
 - Tech Support: 800.782.2709, option 2
 - Customer Service: 800.782.2709, option 1
 - sales@inovonics.com
 - www.invoices.com



Documents / Resources

	<p>inovonics EN5040-T High Power Repeater with Transformer [pdf] User Guide EN5040-T, High Power Repeater with Transformer, EN5040-T High Power Repeater with Transf ormer</p>
--	--

References

-  [Unparalleled network infrastructure | Inovonics](#)