



intel UG-20118 External Memory Interfaces Arria 10 FPGA IP Design Example User Guide


[Home](#) » [Intel](#) » intel UG-20118 External Memory Interfaces Arria 10 FPGA IP Design Example User Guide 

Contents

- 1 [intel UG-20118 External Memory Interfaces Arria 10 FPGA IP Design Example](#)
- 2 [Design Example Quick Start Guide for External Memory Interfaces Intel® Arria® 10 FPGA IP](#)
 - 2.1 [Design Example](#)
 - 2.2 [Creating an EMIF Project](#)
 - 2.3 [Intel Arria 10 EMIF Parameter Editor Guidelines](#)
 - 2.4 [Generating the Synthesizable EMIF Design Example](#)
 - 2.5 [Overview](#)
 - 2.6 [General Pin Guidelines](#)
- 3 [Design Example Description for External Memory Interfaces Intel Arria 10 FPGA IP](#)
- 4 [Document Revision History for External Memory Interfaces Intel Arria 10 FPGA IP Design Example User Guide](#)
- 5 [Documents / Resources](#)
 - 5.1 [References](#)
- 6 [Related Posts](#)



intel UG-20118 External Memory Interfaces Arria 10 FPGA IP Design Example

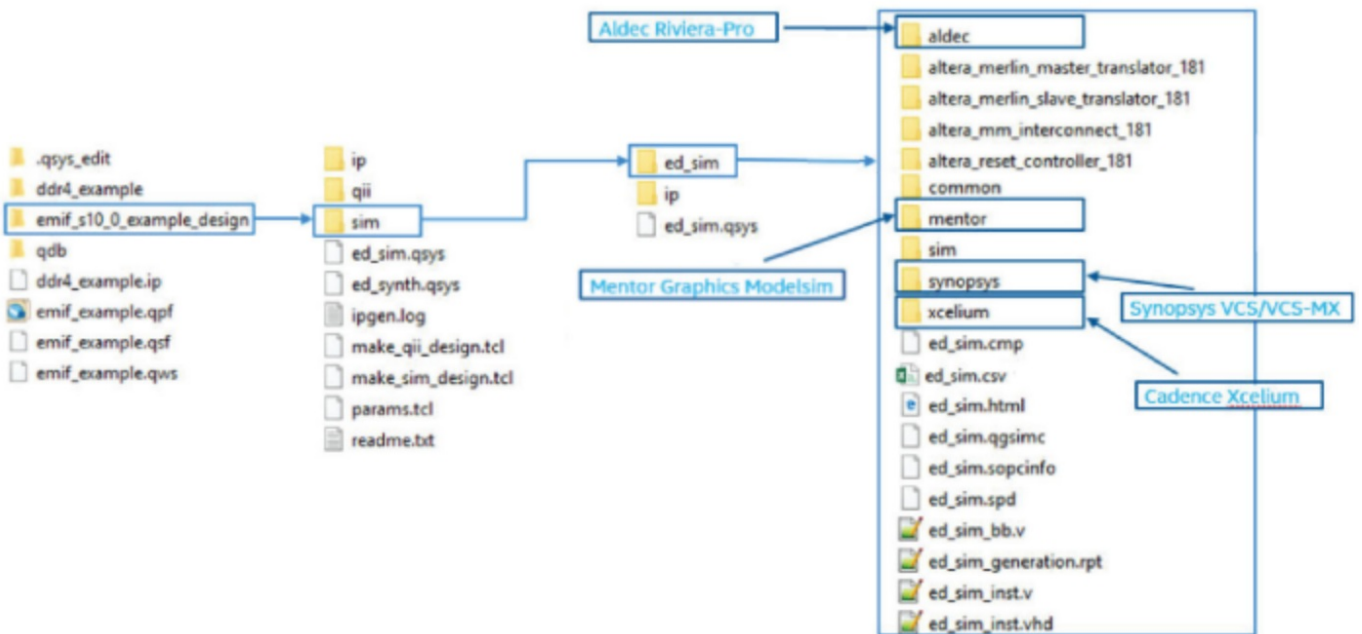

Design Example Quick Start Guide for External Memory Interfaces Intel® Arria® 10 FPGA IP

A new interface and more automated design example flow is available for Intel® Arria® 10 external memory interfaces.

The Example Designs tab in the parameter editor allows you to specify the creation of synthesis and simulation file sets which you can use to validate your EMIF IP.

You can generate an example design specifically for an Intel FPGA development kit, or for any EMIF IP that you generate.

Figure 1. General Design Example Workflows

Design Example

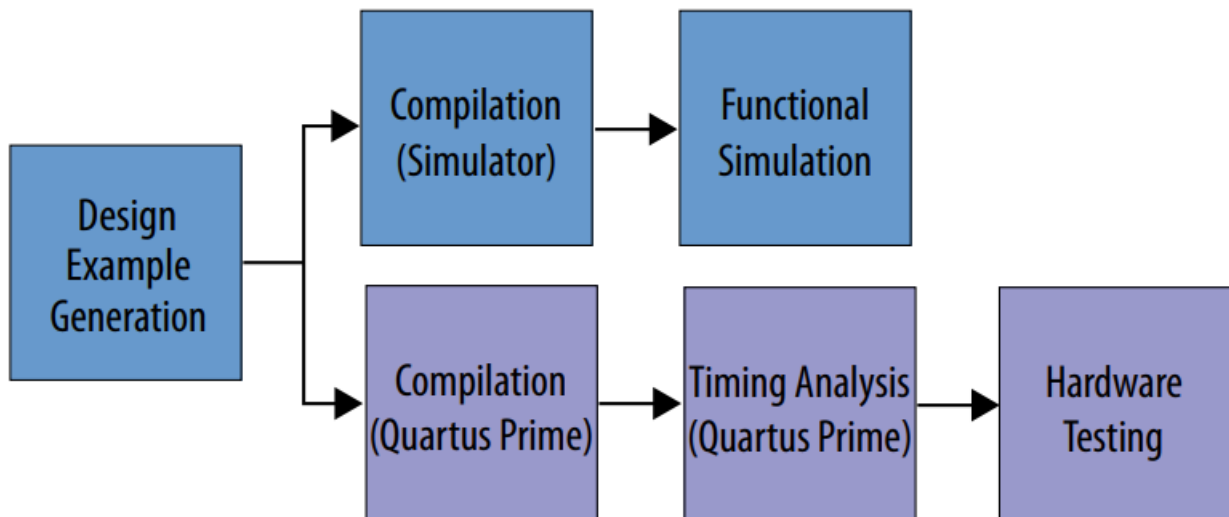


Figure 2. Generating an EMIF Example Design With an Intel Arria 10 Development Kit



Intel Corporation. All rights reserved. Intel, the Intel logo, and other Intel marks are trademarks of Intel Corporation or its subsidiaries. Intel warrants the performance of its FPGA and semiconductor products to current specifications in accordance with Intel's standard warranty but reserves the right to make changes to any products and services at any time without notice. Intel assumes no responsibility or liability arising out of the application or use of any information, product, or service described herein except as expressly agreed to in writing.


by Intel. Intel customers are advised to obtain the latest version of device specifications before relying on any published information and before placing orders for products or services.

- Other names and brands may be claimed as the property of others.

Creating an EMIF Project

For the Intel Quartus® Prime software version 17.1 and later, you must create an Intel Quartus Prime project before generating the EMIF IP and design example.

1. Launch the Intel Quartus Prime software and select File ► New Project Wizard. Click Next.

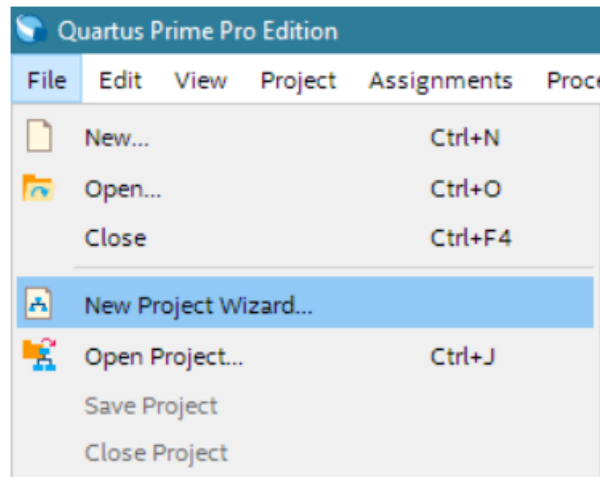

2. Specify a directory and name for the project that you want to create. Click Next.

New Project Wizard

Directory, Name, Top-Level Entity

What is the working directory for this project?

C:\intelFPGA_pro\17.1\example_design

What is the name of this project?

emif_example

What is the name of the top-level design entity for this project? This name is case sensitive and must exactly match the entity name in the design file.


emif_example

☐ This project uses a Partition Database (.qdb) file for the root partition

Use Existing Project Settings...

< Back Next > Finish Cancel Help

3. Verify that Empty Project is selected. Click Next two times.

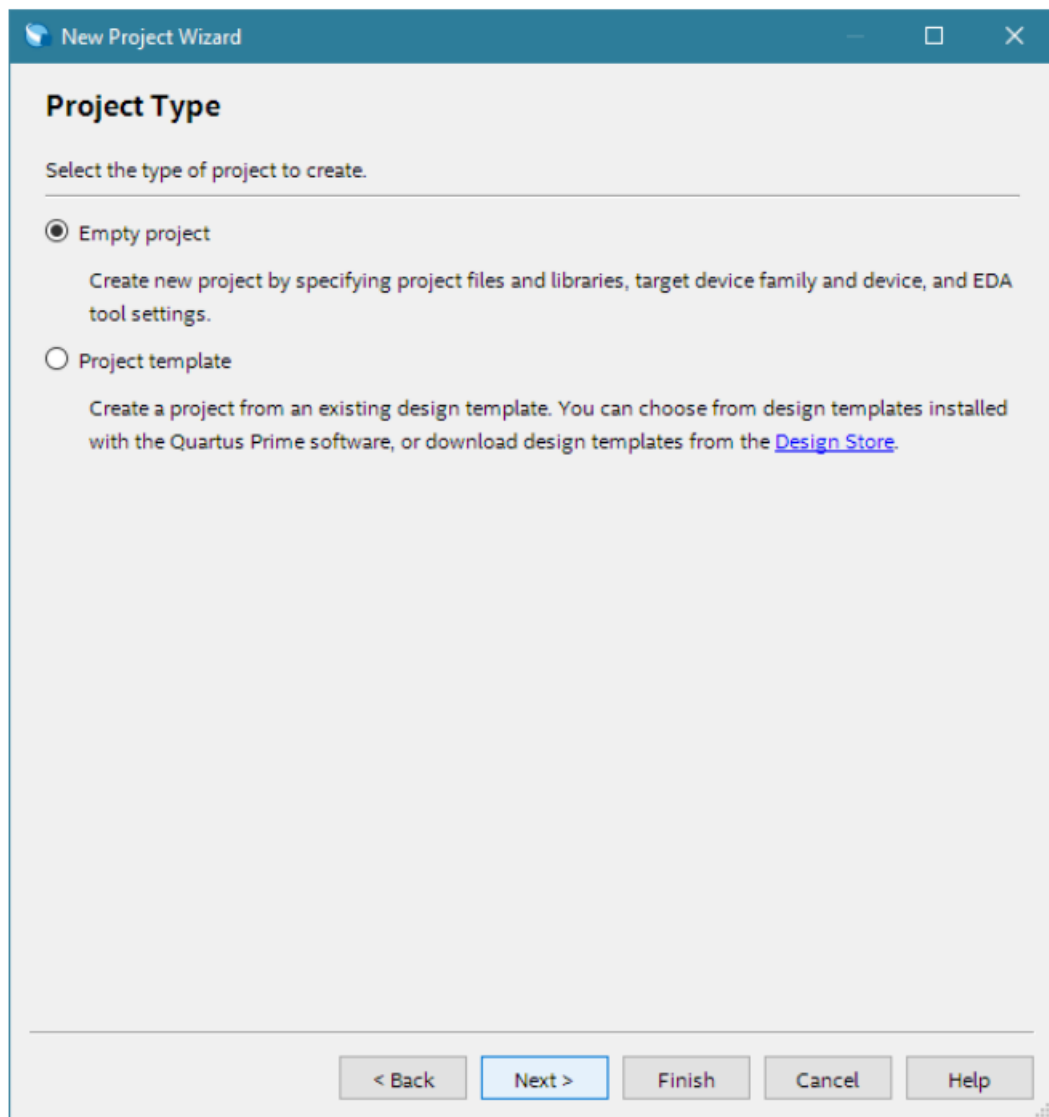

4. Under the Name filter, type the device part number.
5. Under Available devices, select the appropriate device.

New Project Wizard

Family, Device & Board Settings

Device | Board

Select the family and device you want to target for compilation. You can install additional device support with the Install Devices command on the Tools menu. To determine the version of the Quartus Prime software in which your target device is supported, refer to the [Device Support List](#) webpage.

Device family

Family: Arria 10 (GX/SX/GT)

Device: All

Target device

☒ Specific device selected in 'Available devices' list

☐ Other: n/a

Show in 'Available devices' list

Package: Any

Pin count: Any

Core speed grade: Any

Transceiver speed grade: Any

Name filter:

☒ Show advanced devices

Available devices:

Name	Core Voltage	ALMs	Total I/Os	GPIOs	HSSI Channels	PCIe Hard IP Blocks	Memory Bit
10AX115R4F40I3LG	0.9V	427200	650	342	66	3	55562240
10AX115R4F40I3SG	0.9V	427200	650	342	66	3	55562240
10AX115S1F45E15G	0.9V or 0.95V	427200	960	624	72	4	55562240

< >


< Back Next > Finish Cancel Help

6. Click Finish.


Generating and Configuring the EMIF IP

The following steps illustrate how to generate and configure the EMIF IP. The steps are similar regardless of the memory protocol that you are targeting.

1. In the IP Catalog window, select Intel Arria 10 External Memory Interfaces. (If the IP Catalog window is not visible, select View ► Utility Windows ► IP Catalog.)

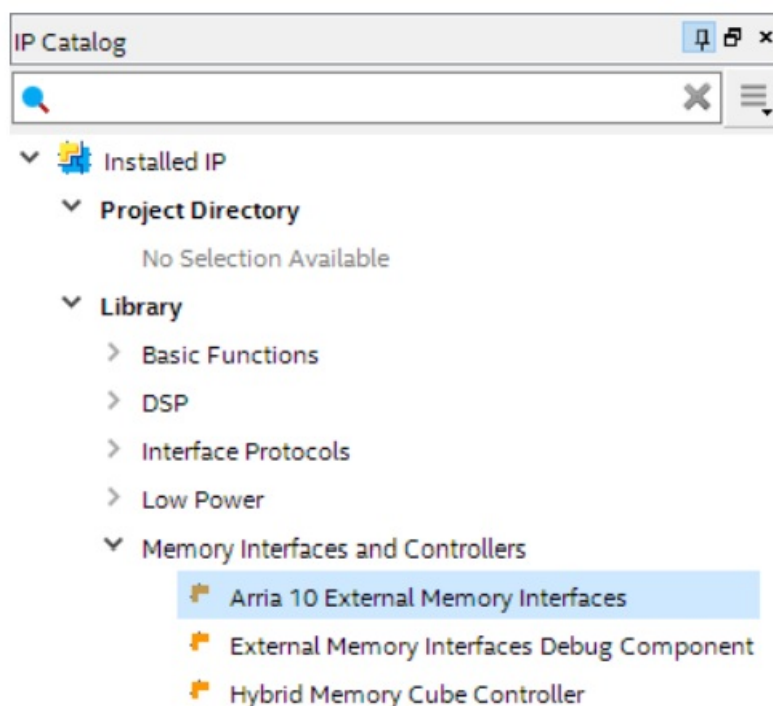

2. In the IP Parameter Editor, provide an entity name for the EMIF IP (the name that you provide here becomes the file name for the IP) and specify a directory. Click Create.

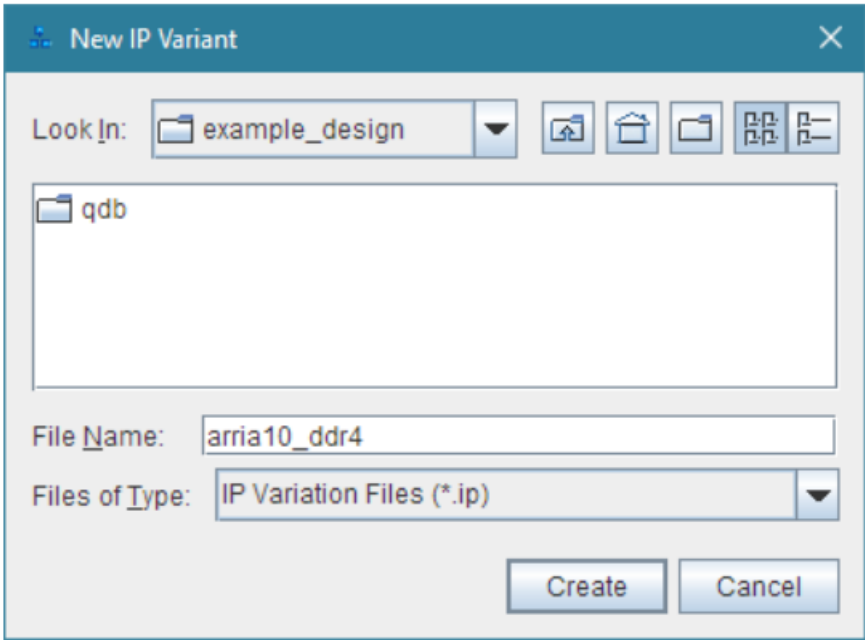

3. The parameter editor has multiple tabs where you must configure parameters to reflect your EMIF implementation:

Intel Arria 10 EMIF Parameter Editor Guidelines

Table 1. EMIF Parameter Editor Guidelines

Parameter Editor Tab	Guidelines
General	<p>Ensure that the following parameters are entered correctly:</p> <ul style="list-style-type: none">• The speed grade for the device.• The memory clock frequency.• The PLL reference clock frequency.

Memory	<ul style="list-style-type: none"> • Refer to the datasheet for your memory device to enter the parameters on the Memory tab. • You should also enter a specific location for the ALERT# pin. (Applies to DDR4 memory protocol only.)
Mem I/O	<ul style="list-style-type: none"> • For initial project investigations, you may use the default settings on the Mem I/O tab. • For advanced design validation, you should perform board simulation to derive optimal termination settings.
FPGA I/O	<ul style="list-style-type: none"> • For initial project investigations, you may use the default settings on the FPGA I/O tab. • For advanced design validation, you should perform board simulation with associated IBIS models to select appropriate I/O standards.
Mem Timing	<ul style="list-style-type: none"> • For initial project investigations, you may use the default settings on the Mem Timing tab. • For advanced design validation, you should enter parameters according to your memory device's datasheet.

Board	<ul style="list-style-type: none"> For initial project investigations, you may use the default settings on the Board tab. For advanced design validation and accurate timing closure, you should perform board simulation to derive accurate intersymbol interference (ISI)/ crosstalk and board and package skew information, and enter it on the Board tab.
Controller	Set the controller parameters according to the desired configuration and behavior for your memory controller.
Diagnostics	You can use the parameters on the Diagnostics tab to assist in testing and debugging your memory interface.
Example Designs	The Example Designs tab lets you generate design examples for synthesis and for simulation. The generated design example is a complete EMIF system consisting of the EMIF IP and a driver that generates random traffic to validate the memory interface.

For detailed information on individual parameters, refer to the appropriate chapter for your memory protocol in the Intel Arria 10 External Memory Interfaces IP User Guide.


Generating the Synthesizable EMIF Design Example

For the Intel Arria 10 development kits, there are presets that automatically parameterize the EMIF IP and generate pinouts for the specific board.


1. Verify that the Presets window is visible. If the Presets window is not visible, display it by selecting View ►

Presets.

2. In the Presets window, select the appropriate development kit preset and click Apply.

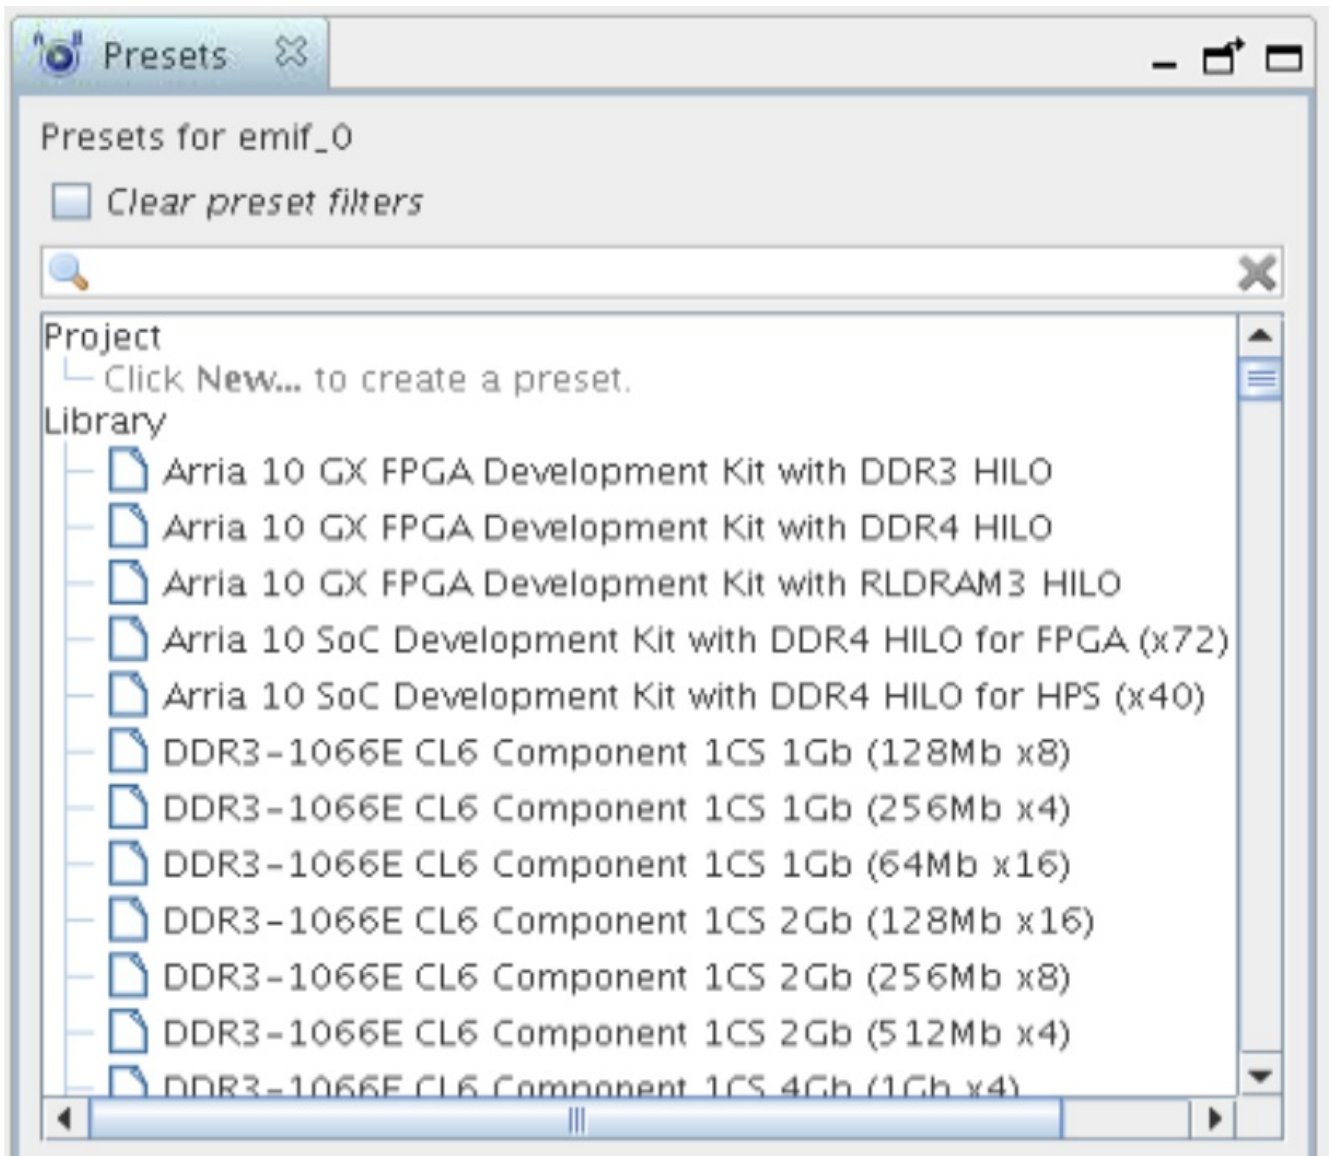


3. Configure the EMIF IP and click Generate Example Design in the upper-right corner of the window.

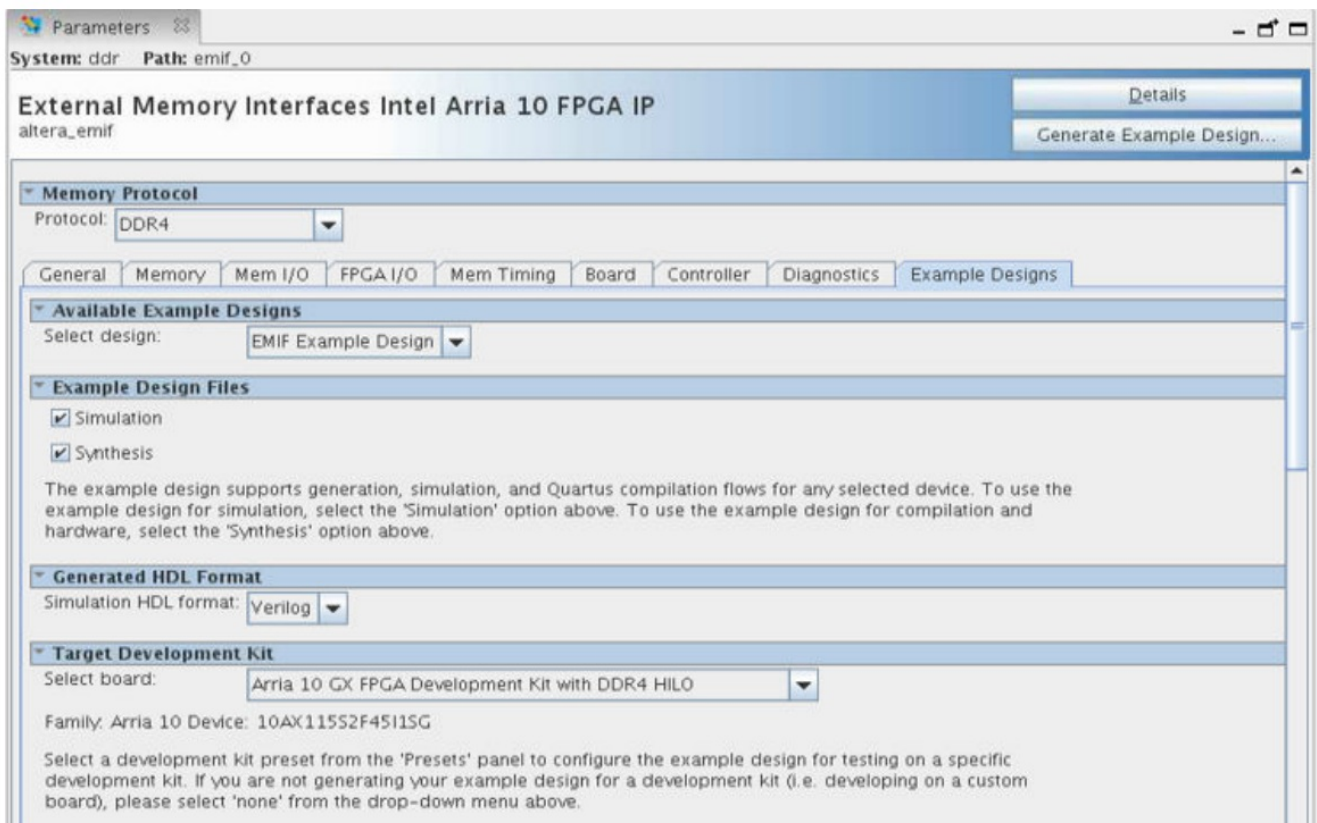

4. Specify a directory for the EMIF design example and click OK. Successful generation of the EMIF design example creates the following files under a Wii directory.

Figure 3. Generated Synthesizable Design Example File Structure

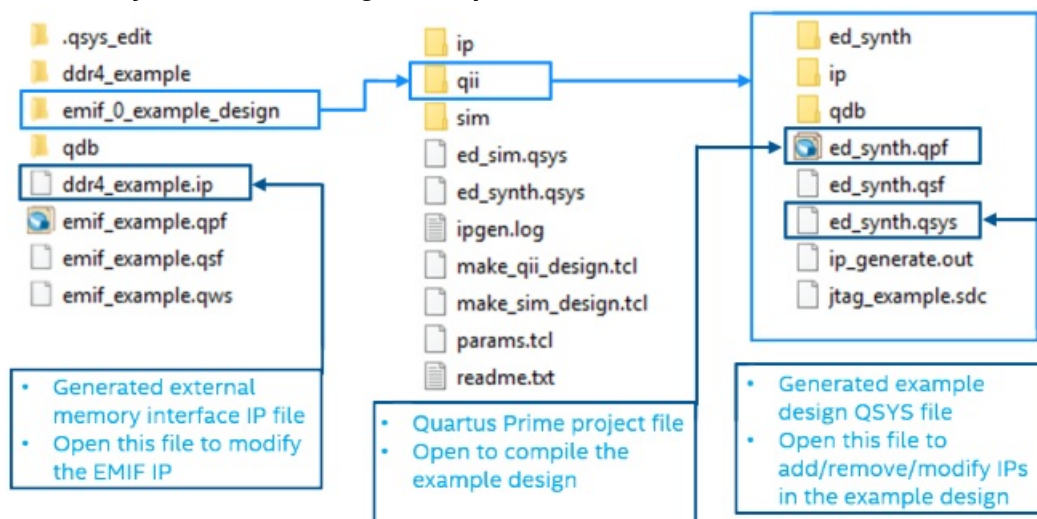

Note: If you don't select the Simulation or Synthesis checkbox, the destination directory will contain Platform Designer design files, which are not compilable by the Intel Quartus Prime software directly, but can be viewed or edited under the Platform Designer. In this situation, you can run the following commands to generate synthesis and simulation file sets.

- To create a compilable project, you must run the `quartus_sh -t make_qii_design.tcl` script in the destination directory.
- To create a simulation project, you must run the `quartus_sh -t make_sim_design.tcl` script in the destination directory.
- The Select board pulldown in this section applies the appropriate development kit pin assignments to the example design.

- This setting is available only when you turn on the Synthesis checkbox in the Example Design Files section.
- This setting must match the applied development kit present, or else an error message appears.
- If the value None appears in the Select board pulldown, it indicates that the current parameter selections do not match any development kit configurations. You may apply a development kit-specific IP and related parameter settings by selecting one of the preset from the preset library. When you apply a preset, the current IP and other parameter settings are set to match the selected preset. If you want to save your current settings, you should do so before you select a preset. If you do select a preset without saving your prior settings, you can always save the new preset settings under a different name
- If you want to generate the example design for use on your own board, set Select board to None, generate the example design, and then add pin location constraints.


Related Information

- Synthesis Example Design on page 17
- Intel Arria 10 EMIF IP Parameter Descriptions for DDR3
- Intel Arria 10 EMIF IP Parameter Descriptions for DDR4
- Intel Arria 10 EMIF IP Parameter Descriptions for QDRII/II+/Xtreme
- Intel Arria 10 EMIF IP Parameter Descriptions for QDR-IV
- Intel Arria 10 EMIF IP Parameter Descriptions for RLDRAM 3
- Intel Arria 10 EMIF IP Parameter Descriptions for LPDDR3


Generating the EMIF Design Example for Simulation

For the Intel Arria 10 development kits, there are presets that automatically parameterize the EMIF IP and generate pinouts for the specific board.

1. Verify that the Presets window is visible. If the Presets window is not visible, display it by selecting View ► Presets.
2. In the Presets window, select the appropriate development kit preset and click Apply.

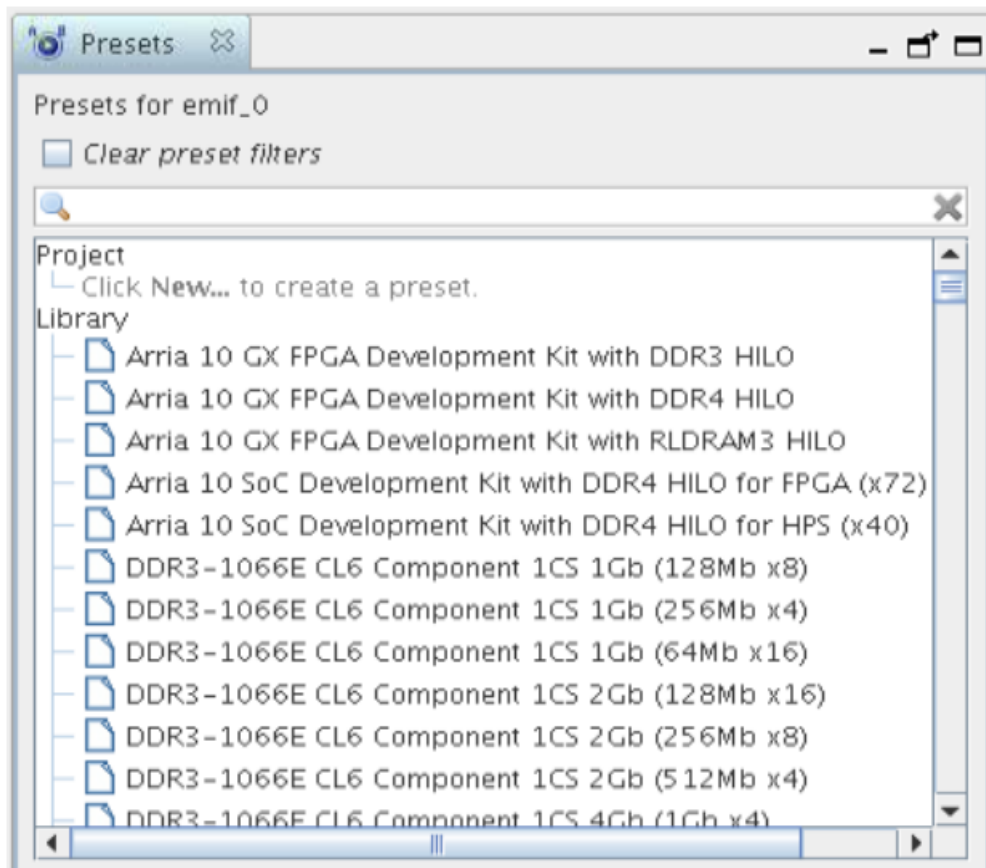


3. Configure the EMIF IP and click Generate Example Design in the upper-right corner of the window.

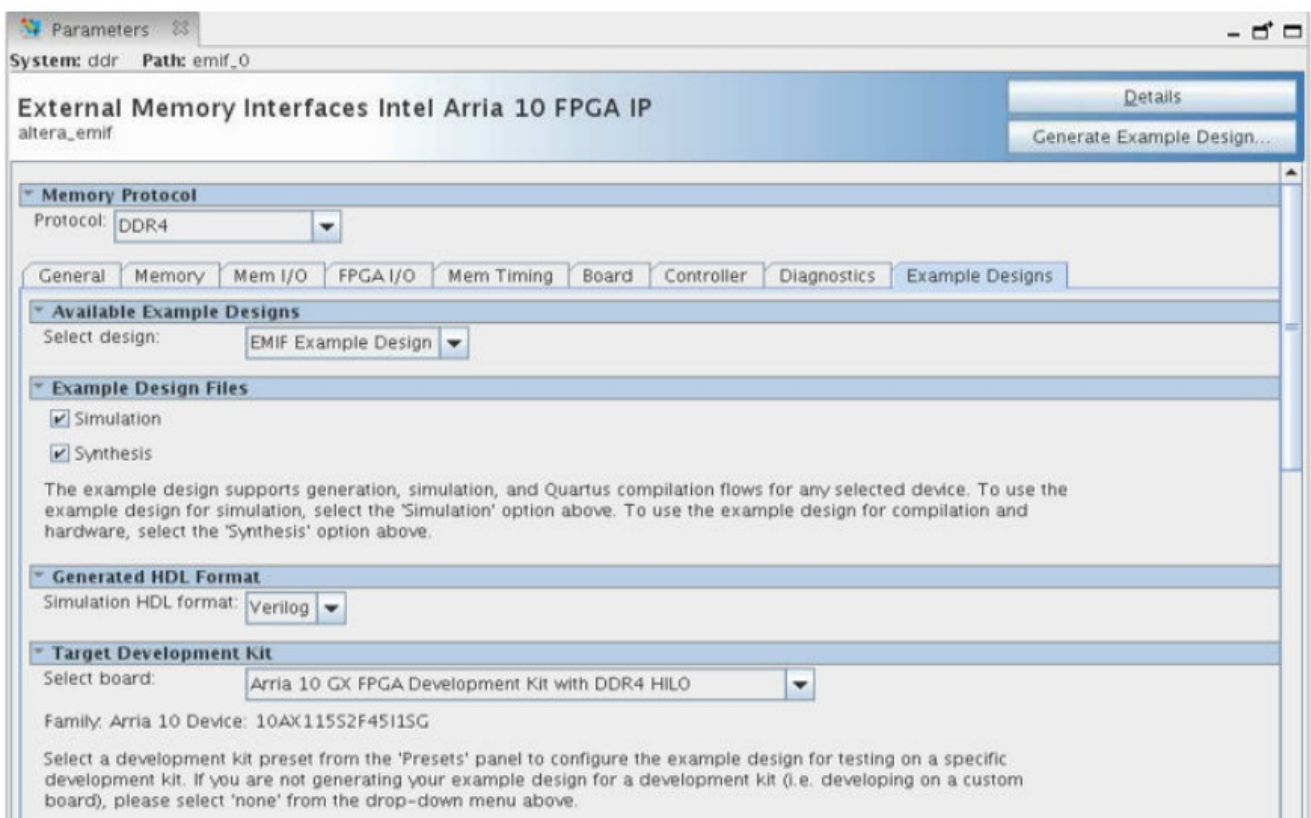

4. Specify a directory for the EMIF design example and click OK.

Successful generation of the EMIF design example creates multiple file sets for various supported simulators, under a sim/ed_sim directory.

Figure 4. Generated Simulation Design Example File Structure

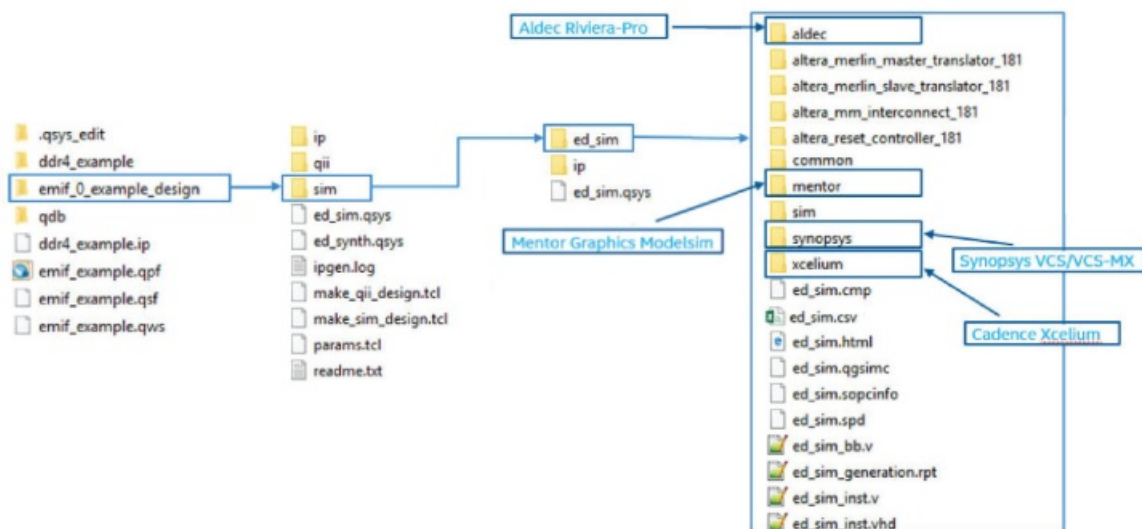

Note: If you don't select the Simulation or Synthesis checkbox, the destination directory will contain Platform Designer design files, which are not compilable by the Intel Quartus Prime software directly, but can be viewed or edited under the Platform Designer. In this situation you can run the following commands to generate synthesis and simulation file sets.

- To create a compilable project, you must run the `quartus_sh -t make_qii_design.tcl` script in the destination directory.
- To create a simulation project, you must run the `quartus_sh -t make_sim_design.tcl` script in the destination directory.

Related Information

- Simulation Example Design on page 19
- Intel Arria 10 EMIF IP – Simulating Memory IP

Simulation Versus Hardware Implementation

For external memory interface simulation, you can select either skip calibration or full calibration on the Diagnostics tab during IP generation.

EMIF Simulation Models

This table compares the characteristics of the skip calibration and full calibration models.

Table 2. EMIF Simulation Models: Skip Calibration versus Full Calibration

Skip Calibration	Full Calibration
System-level simulation focusing on user logic.	Memory interface simulation focusing on calibration.
Details of calibration are not captured.	Captures all stages of calibration.
<i>continued...</i>	

Skip Calibration	Full Calibration
Has ability to store and retrieve data.	Includes leveling, per-bit deskew, etc.
Represents accurate efficiency.	
Does not consider board skew.	

RTL Simulation Versus Hardware Implementation

This table highlights key differences between EMIF simulation and hardware implementation.

Table 3. EMIF RTL Simulation Versus Hardware Implementation

RTL Simulation	Hardware Implementation
Nios® initialization and calibration code execute in parallel.	Nios initialization and calibration code execute sequentially.
Interfaces assert cal_done signal simultaneously in simulation.	Fitter operations determine the order of calibration, and interfaces do not assert cal_done simultaneously.

You should run RTL simulations based on traffic patterns for your design's application. Note that RTL simulation does not model PCB trace delays which may cause a discrepancy in latency between RTL simulation and hardware implementation.

Simulating External Memory Interface IP With ModelSim

This procedure shows how to simulate the EMIF design example.

1. Launch the Mentor Graphics* ModelSim software and select File ► Change Directory. Navigate to the sim/ed_sim/mentor directory within the generated design example folder.
2. Verify that the Transcript window is displayed at the bottom of the screen. If the Transcript window is not visible, display it by clicking View ► Transcript.
3. In the Transcript window, run source msim_setup.tcl.

4. After source msim_setup.tcl finishes running, run ld_debug in the Transcript window.
5. After ld_debug finishes running, verify that the Objects window is displayed. If the Objects window is not visible, display it by clicking View ► Objects.
6. In the Objects window, select the signals that you want to simulate by right-clicking and selecting Add Wave.
7. After you finish selecting the signals for simulation, execute run -all in the Transcript window. The simulation runs until it is completed.
8. If the simulation is not visible, click View ► Wave.

Related Information

Intel Arria 10 EMIF IP – Simulating Memory IP

Pin Placement for Intel Arria 10 EMIF IP

This topic provides guidelines for pin placement.

Overview

Intel Arria 10 FPGAs have the following structure:

- Each device contains 2 I/O columns.
- Each I/O column contains up to 8 I/O banks.
- Each I/O bank contains 4 lanes.
- Each lane contains 12 general-purpose I/O (GPIO) pins.

General Pin Guidelines

The following points provide general pin guidelines:

- Ensure that the pins for a given external memory interface reside within a single I/O column.
- Interfaces that span multiple banks must meet the following requirements:
 - The banks must be adjacent to one another. For information on adjacent banks, refer to the Intel Arria 10 External Memory Interfaces IP User Guide.
 - The address and command bank must reside in a center bank to minimize latency. If the memory interface uses an even number of banks, the address and command bank may reside in either of the two center banks.
- Unused pins can be used as general-purpose I/O pins.
- All address and command and associated pins must reside within a single bank.
- Address and command and data pins can share a bank under the following conditions:
 - Address and command and data pins cannot share an I/O lane.
 - Only an unused I/O lane in the address and command bank can be used for data pins.

Table 4. General Pin Constraints

Signal Type	Constraint
Data Strobe	All signals belonging to a DQ group must reside in the same I/O lane.
Data	Related DQ pins must reside in the same I/O lane. DM/DBI pins must be paired off with a DQ pin for proper operation. For protocols that do not support bidirectional data lines, read signals should be grouped separately from write signals.
Address and Command	Address and Command pins must reside in predefined locations within an I/O bank.

Pin Assignments

If you applied a development kit preset during IP generation, all pin assignments for the development kit are automatically generated and can be verified in the .qsf file that is generated with the design example.

Related Information

- Intel Arria 10 EMIF IP DDR3
- Intel Arria 10 EMIF IP for DDR4
- Intel Arria 10 EMIF IP for QDRII/II+/Xtreme
- Intel Arria 10 EMIF IP for QDR-IV
- Intel Arria 10 EMIF IP for RLDRAM 3
- Intel Arria 10 EMIF IP for LPDDR3

Compiling and Programming the Intel Arria 10 EMIF Design Example

After you have made the necessary pin assignments in the .qsf file, you can compile the design example in the Intel Quartus Prime software.

1. Navigate to the Intel Quartus Prime folder containing the design example directory.
2. Open the Intel Quartus Prime project file, (.qpf).
3. To begin compilation, click Processing ► Start Compilation. The successful completion of compilation generates an .sof file, which enables the design to run on hardware.
4. To program your device with the compiled design, open the programmer by clicking Tools ► Programmer.
5. In the programmer, click Auto Detect to detect supported devices.
6. Select the Intel Arria 10 device and then select Change File.
7. Navigate to the generated ed_synth.sof file and select Open.
8. Click Start to begin programming the Intel Arria 10 device. When the device is successfully programmed, the progress bar at the top-right of the window should indicate 100% (Successful).

Debugging the Intel Arria 10 EMIF Design Example

The EMIF Debug Toolkit is available to assist in debugging external memory interface designs. The toolkit allows you to display read and write margins and generate eye diagrams. After you have programmed the Intel Arria 10 development kit, you can verify its operation using the EMIF Debug Toolkit.

1. To launch the EMIF Debug Toolkit, navigate to Tools ► System Debugging Tools ► External Memory Interface Toolkit.
2. Click Initialize Connections.
3. Click Link Project to device. A window appears; verify that the correct device is selected and that the correct .sof file is selected.
4. Click Create Memory Interface Connection. Accept the default settings by clicking OK.
5. The Intel Arria 10 development kit is now set up to function with the EMIF Debug Toolkit, and you can generate any of the following reports by double-clicking on the corresponding option:
 - Rerun calibration. Produces a calibration report summarizing the calibration status per DQ/DQS group along with the margins for each DQ/DQS pin.
 - Driver Margining. Produces a report summarizing the read and write margins per I/O pin. This differs from calibration margining because driver margining is captured during user mode traffic rather than during calibration
 - Generate Eye Diagram. Generates read and write eye diagrams for each DQ pin based on calibration data patterns.
 - Calibrate Termination. Sweeps different termination values and reports the margins that each termination value provides. Use this feature to help select the optimal termination for the memory interface.

Design Example Description for External Memory Interfaces Intel Arria 10 FPGA IP


When you parameterize and generate your EMIF IP, you can specify that the system create directories for simulation and synthesis file sets, and generate the file sets automatically. If you select Simulation or Synthesis under Example Design Files on the Example Designs tab, the system creates a complete simulation file set or a complete synthesis file set, in accordance with your selection.

Synthesis Example Design

The synthesis example design contains the major blocks shown in the figure below.


- A traffic generator, which is a synthesizable Avalon®-MM example driver that implements a pseudo-random pattern of reads and writes to a parameterized number of addresses. The traffic generator also monitors the data read from the memory to ensure it matches the written data and asserts a failure otherwise.
- An instance of the memory interface, which includes:
 - A memory controller that moderates between the Avalon-MM interface and the AFI interface.
 - The PHY, which serves as an interface between the memory controller and external memory devices to perform read and write operations.

Figure 5. Synthesis Example Design

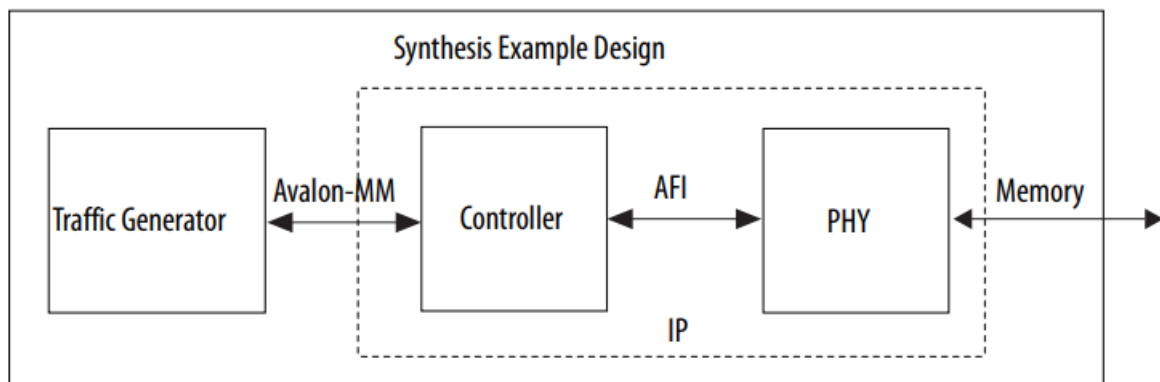


If you are using the Ping Pong PHY feature, the synthesis example design includes two traffic generators issuing commands to two independent memory devices through two independent controllers and a common PHY, as shown in the following figure.

Figure 6. Synthesis Example Design for Ping Pong PHY

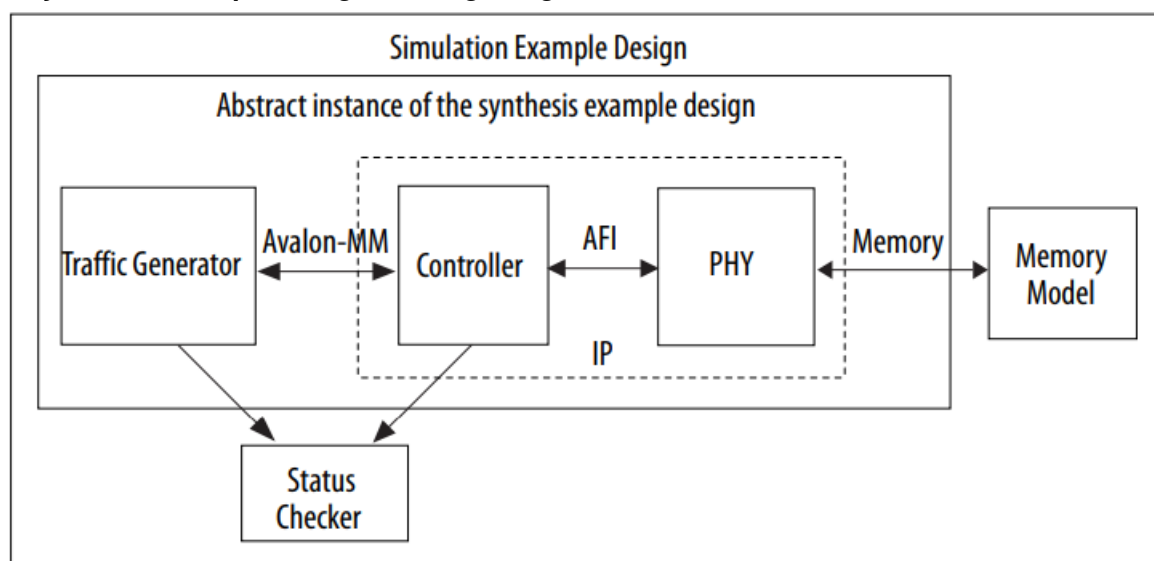

If you are using RLDRAM 3, the traffic generator in the synthesis example design communicates directly with the PHY using AFI, as shown in the following figure.

Figure 7. Synthesis Example Design for RLDRAM 3 Interfaces

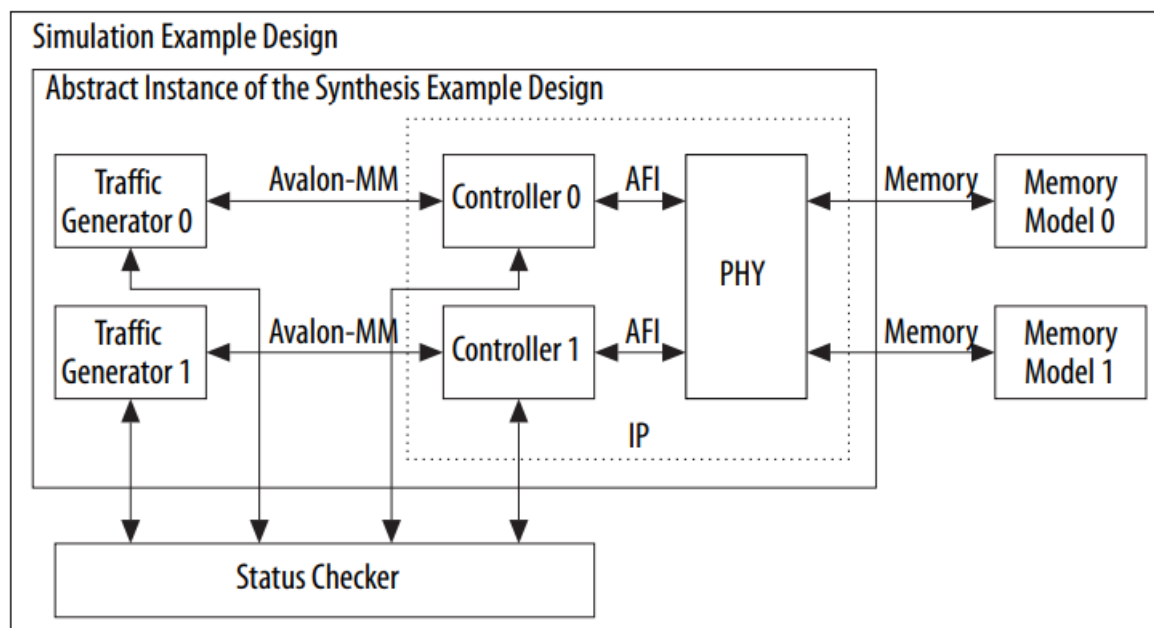

Note: If one or more of the PLL Sharing Mode, DLL Sharing Mode, or OCT Sharing Mode parameters are set to

any value other than No Sharing, the synthesis example design will contain two traffic generator/memory interface instances. The two traffic generator/memory interface instances are related only by shared PLL/DLL/OCT connections as defined by the parameter settings. The traffic generator/memory interface instances demonstrate how you can make such connections in your own designs.

Note: Third-party synthesis flow as described in Intel Quartus Prime Standard Edition User Guide: Third-party Synthesis is not a supported flow for EMIF IP.

Related Information


Generating the Synthesizable EMIF Design Example on page 7

Simulation Example Design

The simulation example design contains the major blocks shown in the following figure.


- An instance of the synthesis example design. As described in the previous section, the synthesis example design contains a traffic generator and an instance of the memory interface. These blocks default to abstract simulation models where appropriate for rapid simulation.
- A memory model, which acts as a generic model that adheres to the memory protocol specifications. Frequently, memory vendors provide simulation models for their specific memory components that you can download from their websites.
- A status checker, which monitors the status signals from the external memory interface IP and the traffic generator, to signal an overall pass or fail condition.

Figure 8. Simulation Example Design

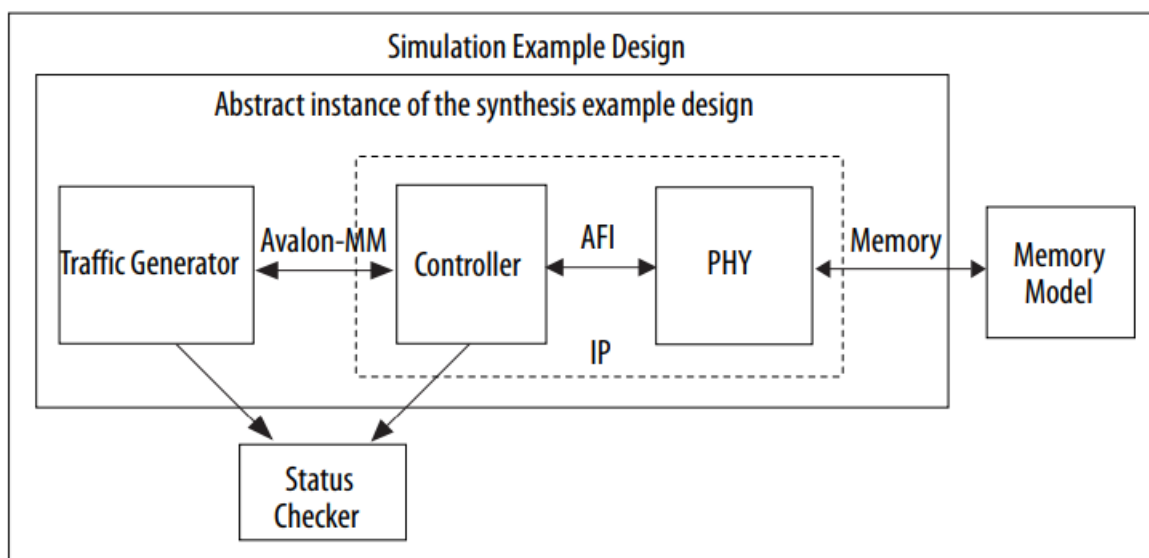


If you are using the Ping Pong PHY feature, the simulation example design includes two traffic generators issuing commands to two independent memory devices through two independent controllers and a common PHY, as shown in the following figure.

Figure 9. Simulation Example Design for Ping Pong PHY

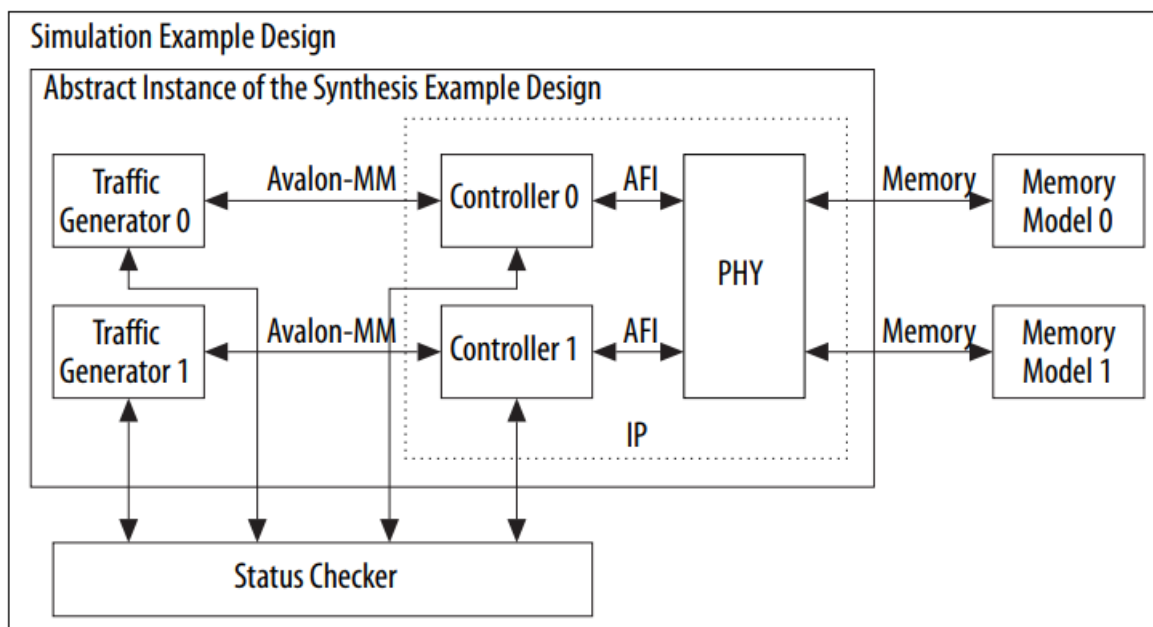

If you are using RLDRAM 3, the traffic generator in the simulation example design communicates directly with the PHY using AFI, as shown in the following figure.

Figure 10. Simulation Example Design for RLDRAM 3 Interfaces

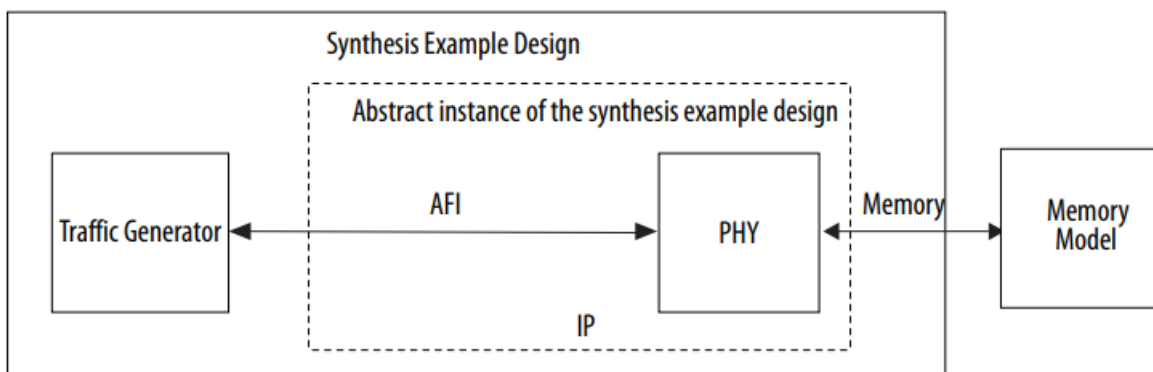


Related Information

Generating the EMIF Design Example for Simulation on page 10

Example Designs Interface Tab

The parameter editor includes an Example Designs tab which allows you to parameterize and generate your example designs.

Figure 11. Example Designs Tab in the External Memory Interfaces Parameter Editor

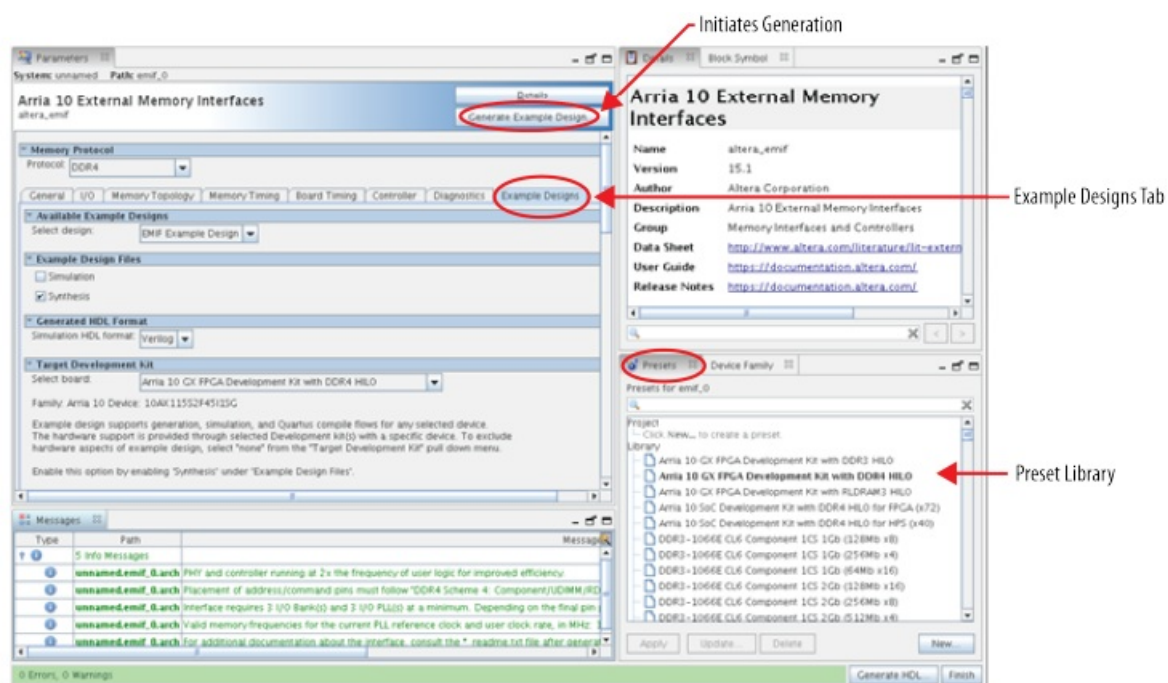

Available Example Designs Section

The Select design pulldown allows you to select the desired example design. At present, EMIF Example Design is the only available choice, and is selected by default.

Document Revision History for External Memory Interfaces Intel Arria 10 FPGA IP Design Example User Guide

Document Version	Intel Quartus Prime Version	Changes
2021.03.29	21.1	<ul style="list-style-type: none"> In the <i>Example Design Quick Start</i> chapter, removed references to the NCSim* simulator.
2018.09.24	18.1	<ul style="list-style-type: none"> Updated figures in the <i>Generating the Synthesizable EMIF Design Example</i> and <i>Generating the EMIF Design Example for Simulation</i> topics.
2018.05.07	18.0	<ul style="list-style-type: none"> Changed document title from <i>Intel Arria 10 External Memory Interfaces IP Design Example User Guide</i> to <i>External Memory Interfaces Intel Arria 10 FPGA IP Design Example User Guide</i>. Corrected bullet points in the <i>Overview</i> section of the <i>Pin Placement for Intel Arria 10 EMIF IP</i> topic.


Date	Version	Changes
November 2017	2017.11.06	Initial release.

Intel Corporation. All rights reserved. Intel, the Intel logo, and other Intel marks are trademarks of Intel Corporation or its subsidiaries. Intel warrants performance of its FPGA and semiconductor products to current specifications in accordance with Intel's standard warranty, but reserves the right to make changes to any products and services at any time without notice. Intel assumes no responsibility or liability arising out of the application or use of any

information, product, or service described herein except as expressly agreed to in writing by Intel. Intel customers are advised to obtain the latest version of device specifications before relying on any published information and before placing orders for products or services.

- Other names and brands may be claimed as the property of others.

Documents / Resources

	intel UG-20118 External Memory Interfaces Arria 10 FPGA IP Design Example [pdf] User Guide UG-20118 External Memory Interfaces Arria 10 FPGA IP Design Example, UG-20118, External Memory Interfaces Arria 10 FPGA IP Design Example, Interfaces Arria 10 FPGA IP Design Example, 10 FPGA IP Design Example
---	--

References

- [intel 1. Design Example Quick Start Guide for External Memory Interfaces...](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Release Information](#)
- [intel 1. Synopsys Synplify* Support](#)
- [intel Intel ISO 9001:2015 Registrations](#)