



[Manuals.plus](#) /

› [WDZP](#) /

› WDZP Backlight Remote Control for Verizon FiOS VZ P265v5 User Manual

WDZP P265v5

WDZP Backlight Remote Control User Manual

Model: P265v5 for Verizon FiOS VZ Systems

INTRODUCTION

This manual provides detailed instructions for setting up, operating, and maintaining your WDZP Backlight Remote Control, model P265v5. This remote is designed as a replacement for Verizon FiOS VZ P265v4 and P265v5 RC TV STB remote controls.

COMPATIBILITY

The WDZP Backlight Remote Control is compatible with Verizon FiOS SD, HD, and DVR boxes, specifically designed for 2-Device, TV STB box, and RC1445302/00B Verizon FiOS remote systems.

Compatibility

VZ P265v5 RC TV STB Remote



Image: The WDZP P265v5 remote control being used with a television, illustrating its compatibility with Verizon FiOS systems.

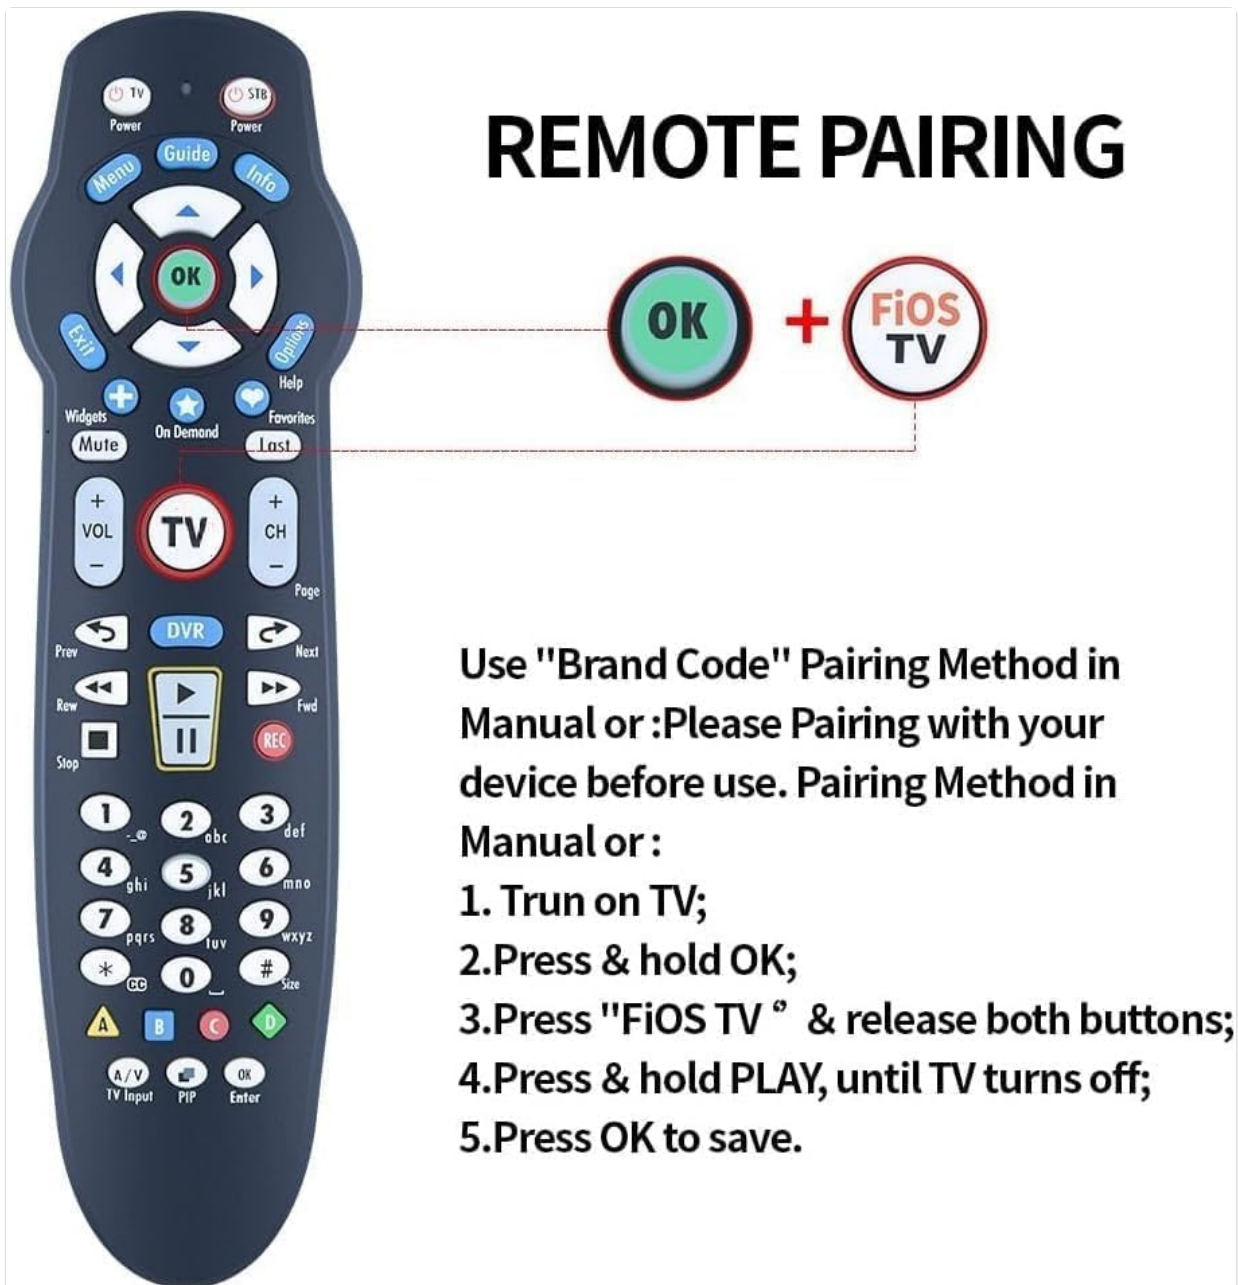


Image: A visual comparison of three remote control models, emphasizing the importance of matching your specific model and button layout for correct functionality.

Please ensure your original remote control model matches the P265v5 for optimal performance. Refer to the comparison image above to verify your model.

SETUP INSTRUCTIONS


1. Battery Installation

The remote control requires two 1.5V AAA batteries (not included). To install:

1. Open the battery compartment cover on the back of the remote.
2. Insert two AAA batteries, ensuring correct polarity (+/-).
3. Close the battery compartment cover.

Note: If you need to replace the batteries, wait until the red LED flashes 5 times quickly before replacing them.

New Remote Control --- Unused



1:1

Original Function



Stable

Volume Control



Large

Responsive Button

Image: The remote control shown alongside an 'X' over batteries, indicating that batteries are not included and highlighting the easy setup process.

2. Pairing Methods

The remote control offers multiple pairing methods to connect with your TV and STB box.

Method 1: Using the FiOS TV Button

1. Turn on your TV.
2. Press and hold the **OK** button.
3. While holding **OK**, press the **FiOS TV** button and then release both buttons.
4. Press and hold the **PLAY** button until your TV turns off.
5. Press **OK** to save the settings.

Advanced Remote Control



Image: Visual guide for pairing the remote control, highlighting the 'OK' and 'FiOS TV' buttons and outlining the steps for initial setup.

Method 2: Using a 3-Digit TV Code

1. Turn on your TV and Frontier STB. Ensure live TV is visible.
2. Locate the 3-digit code for your TV brand (refer to the code list provided with your original equipment or online resources).
3. Press and hold the **OK** and **0** keys together. The red LED on the remote will blink twice, then stay on.
4. Enter the 3-digit TV code using the number pad. The red LED will blink twice and stay on.
5. Press and release **CH+** repeatedly until the TV turns off. You can also press **CH-** to go back.
6. Test the remote to ensure all keys function correctly. If successful, press **OK** to save. The red LED will blink 3 times and turn off.

3. Code Search Method

This method is useful if you cannot find your TV's 3-digit code.

1. Turn on your TV and the Frontier STB. Ensure live television is visible.
2. Press **OK** and **FiOS TV** together, then release both. The red LED will blink twice and then stay on.
3. Press down the **PLAY/PAUSE** button.
4. The remote will attempt a new TV code every second, and the red LED will blink with each code sent.

5. When the TV turns off, immediately stop pressing **PLAY/PAUSE**.
6. You can press **CH+** or **CH-** to cycle forward or backward through TV codes one at a time.
7. Test the remote to confirm it is programmed. If all keys work, press **OK** to save. The red LED will blink 3 times and then turn off.

OPERATING INSTRUCTIONS

Once paired, your WDZP remote control functions similarly to your original Verizon FiOS remote. It features a backlight for improved visibility in low-light conditions.

- **Power Button:** Turns your TV and STB box on or off.
- **Channel Buttons (CH+/CH-):** Changes channels.
- **Volume Buttons (VOL+/VOL-):** Adjusts the volume.
- **Navigation Pad (Arrows & OK):** Navigates menus and confirms selections.
- **Menu/Guide/Info:** Accesses TV menus, program guides, and information.
- **DVR Controls:** Play, Pause, Stop, Rewind, Fast Forward, Record.
- **Backlight Feature:** The buttons illuminate for easy use in dark environments.



Image: The WDZP P265v5 remote control being held and used, demonstrating its ergonomic design and backlit buttons for enhanced usability.

MAINTENANCE

To ensure the longevity and optimal performance of your remote control:

- Keep the remote clean by wiping it with a soft, dry cloth.
- Avoid exposing the remote to extreme temperatures, humidity, or direct sunlight.
- Replace batteries promptly when the remote's performance degrades or the low battery indicator (if present) activates.
- Do not mix old and new batteries, or different types of batteries.

TROUBLESHOOTING


- **Remote not responding:**
 - Check battery installation and replace if necessary.
 - Ensure there are no obstructions between the remote and the device.
 - Re-attempt the pairing process (Method 1 or 2).
- **Specific buttons not working:**
 - This may indicate an incomplete pairing. Try the pairing or code search method again.
 - Ensure the remote is pointed directly at the device's IR receiver.
- **Backlight not working:**
 - Check battery levels. Low batteries can affect backlight functionality.

SPECIFICATIONS

Brand	WDZP
Model Name	P265v5
Special Feature	Backlit buttons
Color	Black
Max Number of Supported Devices	1 (TV/STB)
Compatible Devices	Television, STB Box (Verizon FiOS)
Connectivity Technology	Infrared
Controller Type	Button Control
Maximum Range	40 Feet
Battery Type	2 x 1.5V AAA Batteries (not included)

Easy Setup • No App • No Stress

(Advanced infrared technology: Strong signal & Long distance)

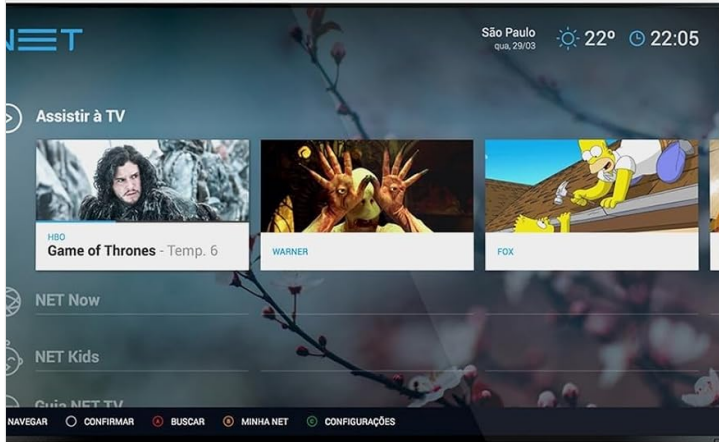

Energy conservation and resource saving
No need to frequently replace batteries
(Batteries NOT Included)



Image: The remote control emphasizing its technical specifications including a 40-foot control distance, 180-degree control angle, and 38kHz+ reaction rate, along with its durable ABS material construction.

WARRANTY AND SUPPORT

This WDZP remote control comes with a 6-month warranty. For any quality issues or if the product does not match your equipment, please contact customer support for a free exchange or refund.

For further assistance, please refer to the contact information provided with your purchase or visit the official WDZP store page.