



INTERMATIC ET8215C Electronic Timer Control Instruction Manual

[Home](#) » [Intermatic](#) » INTERMATIC ET8215C Electronic Timer Control Instruction Manual 



<http://waterheatertimer.org/Intermatic-ET-series-timers-and-manuals.html#ET8000>

Electronic Timer Control – ET8215C

Electronic Timer Control – Astronomic 7-Day 2-Circuit Electronic Control, 120-277 VAC, 2-SPST, Indoor
Metal Enclosure
Item ET8215C

Contents

- [1 PRODUCT DESCRIPTION](#)
- [2 FEATURES](#)
- [3 APPLICATIONS](#)
- [4 TECHNICAL DATA](#)
- [5 DRAWINGS AND DIAGRAMS](#)
- [6 ACCESSORIES](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)



PRODUCT DESCRIPTION

This series offers an easy way to upgrade from a basic mechanical time switch to an electronic time switch. These timers will allow for up-to-the-minute programming, battery backup for power loss, up to 28 events total, and automatic daylight saving time corrections without the need of user interaction. They come in standard 24-hour, 7-day and 7-day astronomic versions.

FEATURES

- Selector switch to determine input voltage between 120-277 VAC
- Up to 28 events total
- To-the-minute accuracy
- Temporary override or permanent manual override
- Automatic Daylight Saving Time adjustment
- Astronomic models enable dusk-to-dawn scheduling

APPLICATIONS


- Outdoor Lighting Control
- Timing/Scheduling ON/OFF
- Machinery & Pump Controls

TECHNICAL DATA

General	
Model Number	ET8215C
Description	Astronomic 7-Day 2-Circuit Electronic Control, 120-277 VAC, 2-SPST, Indoor Metal Enclosure
UPC Code	78275089761
Brand	Intermatic
Country of Origin (Intermatic)	CHINA
Warranty Period	1-Year limited
Control Specifications	
Minimum ON/OFF Times	1 min
Minimum Pulse Time	2 sec
Maximum Pulse Time	2 sec
Maximum ON/OFF Times	Indefinite
Maximum ON/OFF Operations	28
Setpoint Program Count	28
ON/OFF Operations	28
Operation Features	Astronomic
Operation Mode	7 day
Daylight Savings Adjustment	Automatic
Backup Type	Battery
Battery Type	AAA
Battery Service Type	Field Serviceable
Mechanical Specifications	
Enclosure Type	Indoor type 1 metal
Dimensions	
Product Dimensions (H x W x D) in	7.875 x 5.125 x 3.4375 in
Wire Size Min	#14 AWG
Wire Size Max	#8 AWG
Load Ratings	
Magnetic Ballast Range(s)	20 A, 120-277 VAC
Tungsten Range(s)	5 A, 120-240 VAC
Electronic Ballast Load Ratings Ranges	1 A, 120-277 VAC

Resistive Load Ratings Ranges	20 A, 28 VDC; 30 A, 120/240 VAC
Inductive Load Ratings Ranges	30 A, 120/240 VAC
Motor Load Ratings Ranges	1 HP, 120 VAC; 2 HP, 240 VAC
Electrical Specifications	
Voltage Selection Type	Selector Switch
Wiring Option	Terminals
Input Voltage Range(s)	120-277 VAC, 50/60 Hz
Number of Circuits	2
Switch Type	2xSPST, 1xDPST or Pulse
Maximum Power Consumption (W)	6 W
Electronic Series	ET8000 Series
Packaging	
Shipping Weight (lbs)	2.994
Unit Carton Dimensions (H x W x L) in	8.001 x 3.251 x 5.251 in
Environmental Specifications	
Temperature (operation)	-40 °F to 104 °F / (-40 °C to 40 °C)
Standards and Certifications	
CSA Certification	cCSAus
Other Certifications and Compatibilities	Title 20
California Proposition 65	Lead

DRAWINGS AND DIAGRAMS

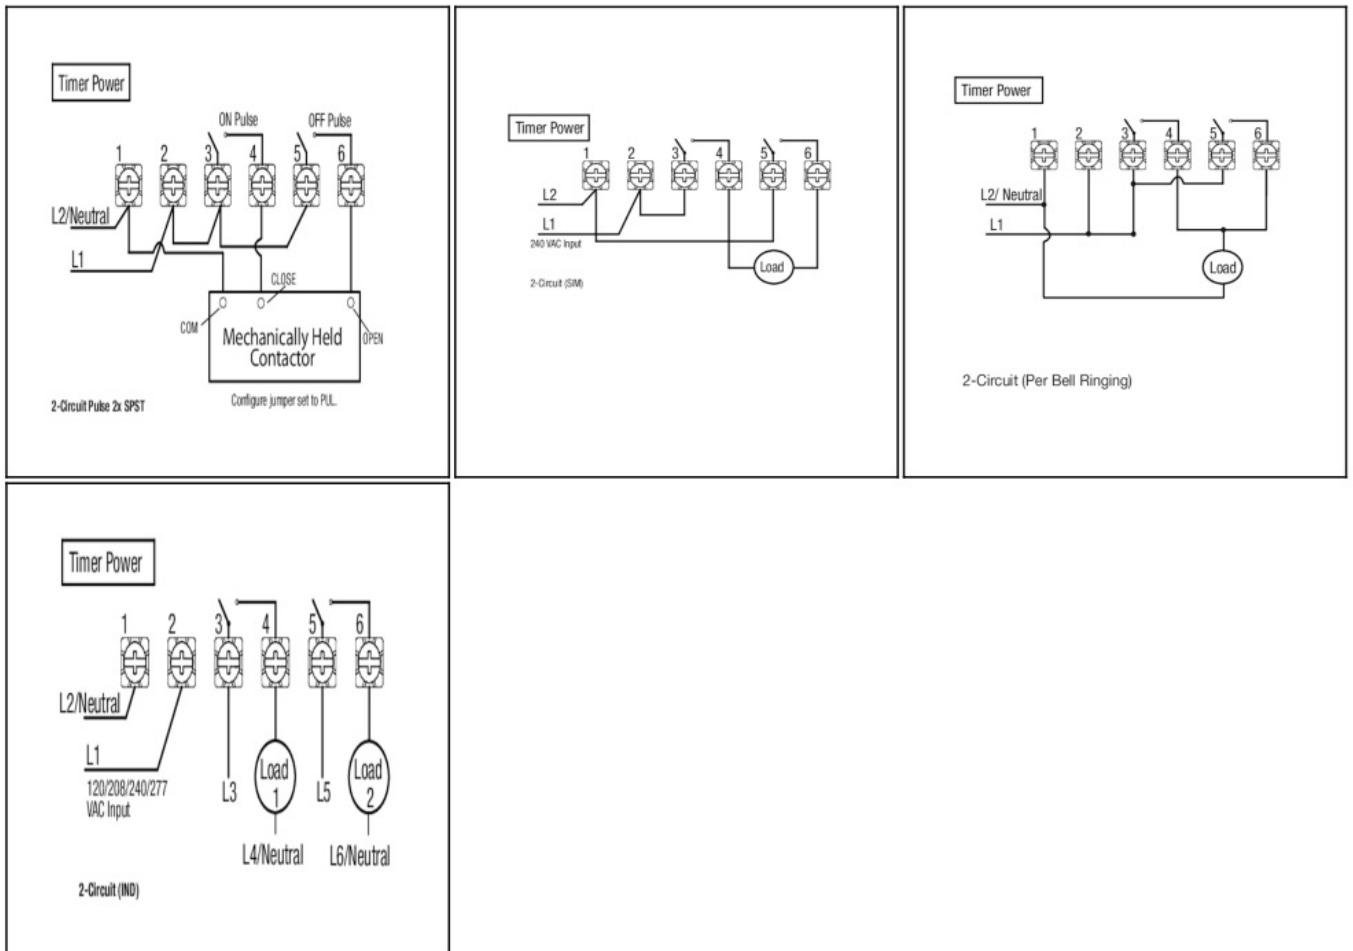

ACCESSORIES

product Image Not Available

124ET2582

(DPST) Insulator for ET Series controls (ET1125C, ET1125CR, ET1725C, ET1725CR, ET8215C and ET8215CR)

Technical specifications and other information are subject to change without notice. Images can vary from original.
© 05/09/2022



Documents / Resources

	<p>INTERMATIC ET8215C Electronic Timer Control [pdf] Instruction Manual ET8215C Electronic Timer Control, ET8215C, Electronic Timer Control, Timer Control</p>
--	---

References

- [Intermatic ET series timers](#)

