

Contents [[hide](#)]

- [1 IPOINT 72309 Multidock 6 Sync](#)
- [2 What's in the box](#)
- [3 Glossary of Terms](#)
- [4 MULTIDOCK 6 AND MULTIDOCK 6 SYNC](#)
- [5 Documents / Resources](#)
 - [5.1 References](#)

IPOINT

IPOINT 72309 Multidock 6 Sync



Thank you for purchasing the IPOINT CONNECT Platform. We hope you enjoy this revolutionary new system and if at any time you need assistance, please contact IPOINT Tech Support via Online chat or through our online help desk.

- IPORT Team

What's in the box



- 1 – IPORT CONNECT Multidock
- 1 – 160W EDAC Power Supply – 19V DC, 8.4A.
- 8 – Mounting Screws 4ea Wood 4ea M4
- 1 – Info Card

Glossary of Terms


- MultiDock – The main mounting station consisting of Charging Docks for IPORT CONNECT iPad or iPhone Cases.
- Charging Cradle – The removable back portion of each
- Charging Dock is interchangeable for different-sized iPhone or iPad devices.
- Charging LED – The LED indicates the current charge status of the iPhone or iPad: red for charging, green for fully charged.

MULTIDOCK 6 AND MULTIDOCK 6 SYNC


1. Remove the Multidock and Power Supply from the box and place them on a table.
2. Insert the DC Power plug into the bottom of the MultiDock and press the cable into the cable retention holders.

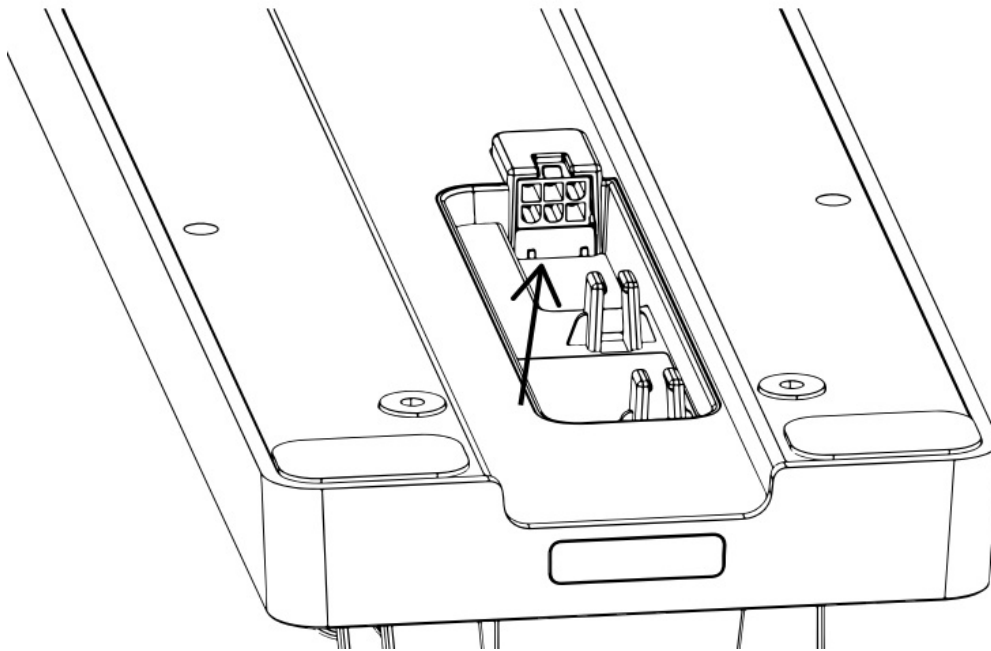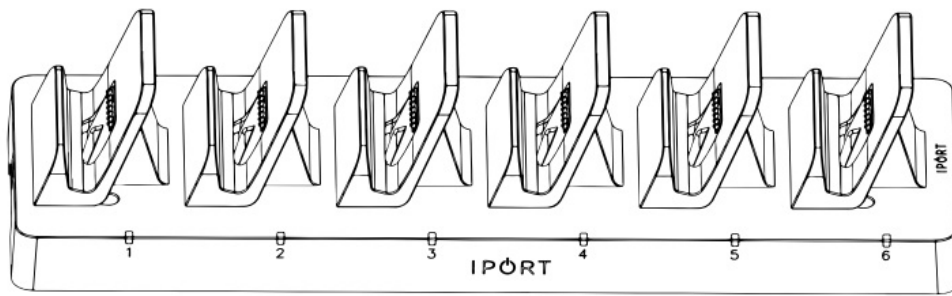


3. Optional for 72300 – MultiDock SYNC 6: To enable syncing, connect one end of a USB-C cable to the USB-C port on the MultiDock and the other end to a computer. This allows syncing of the iPads.

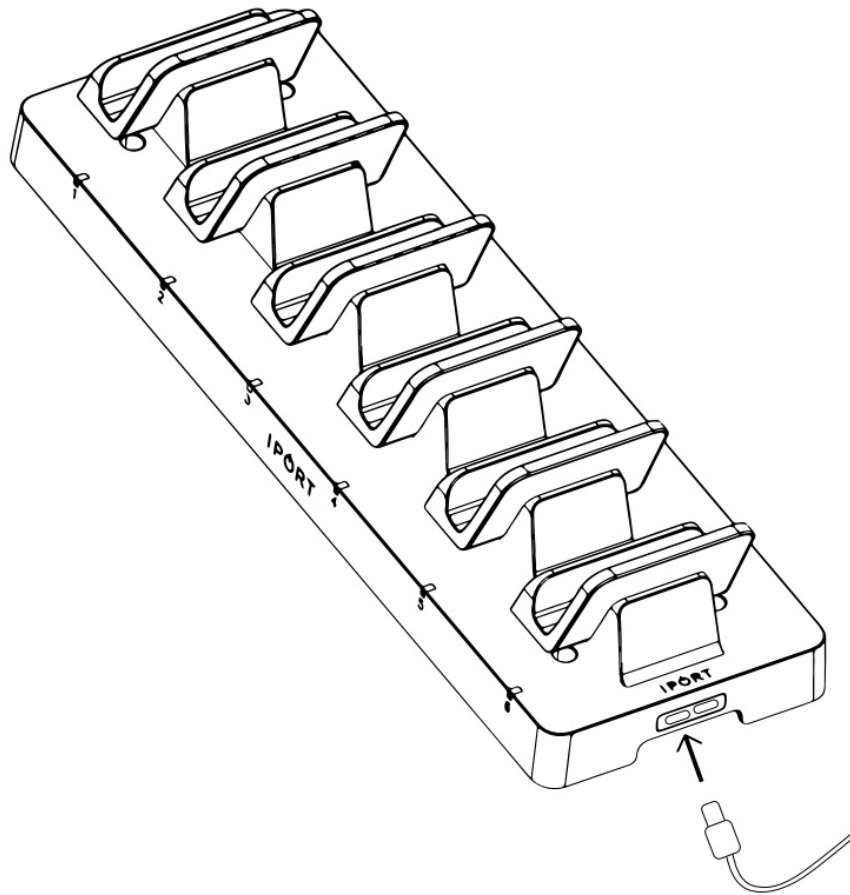


4. Additionally, use the second USB-C Port to plug in a second 72309 to link the two together. You can link up to 3 additional MultiDocks.

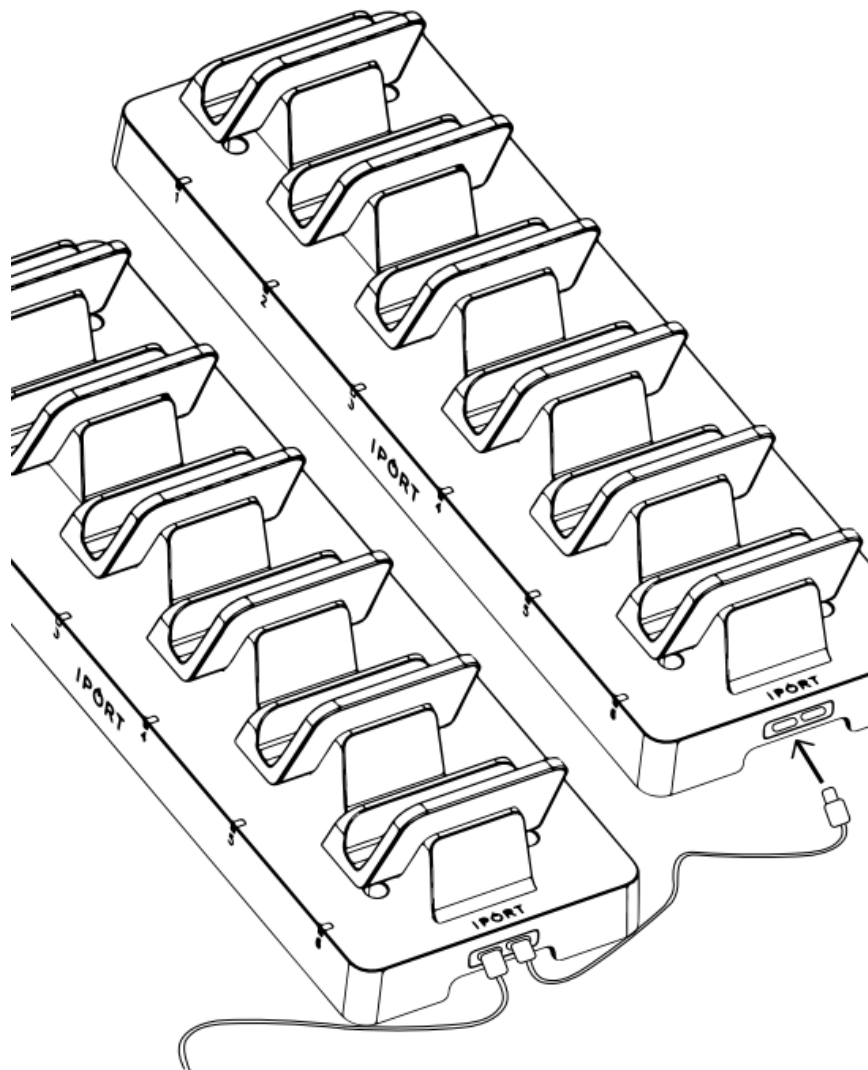



5. Optional – to securely mount MultiDock to a desk or table, remove the first and last charging cradles (see step 6), insert the provided screws through the four openings on the MultiDock and hand tighten with a screwdriver.

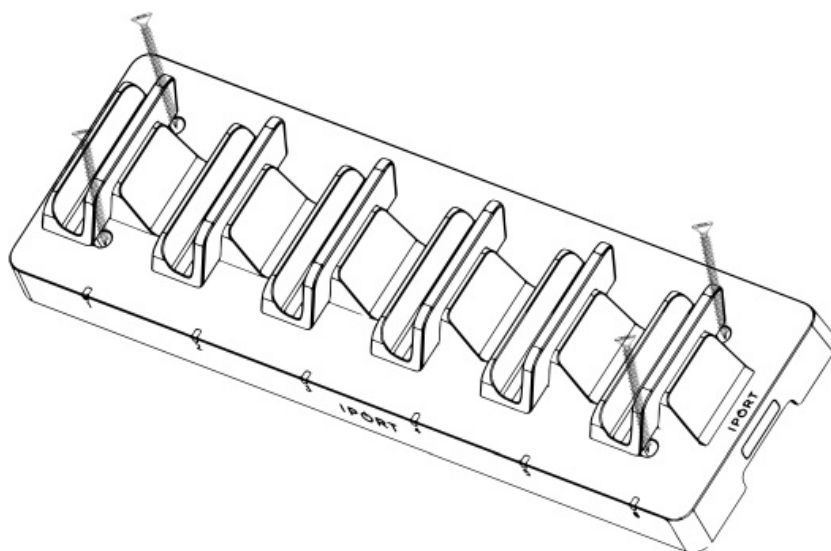


6. Reinstall the charging cradles.

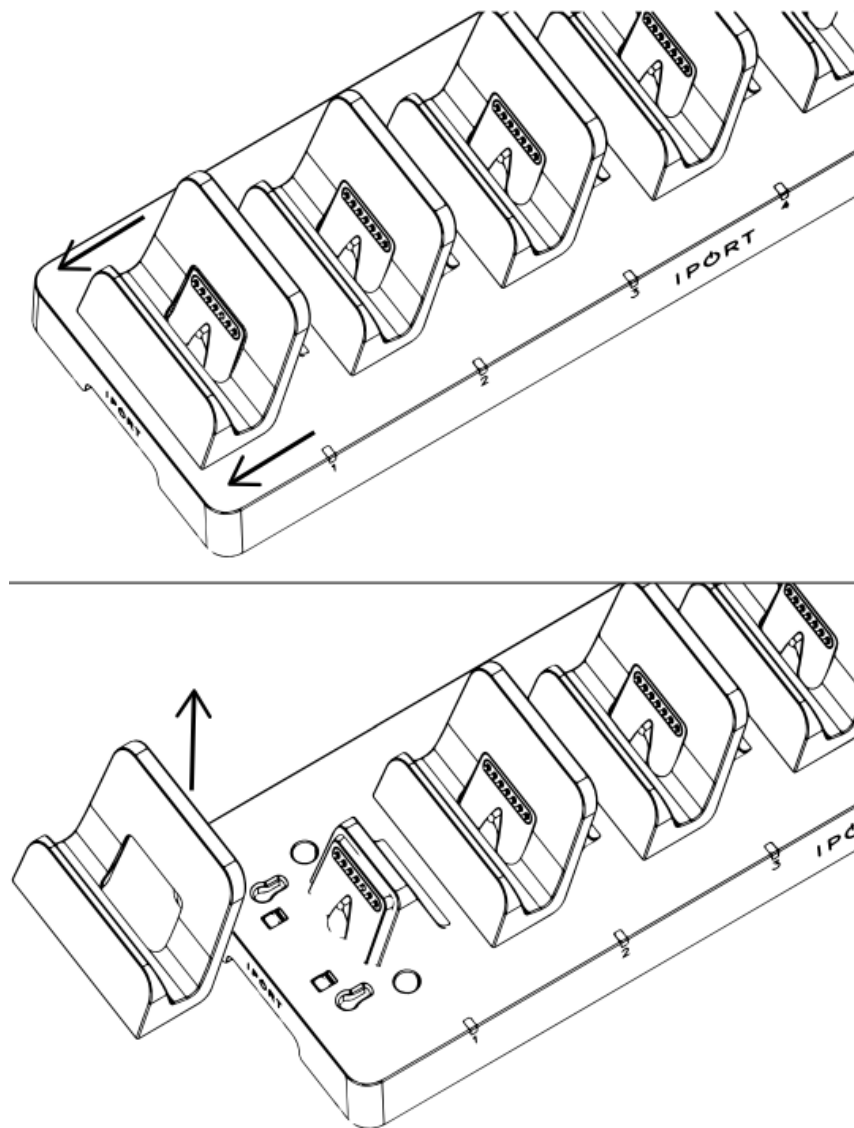

7. To remove or change the charging cradle, slide the cradle towards the front of the Multidock, then pull up.

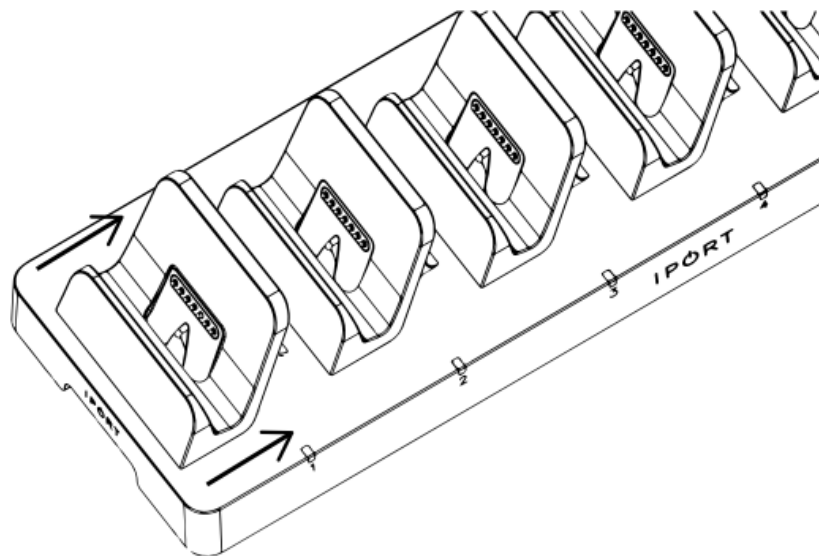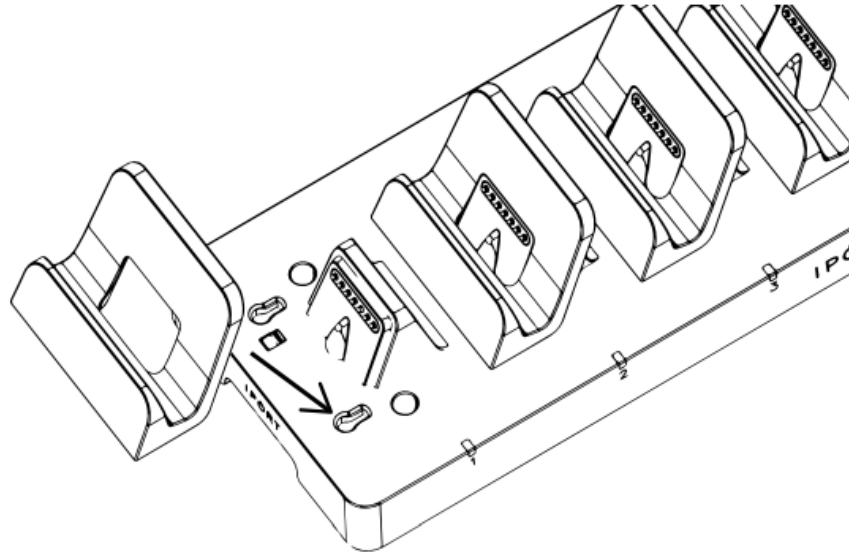


8. To reinstall the charging cradle, place the cradle into the two holes in front of the dock and slide backward until the cradle snaps into place.
9. Place the iPad facing forward into one of the 6 charging cradles. Make sure the cradle's alignment tab engages with the recess on the case to ensure proper alignment.
10. The LED will turn on when the case is properly docked.

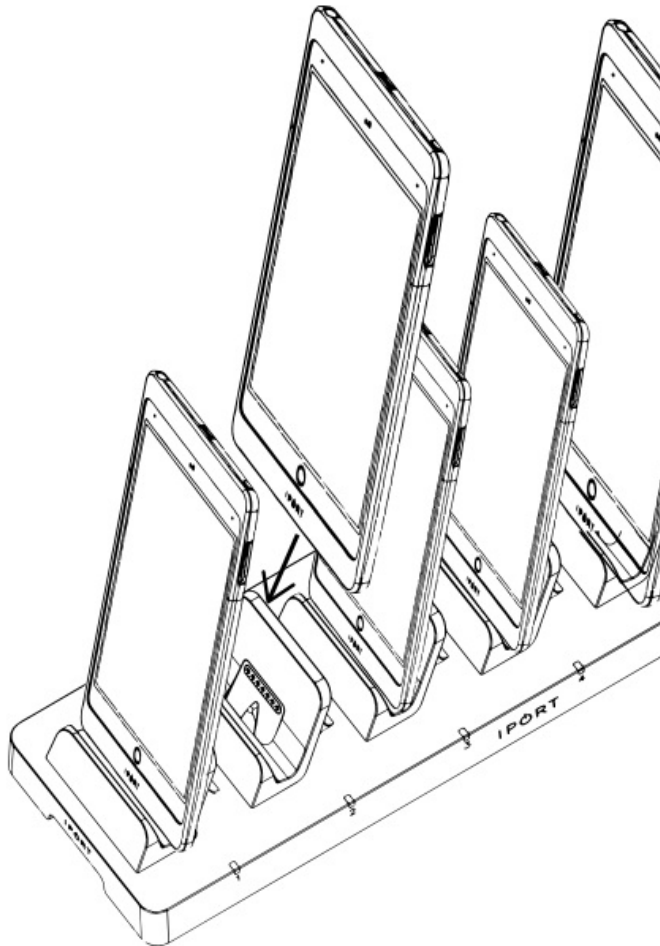

Note: The LEDs may take a few seconds to identify the correct charging status of the iPad. When the iPad is fully charged, the LED will change from red to green.

Documents / Resources

 <p>72308 - CONNECT Multidock 6 72309 - CONNECT Multidock 6 SYNC</p>	<p>I-PORT 72309 Multidock 6 Sync [pdf] Installation Guide</p> <p>72308, 72309, 72309 Multidock 6 Sync, Multidock 6 Sync, 6 Sync</p>
---	---

References

- [User Manual](#)

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

Search:

Search

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.