



ISKM Framed LED Mirror With Front and Backlit User Manual

[Home](#) » [ISKM](#) » ISKM Framed LED Mirror With Front and Backlit User Manual 

ISKM Framed LED Mirror With Front and Backlit



Contents

- [1 Before Installation](#)
- [2 Product Description](#)
- [3 Product Information](#)
- [4 Specifications and Parameters](#)
- [5 Installation Instruction](#)
- [6 Package contents](#)
- [7 You may need these tools](#)
- [8 Meaning of LED Lights](#)
- [9 Troubleshooting](#)
- [10 Customer Support](#)
- [11 Documents / Resources](#)
 - [11.1 References](#)

Before Installation

Thank you so much for choosing our mirrors, in order to facilitate the use of our products, please read this instruction carefully before installation.

Please Notice:

1. Please read all instructions carefully before assembling the item.
2. After opening the package, inspect the product immediately upon receipt for transit damage or missing parts.


3. Please power the mirror with plug to test all its functions before installing on the wall.
4. Assembly by two or more adults is highly recommended. Disconnect power before installing, adding or changing any components.
5. Ensure that the fixing location is able to take the weight of the complete fitting.
6. Keep the voltages 110V. If the voltage exceeds 110V, please use transformer.
7. To connect the wires to electrical junction box, a qualified technician or electrician is highly recommended.

DANGER – To reduce the risk of electric shock:

1. Always disconnect this furnishing from supply main before cleaning or servicing

Product Description

Horizontal/ Vertical Installation

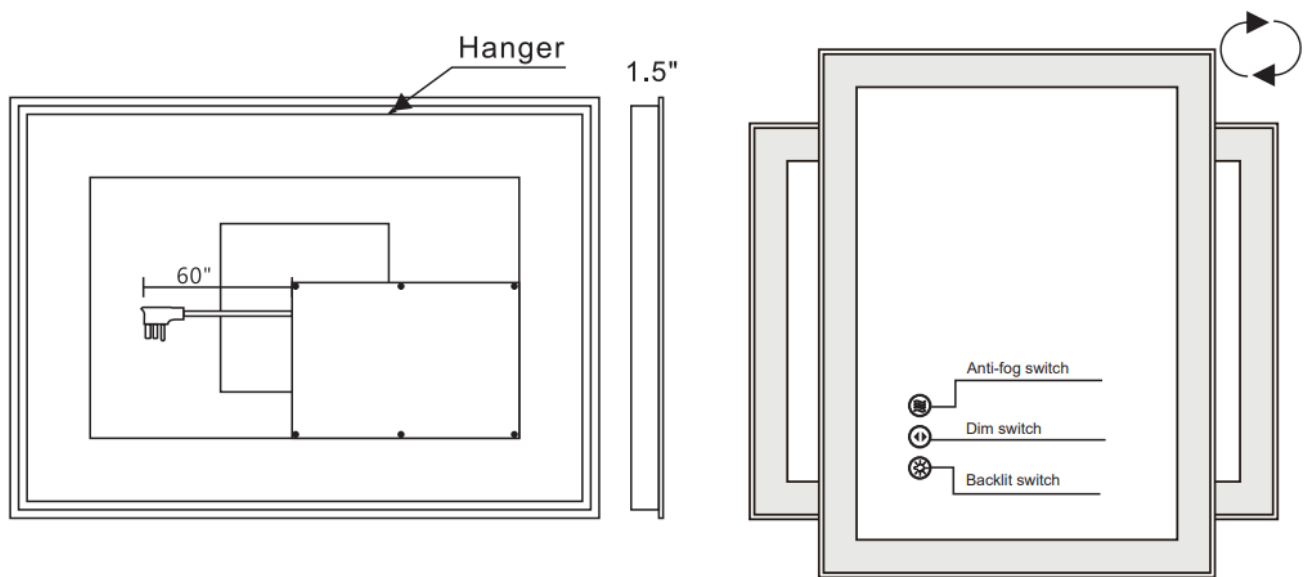

Anti-fog switch: After connecting the power, the anti-fog function is already turn on automatically. If you don't need to use it, just touch it to turn it off, to prevent wasting energy. The defogging will take effect within 10 minutes after it's turned on and close in 1 hour, so you can turn it on 10 minutes before taking a bath.



Dim switch: The led light supports 10% to 100% brightness adjustment, just long press the button. This button has memory function, the next time you open the mirror it will be in the same brightness it was in before it was last closed, which means that you don't have to touch the buttons each time.



Color temperature switch: The front and back lights all have three color temperatures that can be switch(3000K/4000K/6000K), just need to short press this button. And this button has a memory function as well.

Product Information

Anti-fog	Yes
Memory	Yes
Certificate	ETL
Light Source	LED
Cable Length	1.5M
Material	Tempered Glass
Input Voltage	110V~; 50/60Hz
Warranty	3-year manufacturer

Specifications and Parameters


Size	Thick ness	Touc h Bu tt on	LED Stripe M odel	Color Temper ature	Lume n	CRI	Powe r (W)	Input Voltage (V)	Weight (kg)
20"X 28"	1.5"	3	2835 3 colors 192 LED	3000/4000/6000	6780	90	48	110V~,50/60Hz	6.9
24"X 32"	1.5"	3	2835 3 colors 192 LED	3000/4000/6000	8220	90	60	110V~,50/60 Hz	8.8
24"X 36"	1.5"	3	2835 3 colors 192 LED	3000/4000/6000	8943	90	60	110V~,50/60 Hz	9.68
28"X 36"	1.5"	3	2835 3 color s 192 LED	3000/4000/6000	9376	90	60	110V~, 50/60 Hz	11
28"X 60"	1.5"	3	2835 3 colors 192 LED	3000/4000/6000	14250	90	100	110V~,50/60 Hz	16.8
32"X 40"	1.5"	3	2835 3 colors 192 LED	3000/4000/6000	12216	90	75	110V~,50/60 Hz	15.48
32"X 48"	1.5"	3	2835 3 colors 192 LED	3000/4000/6000	13611	90	100	110V~, 50/60 Hz	15.4

32"X 7 2"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	12210	90	150	110V~,50/60 H z	22.5
36" X 3 2"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	11304	90	75	110V~, 50/60H z	12.09
36"X 3 6"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	12216	90	75	110V~, 50/60 Hz	15.48
36"X 4 8"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	14490	90	100	110V~, 50/60H z	17.2
38" X 3 8"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	13093	90	75	110Vov~,50/60 Hz	14.88
40"X 3 0"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	11771	90	75	110V~, 50/60H z	12.63
40" X 3 6"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	12860	90	75	110V~,50/60 H z	14.55
48" X 3 0"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	13326	90	75	110V~, 50/60H z	16.84
48"X40 "	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	15192	90	100	110V~,50/60 H z	21.24
55"X 3 0•	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	14250	90	100	110V~,50/60 H z	19
55" X 3 6"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	15986	90	150	110V~, 50/60H z	22.74
60"X30 "	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	16102	90	150	110V~, 50/60 Hz	19.8 4
60"X36 "	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	16250	90	150	110V~,50/60 H z	26.55
60" X 4 0"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	17525	90	150	110V~,50/60 H z	28.97
72"X 3 6"	1.5"	3	2835 3 colors 192 LED	3000/4000/600 0	18000	90	150	110V~,50/60 H z	31.32

72" X 40"	1.5"	3	2835 3 colors 192 LED	3000/4000/6000	19990	90	150	110V~, 50/60Hz	34.32
84" X 32"	1.5"	3	2835 3 colors 192 LED	3000/4000/6000	22380	90	150	110V~,50/60 Hz	32.9
84" X 40"	1.5"	3	2835 3 colors 192 LED	3000/4000/6000	22424	90	150	110V~, 50/60Hz	41.13
96" X 36"	1,5"	3	2835 3 colors 192 LED	3000/4000/6000	18620	90	150	110V~, 50/60Hz	43
110" X 40"	1.5"	3	2835 3 colors 192 LED	3000/4000/6000	27634	90	150	110V~,50/60Hz	55.12

Installation Instruction


Method 1: Plug in

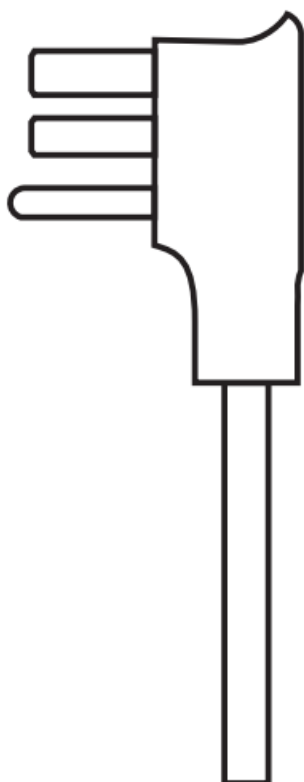

Insert the plug into the socket, keep the voltages between 110V and 120V. If the voltage exceeds 120V, please use transformer.


Method 2: Hardwire

There are three power wires behind the mirror

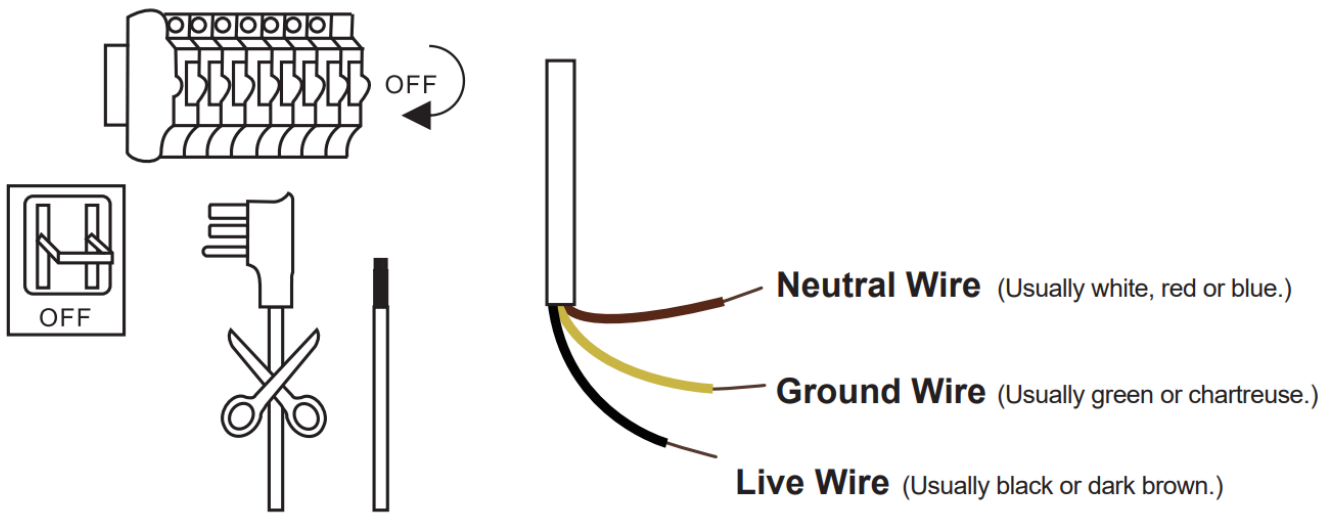


Cut the plug, connect the same color wire and tighten them (Disconnect power before hardwire).

- **Step 1**

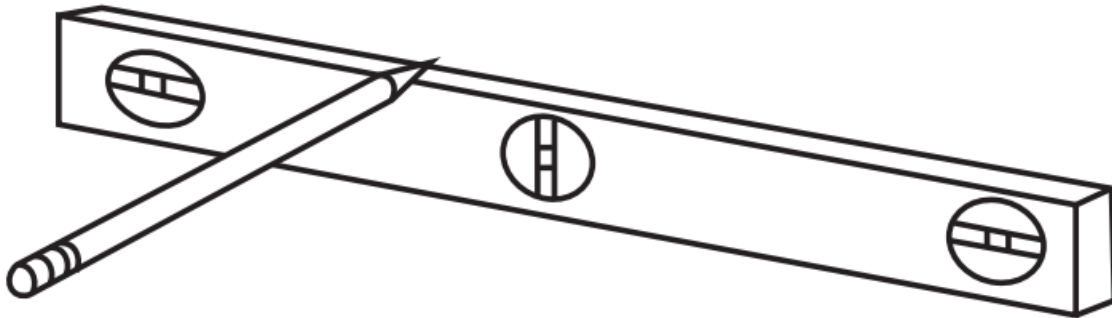


Draw a straight line with a ruler to keep the mirror horizontal

- **Step 2**

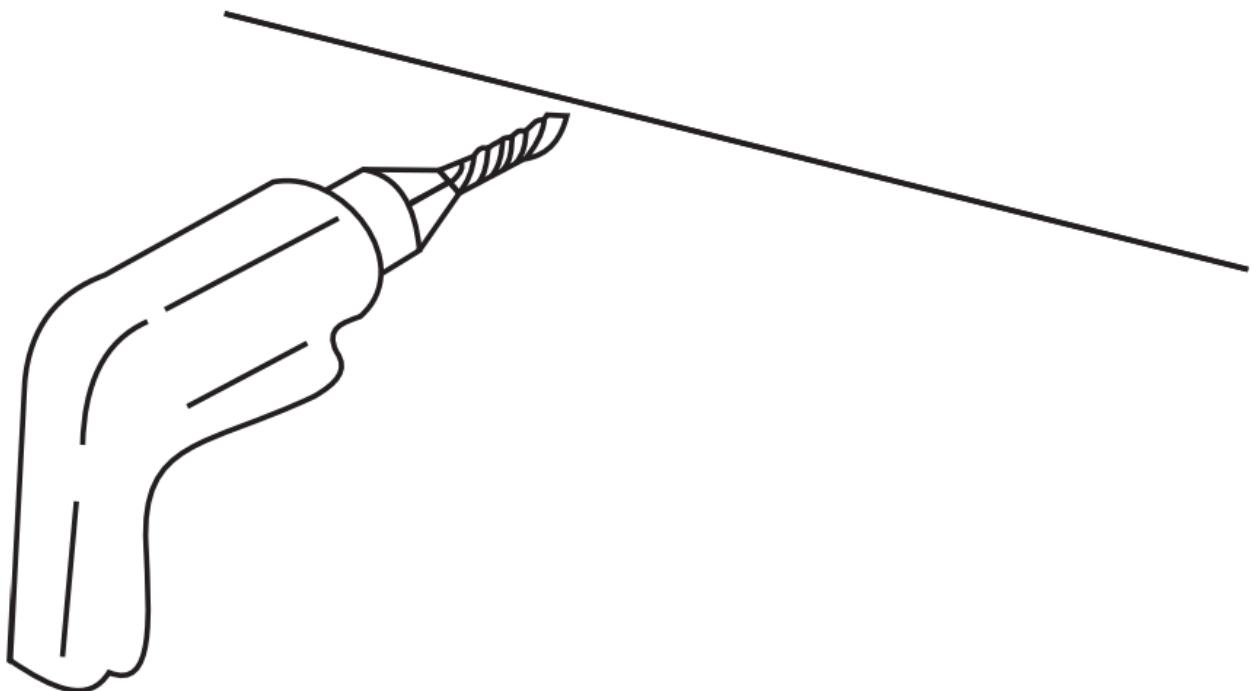


Use a electric drill to punch four holes at the marked spots.

- **Step 3**

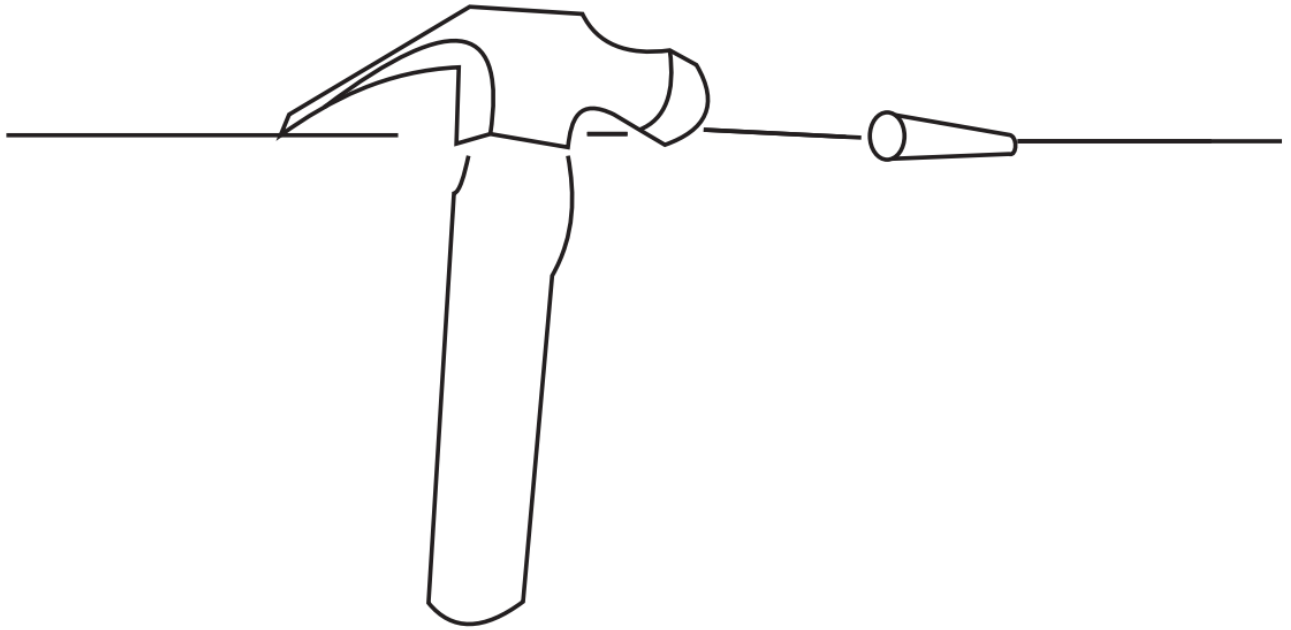


Apply wall anchors with hammer.

- **Step 4**

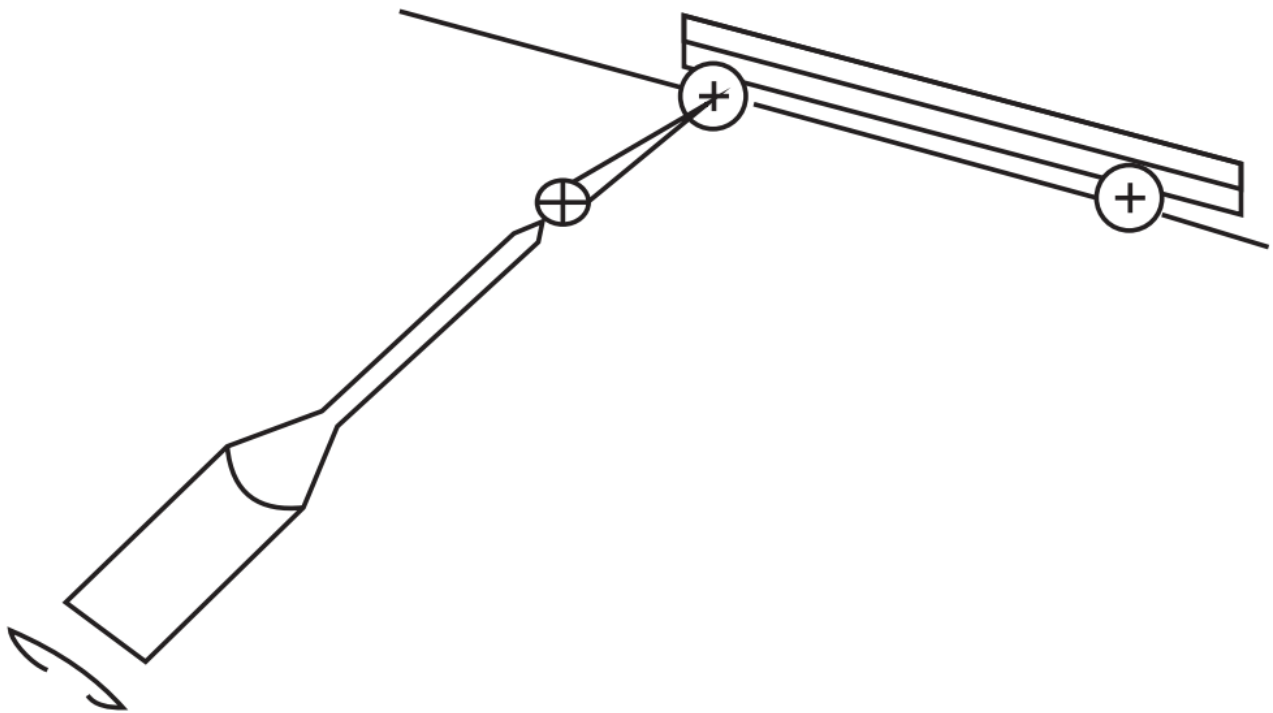



Use a screwdriver to screw the screws into the wall anchors.

- **Step 5**

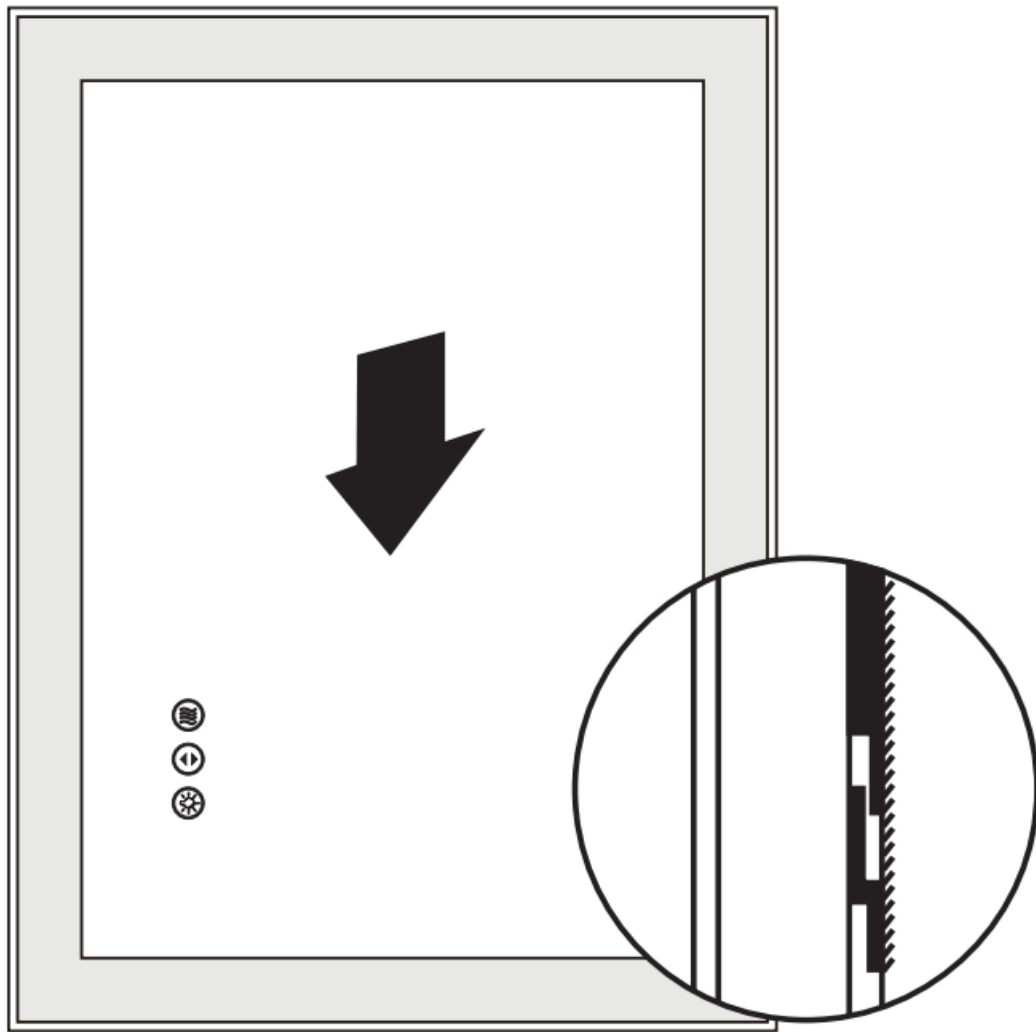

Hang the mirror on the wall

- **Step 6**

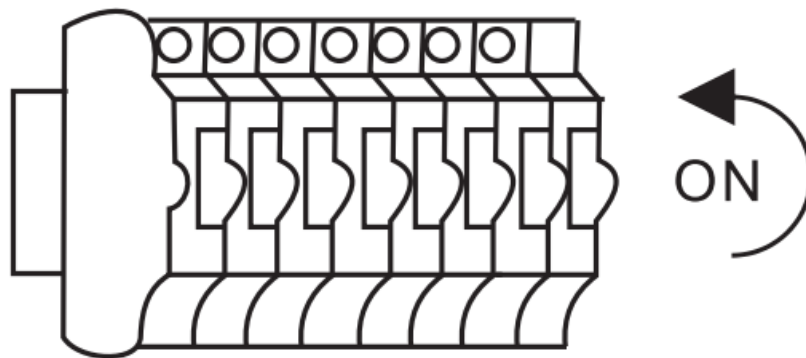


Turn on the power.

Package contents

- Bracket x2




- Wall Anchors x4




- Screws x4



- Plug

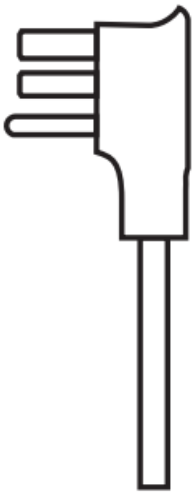

- LED Mirror

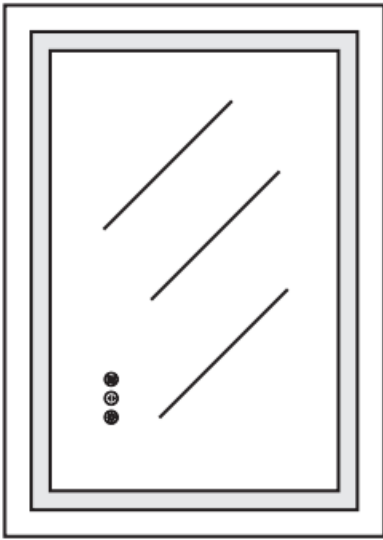

You may need these tools

- Level




- Pencil




- Hammer



- Safety Goggles

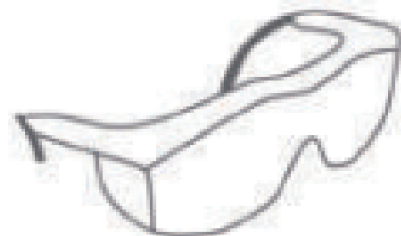

- Electric Drill

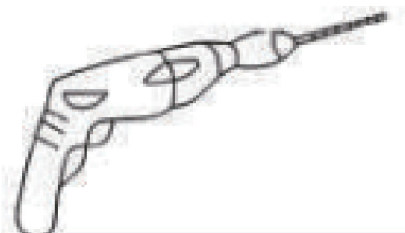


- Screwdriver




- Tape Measure



- SIZE 1

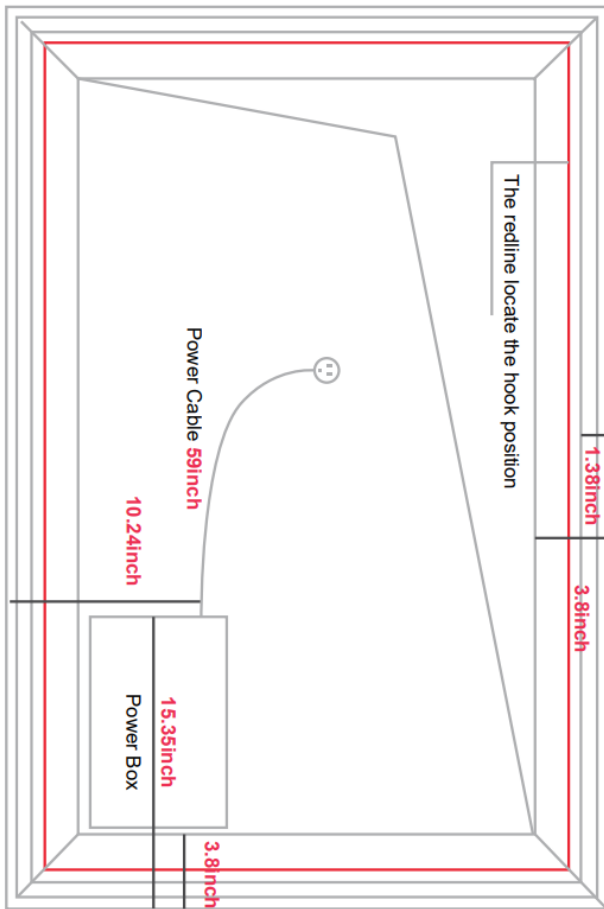

- SIZE 2

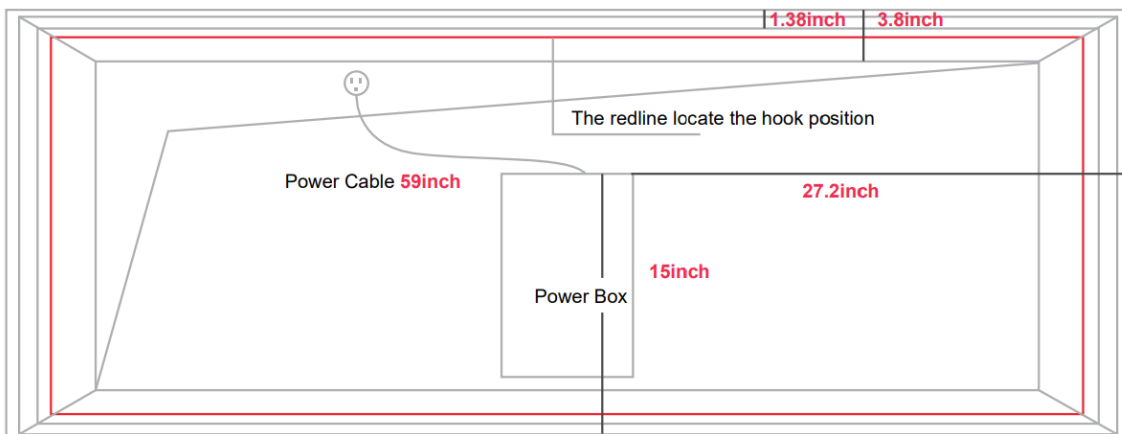

PS: The location of the button is located the power box.

Meaning of LED Lights

State of LED Light	Meaning
White Light ON	Function is Working
Blue Light ON	Function Standby
Light OFF	Power OFF

Troubleshooting

LED doesn't turn on / Defogging doesn't work	Open the power box on the back of the mirror and test the power cables, tighten the cables if they are loose. (Please cut off the power firstly before testing the power supply and cables).
Part of light strip is fault	Firstly, please pull the outer silicone strip away and press the inner light strip inward. If it still doesn't work, need replace the strip light.
After using for a few month, the light doesn't work.	Please contact us to replace the power supply.


Customer Support

Manufacturer: Zhongshan Chengjiang Glass Technology Co., Ltd.
Address: Jichang Village, Dongfeng Town, Zhongshan City, Guangdong Province, China

Contact us: Chengjiang_Glass_Technology@outlook.com



Documents / Resources

	ISKM Framed LED Mirror With Front and Backlit [pdf] User Manual Framed LED Mirror With Front and Backlit, LED Mirror With Front and Backlit, Mirror With Front and Backlit, Front and Backlit, Backlit
---	---

References

- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.