



[Manuals.plus](#) /

› [ERLEJIA](#) /

› ERLEJIA Vanity Desk with Mirror and Lights, 43" Large Makeup Dressing Table Instruction Manual

ERLEJIA SZT-H110-MUDAN2

ERLEJIA Vanity Desk with Mirror and Lights Instruction Manual

Brand: ERLEJIA | Model: SZT-H110-MUDAN2

[Setup](#)

[Operating Instructions](#)

[Maintenance](#)

[Troubleshooting](#)

[Specifications](#)

[Warranty &](#)

[Support](#)

INTRODUCTION

Thank you for choosing the ERLEJIA Vanity Desk with Mirror and Lights. This manual provides essential information for the safe assembly, operation, and maintenance of your new vanity desk. Please read it thoroughly before use and retain it for future reference.



Image: ERLEJIA Vanity Desk. A full view of the black vanity desk, showcasing its large mirror with LED lights, multiple drawers, open shelves, and the overall modern design.

IMPORTANT SAFETY INFORMATION

Caution: Ensure proper assembly and use of the vanity desk to avoid electrical hazards, tipping, or pinch points. Keep away from water. Do not exceed weight limits.

- Always follow assembly instructions carefully.
- Do not overtighten screws during assembly.
- Keep all electrical components away from water or damp environments.
- Ensure the vanity is placed on a stable, level surface.
- Do not allow children to climb on or play with the vanity desk.

- Unplug the power outlet before cleaning or maintenance.

SETUP AND ASSEMBLY

This section guides you through the assembly process of your ERLEJIA Vanity Desk. It is recommended to have at least two people for assembly.

Tools Required:

- Screwdriver (Phillips head recommended)
- Hammer (optional, for dowels)

Package Contents:

Verify all parts are present before beginning assembly. Refer to the included parts list for detailed component identification.

Assembly Steps:

- 1. Step 1: Attach Drawer Slides to Base Panels**

Secure the drawer slides (Ncl, Ncr) to the base panels (Part 2, Part 5) using screws (E). Ensure they are aligned correctly for smooth drawer operation.
- 2. Step 2: Install Cam Locks and Dowels**

Insert cam locks (A) into the designated holes on the base panels (Part 5).
- 3. Step 3: Attach Remaining Drawer Slides**

Attach the remaining drawer slides (Ncr) to panel (Part 3) using screws (E) and cam locks (Ncl).
- 4. Step 4: Secure Cam Locks**

Insert cam locks (A) into panel (Part 3).
- 5. Step 5: Attach Drawer Slides to Panel 4**

Secure drawer slides (Ncl, Ncr) to panel (Part 4) using screws (E) and cam locks (Ncl).
- 6. Step 6: Install Cam Locks in Panel 4**

Insert cam locks (A) into panel (Part 4).
- 7. Step 7: Assemble Side Panels**

Connect panels (Part 7 and Part 8) using dowels (C) and screws (B).
- 8. Step 8: Attach Side Panels to Base**

Attach the assembled side panels (Part 6, Part 7, Part 8) to the base panel (Part 4) using screws (B).
- 9. Step 9: Connect Remaining Side Panels**

Connect panels (Part 2 and Part 3) using screws (B).
- 10. Step 10: Assemble Central Support Structure**

Connect panels (Part 10, Part 11, Part 12) using screws (B) and dowels (C).
- 11. Step 11: Assemble Shelf Units**

Connect panels (Part 13, Part 18, Part 19) using screws (A, B) and dowels (D).
- 12. Step 12: Assemble Remaining Shelf Units**

Connect panels (Part 13, Part 15) using screws (B) and dowels (D).
- 13. Step 13: Assemble Top Panels**

Connect panels (Part 14, Part 17, Part 19) using screws (A, B) and dowels (D).
- 14. Step 14: Assemble Remaining Top Panels**

Connect panels (Part 14, Part 19) using screws (B) and dowels (D).

15. Step 15: Attach Back Panel

Attach the back panel (Part 16) to the main structure using screws (F) and cam locks (J).

16. Step 16: Secure Back Panel to Base


Secure the back panel (Part 1) to the base using screws (G) and dowels (D).

17. Step 17: Connect Side Sections

Connect the side sections (Part 1) using screws (B) and dowels (C).

18. Step 18: Install Power Outlet and Hair Dryer Holder

Install the power outlet (O) and hair dryer holder (I) using screws (H, R) and the provided hardware (M).

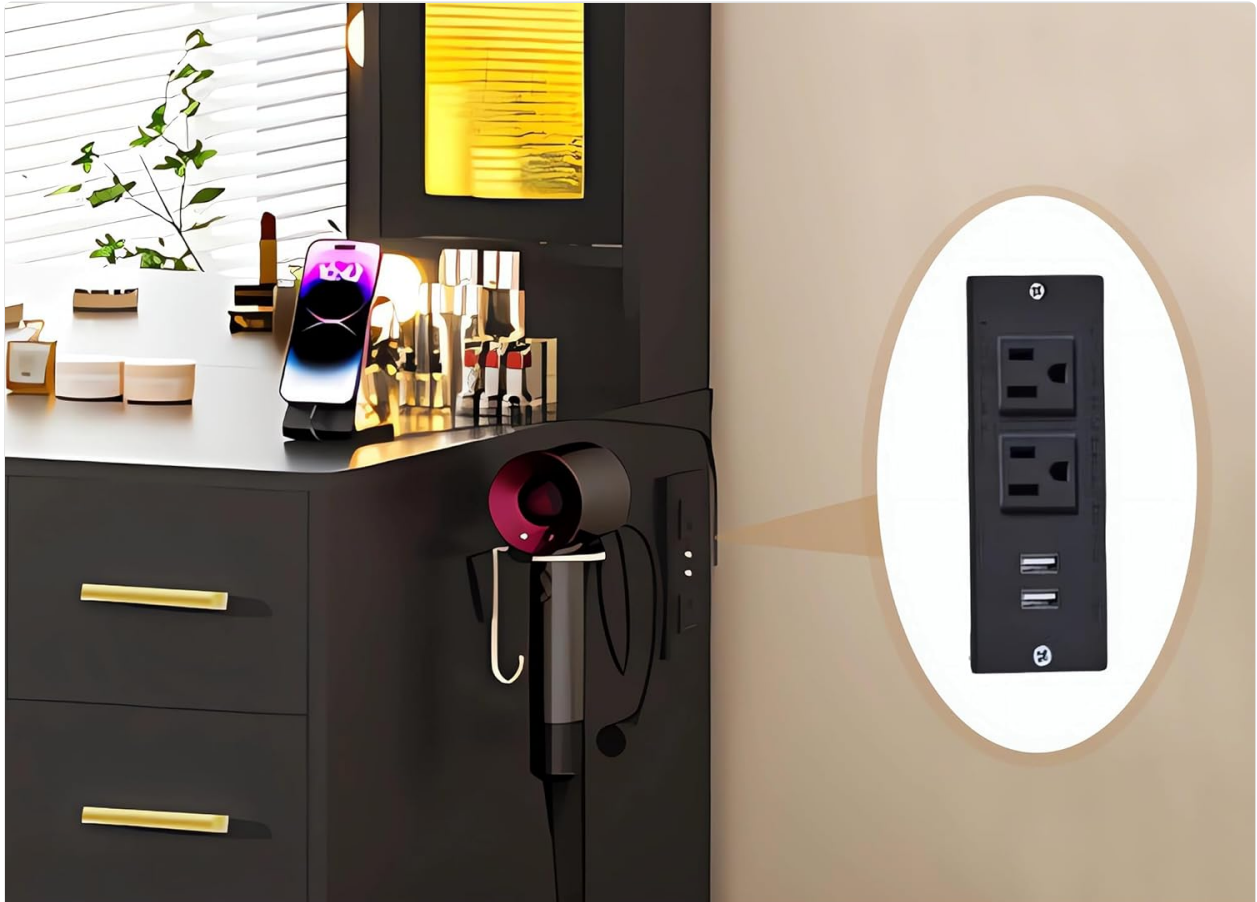

UL Certification
(Socket)



2 AC Outlets
(125V/12A)



2 USB Ports



4.9-Foot
(Power Cord)



1 Hair Dryer
Holder

Image: Built-in Power Outlet and Hair Dryer Holder. This image shows the integrated power strip with 2 standard plug sockets and 2 USB ports, along with a convenient hair dryer holder, allowing for easy access to styling tools and device charging.

19. Step 19: Assemble Drawer Boxes

Assemble the drawer boxes (Part 20, Part 21, Part 22, Part 23, Part 24) using screws (G, A, B).

20. Step 20: Assemble Drawer Fronts

Assemble the drawer fronts (Part 25, Part 26, Part 28, Part 29) using screws (G).

21. Step 21: Attach Drawer Slides to Drawer Boxes

Attach the drawer slides (NDR, NDL) to the assembled drawer boxes (Part 27) using screws (A, B).

22. Step 22: Install Drawer Slides to Drawer Boxes

Install the drawer slides (NDR, NDL) to the assembled drawer boxes (Part 20, Part 21, Part 23, Part 24) using screws (E).

23. Step 23: Attach Drawer Fronts to Drawer Boxes

Attach the drawer fronts (Part 25, Part 26, Part 27, Part 28, Part 29) to the drawer boxes using screws (E, NDL, NDR).

24. Step 24: Install LED Lights and Mirror

Carefully place the mirror into its designated slot. Attach the LED bulbs (Q) around the mirror and connect them to the power supply (O) using screws (F).



Image: LED Lighted Mirror Features. This image illustrates the three adjustable light color modes (Cold, Cool, Warm) and 10 brightness levels of the LED bulbs surrounding the mirror, controlled by a simple touch interface.

25. Step 25: Connect RGB LED Lighting System

Connect the RGB LED lighting system wires to the designated ports. Ensure all connections are secure.



Image: RGB LED Lighting System. This image highlights the RGB LED lighting system within the vanity cabinet, offering 22 dynamic modes, 20 static RGB colors, 256 PWM grade levels, 5 brightness grades, and 10 speed grades for customizable ambiance.

26. Step 26: Install Drawer Handles

Attach the handles (K) to all drawers using screws (L).

Your browser does not support the video tag.

Video: Vanity Desk Installation Guide. This video provides a comprehensive, step-by-step guide for assembling the vanity desk, including all components and electrical connections.

OPERATING INSTRUCTIONS

LED Lighted Mirror:

- **Power On/Off:** Press the touch switch on the mirror to turn the lights on or off.

- **Change Lighting Modes:** Short press the touch switch to cycle through 3 lighting modes: Cold Light (6000K), Cool Light (5000K), and Warm Light (4000K).
- **Adjust Brightness:** Long press the touch switch to adjust the brightness from 0% to 100%.

RGB LED Cabinet Lighting:

- The RGB lighting system is controlled via a switch, offering multiple static colors and dynamic lighting modes. Refer to the specific controller for detailed operation.

Power Outlet and USB Ports:

- Plug your hair dryer, curling iron, phone, tablet, or other electronics into the 2 standard AC plug sockets (125V/12A) or 2 USB ports.
- Ensure the vanity desk is plugged into a wall outlet using its 4.9-foot power cord.

MAINTENANCE AND CARE

- **Cleaning:** Wipe the vanity desk surfaces with a damp cloth. Avoid harsh chemicals or abrasive cleaners that may damage the finish.
- **Mirror Care:** Clean the mirror with a glass cleaner and a soft, lint-free cloth.
- **Electrical Components:** Ensure all electrical connections are secure. Do not attempt to repair electrical components yourself. Contact qualified personnel if issues arise.
- **Drawer Maintenance:** Periodically check drawer slides for smooth operation. Lubricate if necessary with a silicone-based spray.
- **General Care:** Avoid placing hot items directly on the surface. Use coasters or protective pads.

TROUBLESHOOTING

Problem	Possible Cause	Solution
LED Mirror Lights Not Working	Power cord unplugged. Faulty power outlet. Loose connection to LED bulbs.	Ensure power cord is securely plugged into a working outlet. Test the outlet with another device. Check all bulb connections.
RGB Cabinet Lights Not Working	Loose RGB strip connection. Controller issue.	Verify all RGB strip connections are firm. Check the RGB controller for power and functionality.

Problem	Possible Cause	Solution
Drawers Stick or Don't Close Smoothly	Improperly installed drawer slides. Obstruction in the drawer. Overloaded drawer.	Re-check drawer slide installation and alignment. Remove any items obstructing the drawer. Reduce the weight in the drawer.
Power Outlets/USB Ports Not Working	Vanity not plugged in. Circuit overload.	Ensure the main power cord is plugged into a live wall outlet. Unplug some devices to prevent overload.

SPECIFICATIONS

Feature	Detail
Model Number	SZT-H110-MUDAN2
Brand	ERLEJIA
Dimensions (L x W x H)	43.3"D x 15.74"W x 55.12"H
Item Weight	94.8 pounds
Material	Engineered Wood
Color	Black
Drawers	9 (1 large with 3 partitions, 8 middle)
Shelves	3 Open Shelves
Mirror Lighting	10 LED bulbs, 3 Lighting Modes (Cold, Cool, Warm), 10 Brightness Levels
Cabinet Lighting	RGB LED Lighting System (multiple static colors & dynamic modes)
Power Outlet	2 Standard AC Sockets (125V/12A), 2 USB Ports
Power Cord Length	4.9 feet
Assembly Required	Yes
Product Care	Wipe with Damp Cloth

WARRANTY AND SUPPORT

ERLEJIA products are designed for quality and durability. For specific warranty details and customer support,

please refer to the warranty card included in your package or contact ERLEJIA customer service directly.

Customer Support:

For any questions, missing parts, or assistance with assembly or operation, please contact ERLEJIA customer support. Contact information can typically be found on the product packaging or the official ERLEJIA website.