



Jantek PB-071 Push Button Instruction Manual

[Home](#) » [Jantek](#) » Jantek PB-071 Push Button Instruction Manual 



Taiwan jantek Electronics., Ltd





Product Name: Push Button

Product Type: PB-071


Features: There are four different switch & four face plates. European Standard, U. S.A. Standard and Narrow type for flush or surface mounting.

	PB-038A PB-071A PB-086A PB-040A	PB-038B PB-0716 PB-086B PB-040B	PB-038C PB-071C PB-086C PB-040C	PB-038D PB-071D PB-086D PB-040D	PB-071E PB-086E PB-040E	PB-071F PB-086F	PB-071G PB-086G PB-040G	KS-040 KS-071 KS-086
Mechanical life time	0.5 million operating	1 million operating	50 million operating	2 million operating	>2 million operating	>2 million operating	1 million operating	
Initial Contact Resistance	125VAC, 1A	48VDC, 2A	24V, 0.2A AC/DC	125VAC, 8A 24VDC, 6A	250VAC, 5A 125VAC, 8A	250VAC, 5A 125VAC, 8A	250VAC, 5A —	125VAC, 4A 250VAC, 2A
Operating Temperature	-5°C-50°C	-25°C-105°C	-40°C-85°C	-25°C-55°C	-25°C-55°C	-25°C-55°C	-20°C-55°C	-20°C-70°C
Degree of Protection	Non	Non	IP68 Certificate	IP65 Certificate	IP65 Certificate	IP65 Certificate	IP65 Certificate	Non
Lamp	Non	Non	Non	Yes (DC12V) tungsten lamp	LED(DC12V)	LED(DC12V)	LED(DC12V)	Non
Approvals	Non	Non	UL Listed CE Approved ISO 9002	CULCS CE Approved ISO 9001	CULCS CE Approved ISO 9001	CULCS CE Approved ISO 9001	Non	Non
Switch material	Plastic	Stainless Steel	Aluminum	Plastic	Plastic	Plastic	Stainless Steel	ideal Plzn bxl & ass
Switch Plate Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Dimension of Mated Switch	 ₂ Ox1mm	 ₂ 2x2mm	 ₂₈ x3rin	 29x141iim light DC12V 1.121	 ₃₀ x2. 3irm	 _{4,} 35x2. 3rn	 ,25x1. 8m m	 ₂₂ x7rrrn
Contact	NO	NO	NO	NO/NC	NO/NC	NO/NC	NO/NC	NO/NC


Dimension of Switch Plate & Key Switch Plate:

PB-038 90Lx38Wx33H(mm) PB-040 / KS-040 105Lx40W (mm) PB-071 / KS-071 116Lx71W(mm) PB-086 / KS-086 86Lx86W (mm) There are four different switch plate & three key switch plate dimensions—European Standard ,U.S.A Standard and narrow style for flush or surface mounting

Specifications: Dimension:PB-071: 116L X 71W X5H (m m)

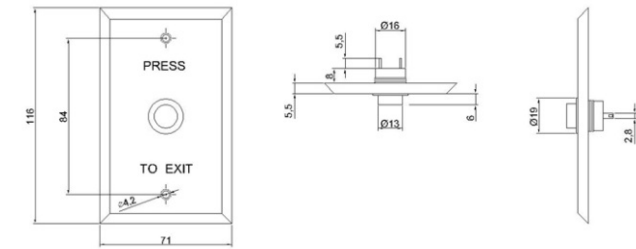


PB-071B

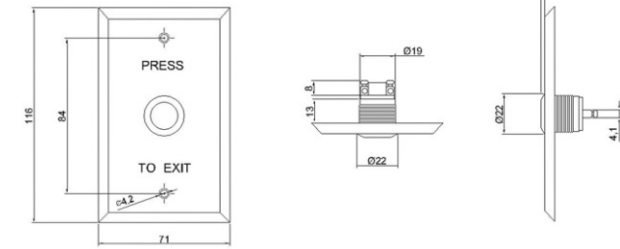


PB-071C

PB-071B-01

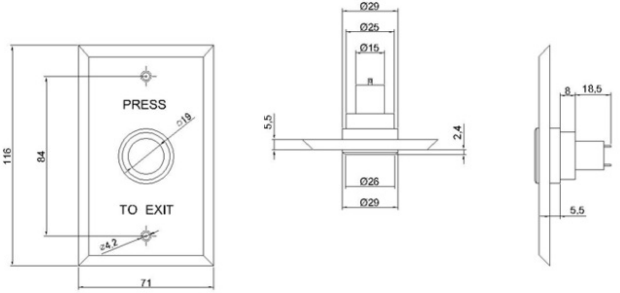


PB-071E-01

PB-071F

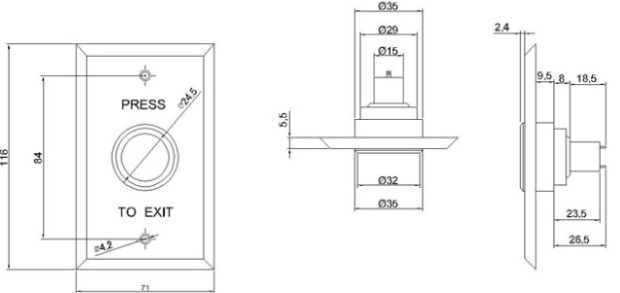


PB-071F-01

PB-071G

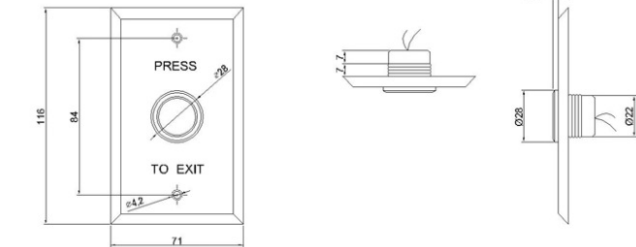


PB-071D

PB-071C-01

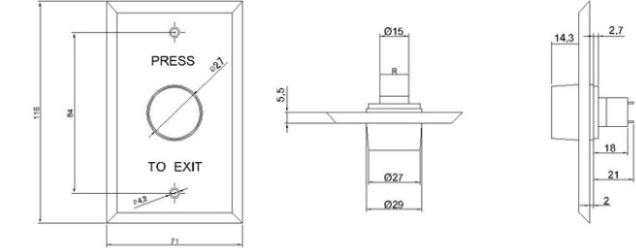

PB-071E

PB-071D-01

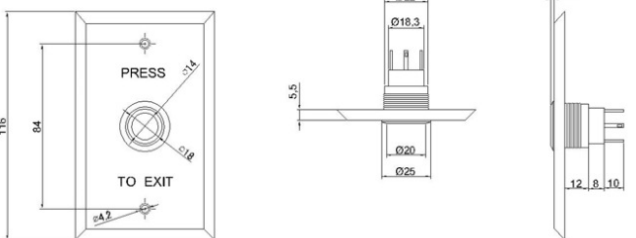

PB-071G-01

Contents

[1 Ordering Information:](#)

[2 Reference models:](#)

[3 Documents /
Resources](#)

[3.1 References](#)

[4 Related Posts](#)

Ordering Information:

Plastic Switch	Narrow type plate with surface mount housing	PB-038A
	Narrow type plate with flush mount	PB-040A
	U.S.A standard plate(surface-mount housing is an option device)	PB-071A
	European standard plate(surface-mount housing is an option device)	PB-086A
Stainless Steel Switch	Narrow type plate with surface mount housing	PB-038B
	Narrow type plate with flush mount	PB-040B
	U.S.A standard plate(surface-mount housing is an option device)	PB-071B
	European standard plate(surface-mount housing is an option device)	PB-086B
Aluminum Switch	Narrow type plate with surface mount housing	PB-038C
	Narrow type plate with flush mount	PB-040C
	U.S.A standard plate(surface-mount housing is an option device)	PB-071C
	European standard plate(surface-mount housing is an option device)	PB-086C
Plastic Switch with camp	Narrow type plate with surface mount housing	PB-038D
	Narrow type plate with flush mount	PB-040D/E
	U.S.A standard plate(surface-mount housing is an option device)	PB-071 D/E/F
	European standard plate(surface-mount housing is an option device)	PB-086D/E/F
with blue light	Narrow type plate with flush mount	PB-040G
	U.S.A standard plate(surface-mount housing is an option device)	PB-071G
	European standard plate(surface-mount housing is an option device)	PB-086G
Key Switch	Narrow type plate with flush mount	KS-040
	U.S.A standard plate(surface-mount housing is an option device)	KS071
	European standard plate(surface-mount housing is an option device)	KS-086

Reference models:

Taiwan Jantek Electronics.,
 Ltd. www.j3.ntek.com.tw Add:6F-1, No. 1, Wuquan 1st Rd., Xinzhuang District,
 TEL: 886-2-22991255 New Taipei City 24892, Taiwan, R.O.C. FAX : 02-2299-1257 / 02-2299-7412
 Email: service@jntek.com.tw

Documents / Resources



[Jantek PB-071 Push Button](#) [pdf] Instruction Manual
PB-071 Push Button, PB-071, Push Button

References

-  [TCPDF](#)
-  [TCPDF](#)