

Cecotec Conga M70

Cecotec Conga M70 Robot Vacuum and Mop: User Manual

Model: Conga M70



1. INTRODUCTION

This manual provides essential instructions for the safe and efficient operation, maintenance, and troubleshooting of your Cecotec Conga M70 Robot Vacuum and Mop. Please read this manual thoroughly before using the device and retain it for future reference.

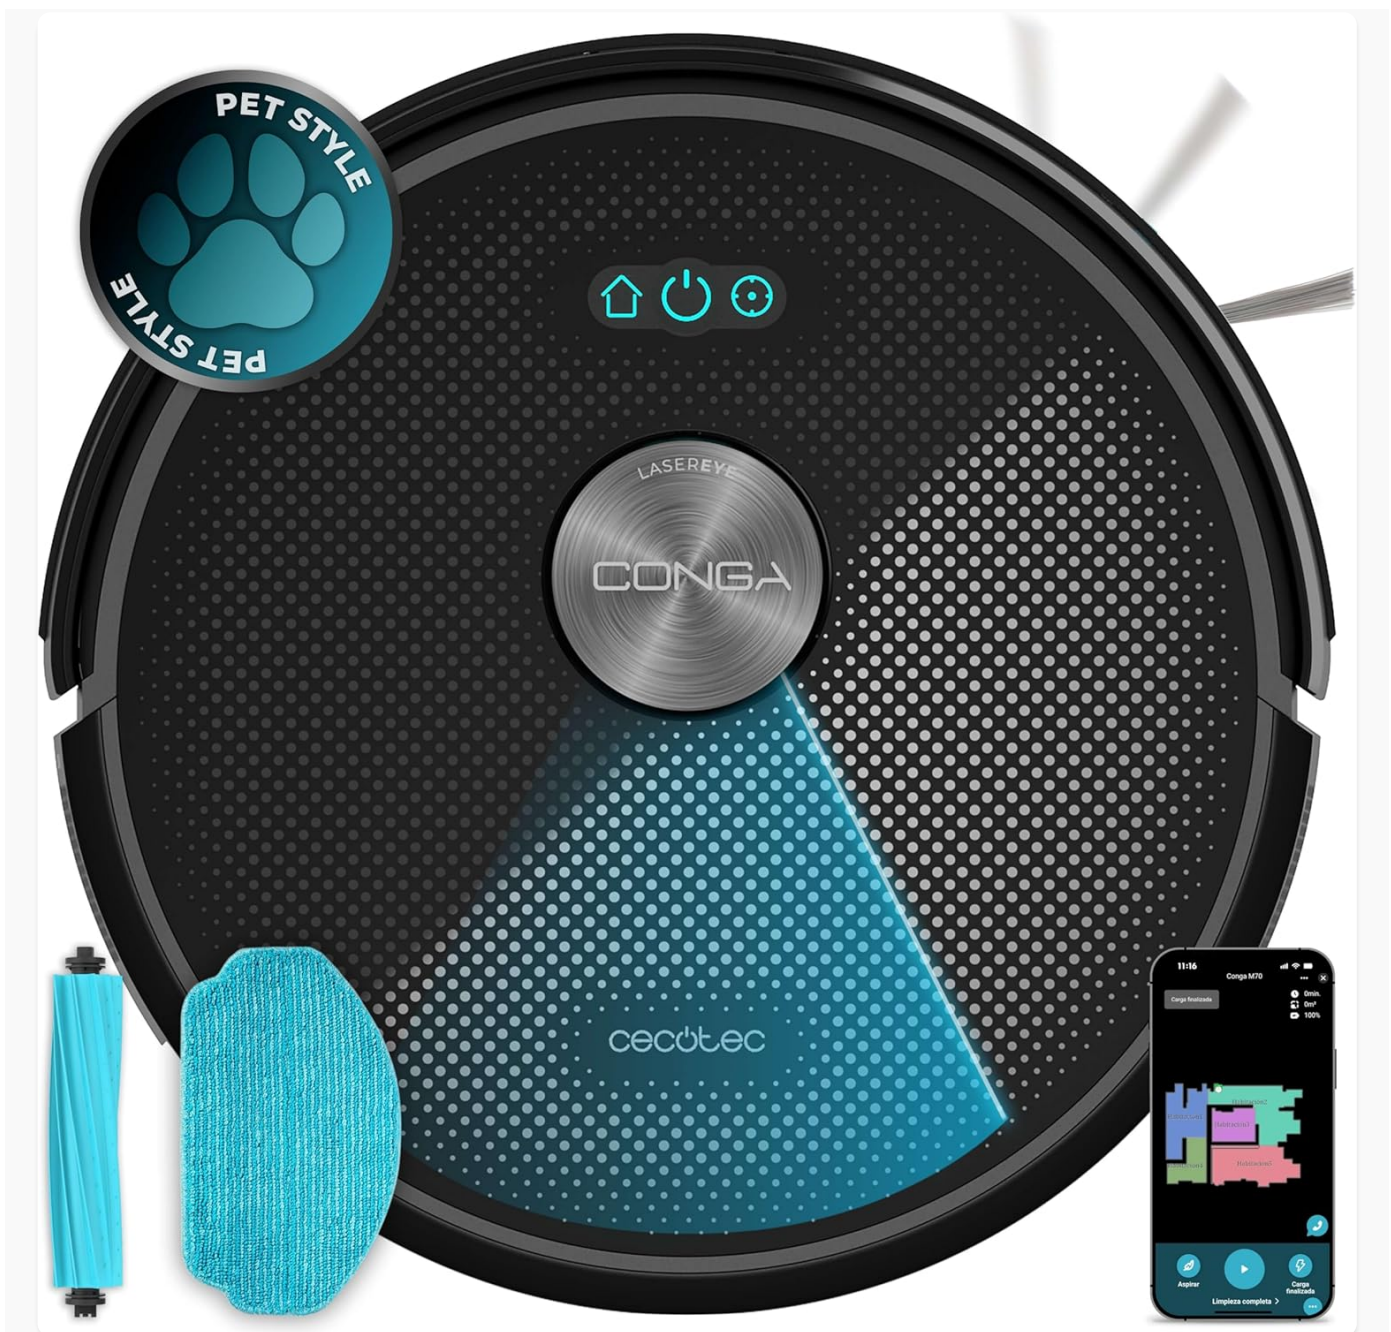


Image 1.1: The Cecotec Conga M70 Robot Vacuum and Mop, a versatile cleaning device.

2. SAFETY INSTRUCTIONS

Always follow basic safety precautions when using electrical appliances to reduce the risk of fire, electric shock, and personal injury.

- Read all instructions before use.
- Do not operate the robot in wet environments or near water.
- Keep hair, loose clothing, fingers, and all parts of the body away from openings and moving parts.
- Do not use the robot to pick up large objects, sharp objects, or burning/smoking materials.
- Ensure the charging base is placed against a wall on a level surface.
- Supervise children and ensure they do not play with the appliance.
- Only use the original power adapter and charging base provided by Cecotec.

3. PACKAGE CONTENTS

Verify that all components are present in the package:

- Cecotec Conga M70 Robot Vacuum and Mop
- Mop Cloth
- Charging Base
- Power Adapter
- Side Brushes (pre-installed or spare)
- High-Efficiency Filter (HEPA type)
- Cleaning Tool
- User Manual

4. PRODUCT OVERVIEW

Familiarize yourself with the main components of your Conga M70 robot.

Top View

The top panel features control buttons and the laser navigation sensor. The laser sensor allows the robot to create an interactive map of your home for precise and customized cleaning.

Limpieza personalizada y precisa con mapa interactivo.

Navegación láser.



Image 4.1: The Conga M70 utilizing its laser navigation system to map and clean with precision.

Bottom View

The underside includes the main brush, side brushes, driving wheels, and the water/dust tanks. The anti-tangle silicone brush is designed for effective cleaning, especially in homes with pets.

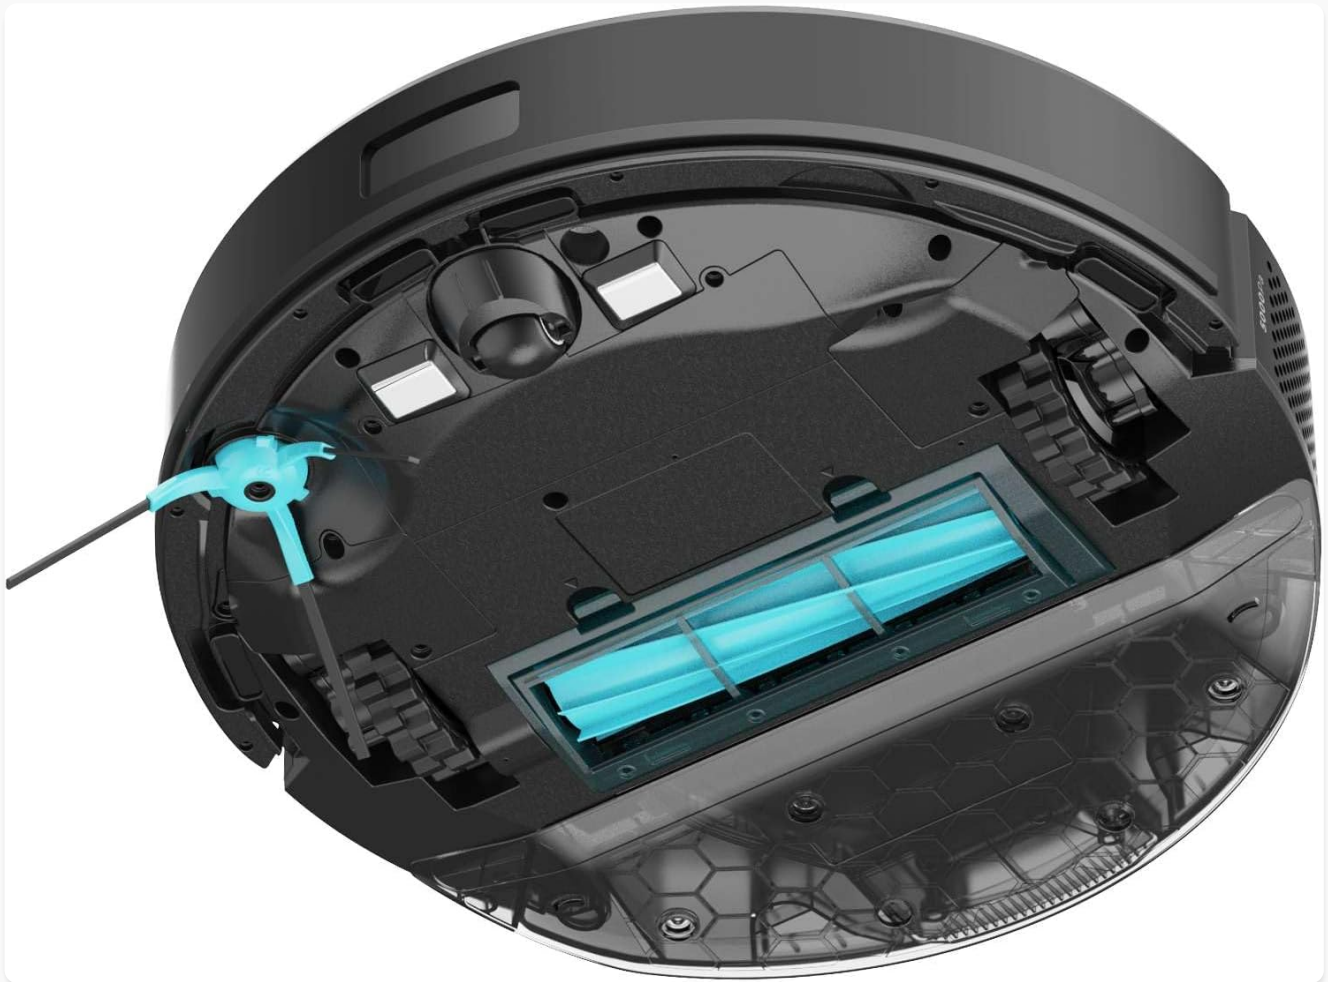


Image 4.2: Underside components of the Conga M70, including the main brush and side brushes.

5. SETUP

5.1 Charging Base Placement

Place the charging base against a wall in an open area, ensuring there are no obstacles within 1 meter to the sides and 2 meters in front. Connect the power adapter to the charging base and plug it into a power outlet.

5.2 Initial Charging

Place the robot on the charging base. Ensure the charging contacts on the robot align with those on the base. The robot will automatically begin charging. For first-time use, charge the robot completely (approximately 4-5 hours) before operation.



Image 5.1: The robot automatically returning to its charging base to ensure continuous operation.

5.3 App Connection (Cecotec App 3.0)

1. Download the 'Cecotec' app from your smartphone's app store.
2. Register an account and log in.
3. Follow the in-app instructions to add your Conga M70 robot. The robot supports both 2.4 GHz and 5 GHz Wi-Fi networks, and Bluetooth for quick pairing.
4. Once connected, you can define, plan, and schedule cleaning tasks.

Vinculación fácil y rápida.

Bluetooth y WiFi 2,4 + 5 GHz.



Image 5.2: The Conga M70 offers easy and fast pairing via Bluetooth and supports both 2.4 GHz and 5 GHz Wi-Fi networks.

6. OPERATING INSTRUCTIONS

6.1 Cleaning Modes

The Conga M70 offers multiple cleaning modes, including vacuuming, sweeping, mopping, and scrubbing, which can be combined for comprehensive cleaning.

Limpieza total de una pasada.

Aspira, barre, friega y pasa la mopa.



Image 6.1: The Conga M70 performing a complete cleaning pass, combining vacuuming, sweeping, mopping, and scrubbing.

6.2 Suction Power

Equipped with an Ungravity motor, the robot delivers 20000 Pa of suction power, effectively removing dirt from various surfaces, including high-pile carpets.



**Arrasa con la suciedad,
incluso en alfombras altas.**
Motor Ungravity con 20.000 Pa.

Image 6.2: Visual representation of the Conga M70's 20000 Pa suction power, capable of lifting heavy debris.

6.3 Mopping Function

The robot features a mopping function with three adjustable water flow levels, allowing for customized cleaning based on floor type and dirt level.

Fregado a medida para cada suelo.

3 niveles de caudal.

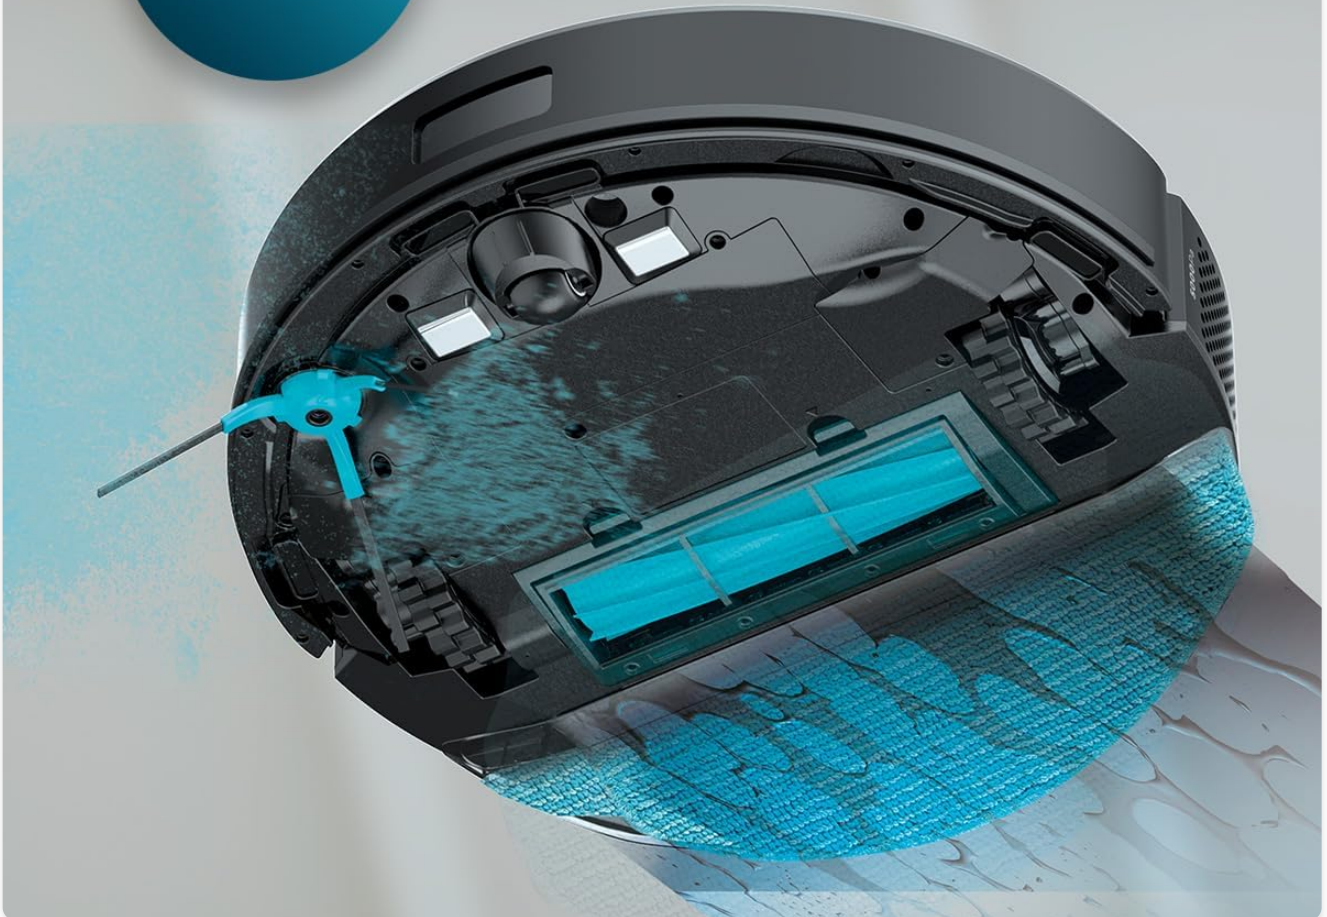


Image 6.3: The Conga M70's mopping system, illustrating three customizable water flow levels for different floor types.

6.4 App Control and Scheduling

Use the Cecotec App 3.0 to control the robot remotely, define cleaning zones, set no-go areas, and schedule cleaning times. The app provides an interactive map of your home for precise control.



**Define, planifica y
programa la limpieza por zonas.**

App 3.0.


Image 6.4: Controlling the Conga M70 via the Cecotec App 3.0, allowing users to define, plan, and schedule cleaning by zones.

6.5 Coverage and Battery

The 4500 mAh battery allows the robot to clean areas up to 180 m² without interruption. The Total Surface 3.0 technology ensures the robot completes its cleaning plan by returning to the charging base when needed and resuming cleaning.

Cubre pisos grandes sin parones.

Cubre hasta 180 m² (batería de 4500 mAh)*.

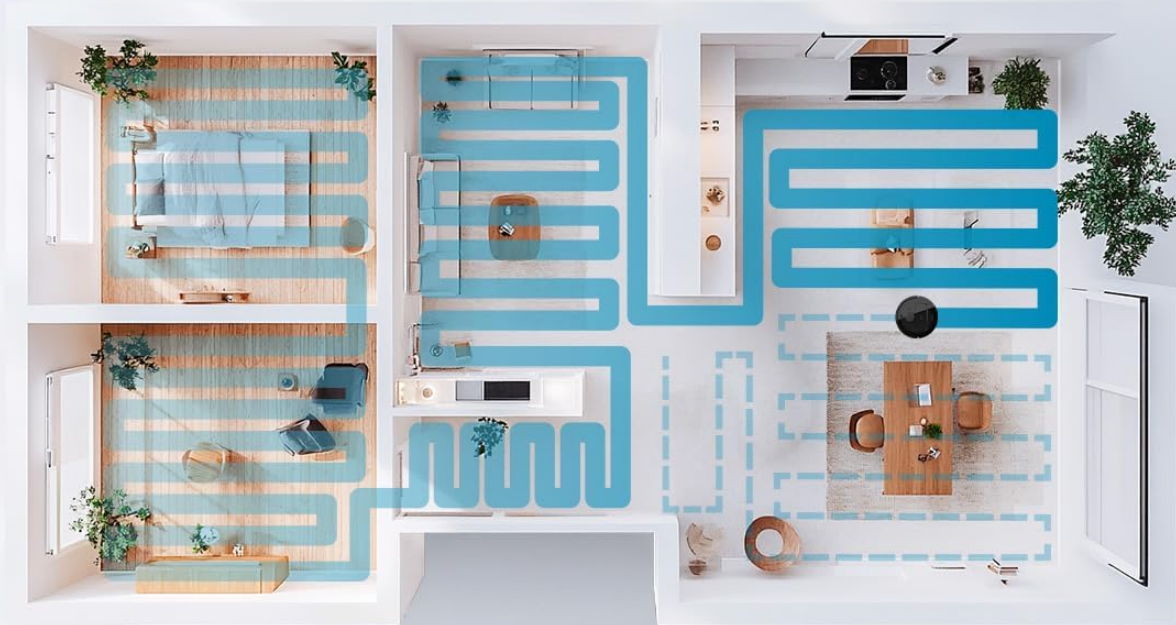

*Según las pruebas realizadas en el laboratorio.
El rendimiento real varía según la distribución del hogar.

Image 6.5: An illustration of the Conga M70's cleaning coverage, capable of cleaning large areas up to 180 m².

7. MAINTENANCE

Regular maintenance ensures optimal performance and extends the lifespan of your robot.

7.1 Dust and Water Tanks

The robot features dual tanks: a 400 ml dust tank and a 420 ml water tank. Empty the dust tank after each use and refill the water tank as needed for mopping. Clean both tanks regularly to prevent blockages and odors.

Limpieza continua sin vaciar los depósitos.

Doble depósito: agua de 420 ml y polvo de 400 ml.

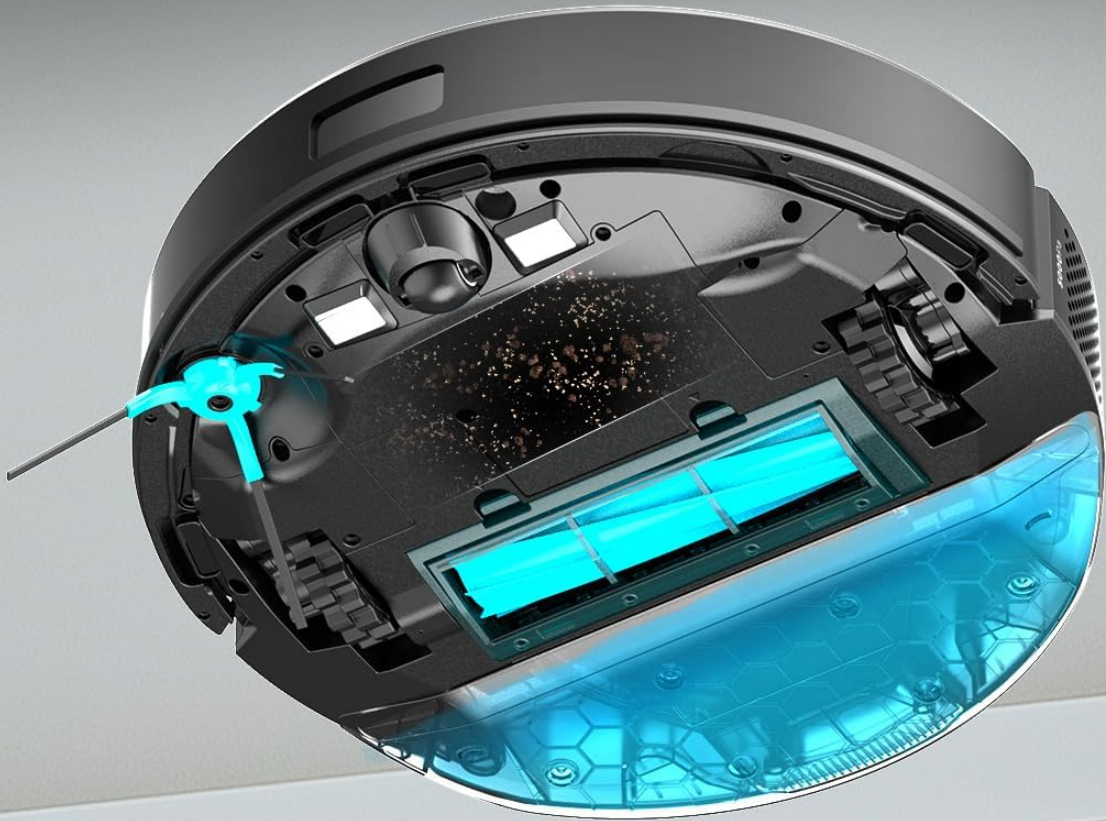


Image 7.1: The Conga M70's dual tanks for continuous cleaning without frequent emptying or refilling.

7.2 Main Brush and Side Brushes

Remove and clean the main anti-tangle silicone brush regularly, especially if you have pets. Use the provided cleaning tool to remove hair and debris. Inspect side brushes for wear and replace them if damaged.

Limpieza todoterreno sin enredos*.

Cepillo de silicona.



*La eficacia antienredos varía en función del tipo de pelo y su longitud.

Image 7.2: The anti-tangle silicone brush of the Conga M70, designed for effective cleaning in homes with pets.

7.3 Filters

Tap the HEPA filter to remove dust and debris. Do not wash the HEPA filter with water. Replace the filter every 3-6 months, depending on usage.

7.4 Sensors and Charging Contacts

Wipe all sensors and charging contacts on the robot and charging base with a dry cloth to ensure proper function and charging.

8. TROUBLESHOOTING

If you encounter issues with your Conga M70, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
---------	----------------	----------

Problem	Possible Cause	Solution
Robot does not turn on	Low battery; Power button not pressed	Charge the robot; Press and hold the power button.
Robot does not charge	Charging contacts dirty; Charging base not powered	Clean charging contacts; Ensure charging base is plugged in.
Poor cleaning performance	Dust tank full; Brushes tangled; Filter clogged	Empty dust tank; Clean brushes; Clean/replace filter.
Robot gets stuck frequently	Obstacles on floor; Sensors dirty	Clear floor of cables/small objects; Clean sensors.
App connectivity issues	Incorrect Wi-Fi password; Router issues; Robot too far from router	Verify Wi-Fi credentials; Restart router; Move robot closer to router.

9. SPECIFICATIONS

Feature	Specification
Brand	Cecotec
Model Name	Conga M70
Model Number	A01_EU01_114518
Navigation Type	Laser Navigation
Suction Power	20000 Pa
Battery Capacity	4500 mAh
Coverage Area	Up to 180 m²
Dust Tank Capacity	400 ml
Water Tank Capacity	420 ml
Special Features	Automatic Mopping, Anti-tangle Silicone Brush, App Control
Connectivity	Bluetooth, Wi-Fi (2.4 + 5 GHz)
Voltage	220 Volts
Filter Type	HEPA
Product Dimensions	32l x 32w x 10h cm
Product Weight	2.11 kg

10. WARRANTY AND SUPPORT






Your Cecotec Conga M70 Robot Vacuum and Mop comes with a standard manufacturer's warranty. For detailed warranty information, please refer to the warranty card included in your package or visit the official Cecotec website. For technical support, spare parts, or service inquiries, please contact Cecotec customer service through their

official channels. Keep your purchase receipt and product model number (Conga M70, A01_EU01_114518) handy when contacting support.

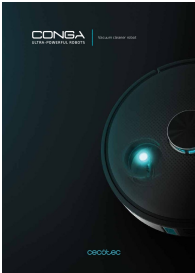

© 2025 Cecotec. All rights reserved.

Related Documents - Conga M70

	<p>Cecotec Conga Robot Vacuum Cleaners: Ultra-Powerful & Smart Cleaning Solutions</p> <p>Explore the advanced range of Cecotec Conga robot vacuum cleaners, featuring ultra-powerful suction, intelligent navigation, and versatile 4-in-1 cleaning capabilities for a spotless home.</p>
	<p>Conga 11090 Spin Revolution Home&Wash: Manual de Instrucciones y Uso</p> <p>Manual completo para el robot aspirador y fregasuelos Cecotec Conga 11090 Spin Revolution Home&Wash. Incluye guías de seguridad, operación, mantenimiento, solución de problemas y especificaciones técnicas.</p>
	<p>Manual de Usuario Cecotec Conga 7490 Eternal Genesis: Guía Completa</p> <p>Descubre el manual de usuario del robot aspirador Cecotec Conga 7490 Eternal Genesis. Aprende sobre su funcionamiento, mantenimiento, seguridad y características avanzadas para una limpieza eficiente en tu hogar.</p>
	<p>Conga 11090 Spin Revolution Home&Wash Manual de Instrucciones</p> <p>Manual completo para el robot aspirador Cecotec Conga 11090 Spin Revolution Home&Wash. Aprende sobre seguridad, configuración, modos de limpieza, mantenimiento y solución de problemas para optimizar el rendimiento de su dispositivo.</p>
	<p>Manual de Instrucciones Cecotec Conga Gyro Home Robot Aspirador</p> <p>Lea las instrucciones de seguridad y funcionamiento del robot aspirador Cecotec Conga Gyro Home. Incluye guía de instalación, mantenimiento y solución de problemas.</p>



[Cecotec Conga 1090/1099 Robot Vacuum Cleaner Manual](#)

Comprehensive user manual for the Cecotec Conga 1090 and 1099 series robot vacuum cleaners, covering safety instructions, components, operation, maintenance, and troubleshooting.