

JC-LGL H5-4H LED Construction String Lights Round Series User Manual

Home » JC-LGL » JC-LGL H5-4H LED Construction String Lights Round Series User Manual

Contents

- 1 JC-LGL H5-4H LED Construction String Lights Round Series
- **2 Product Information**
- **3 Product Usage Instructions**
- 4 Overview
- **5 BASIC INFO**
- **6 Safety Instruction**
- **7 LINKABLE**
- 8 Documents / Resources
 - 8.1 References



JC-LGL H5-4H LED Construction String Lights Round Series



Product Information

Specifications:

• Length: 2900mm/114" (5pcs) or 3000mm/118" (10pcs)

• Wattage: 65W (5pcs) or 130W (10pcs)

• Lumen Output: 8000LM (65W) or 16000LM (130W)

• CCT: 5000K

• Voltage: AC120V

• CRI: >80

Beam Angle: WideIP Rating: IP65

• Application: Suitable for construction sites or any location requiring temporary light string

• Linkable: 65W – Connect up to 6 bunches, 130W – Connect up to 3 bunches

Product Usage Instructions

Installation:

- 1. Hang the LED string work light securely at the desired location using the provided hooks.
- 2. Ensure the power source is compatible with AC120V before connecting the light.

Linking Multiple Units:

- 1. For the 65W model, you can connect up to 6 bunches of lights in a series using the linkable feature.
- 2. For the 130W model, connect up to 3 bunches in a series for optimal performance.

Operating the Light:

- 1. Once installed and linked, switch on the power source to illuminate the LED string work light.
- 2. Ensure the light is positioned to provide optimal coverage for the intended area.

Maintenance:

- Regularly inspect the lights for any damage or signs of wear.
- Keep the lights clean by wiping them with a damp cloth when necessary.

Frequently Asked Questions:


• Q: Can I use these lights outdoors?


A: Yes, these lights are suitable for outdoor use, but ensure they are not exposed to direct water contact.

• Q: What is the lifespan of these LED lights?

A: The LED lights have a long lifespan of approximately 50,000 hours under normal usage conditions.

Overview

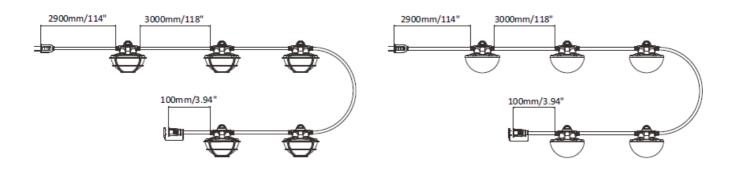

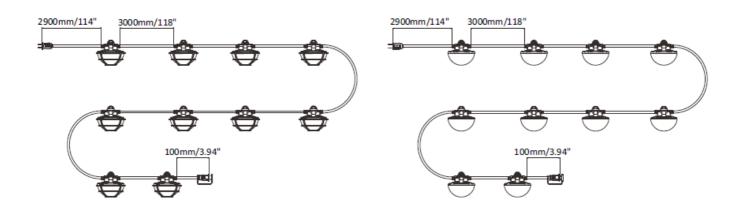

BASIC INFO

Watt	Lamp Quantity	Lumen	Length	ССТ	Voltage	CRI	Beam An gle	IP Rating
65W	5pcs	8000LM	50ft					Wet
130W	10pcs	16000LM	100ft	5000K	AC120V	>80	270°	Location

Application:

Suitable for construction sites or any other location requiring temporary light strings.

Safety Instruction

- Make sure the distances between the live part of the device and the metal parts are enough to prevent any
 insulation leaking.
- Before installation and maintenance of the device, please disconnect the power to prevent electric shock.
- The LED temporary light string must be installed in an appropriate environment, operating in hash environments may shorten the lifespan or even damage the device.
- Please keep the device away from any corrosive substance, and clean it with a dry cloth only.
- To ensure personal safety, please make sure the device is staying firmly and securely when installtion high places.

LINKABLE

- 65W For only use with this product connect up to 6 bunches
- 130W For only use with this product connect up to 3 bunches.

Documents / Resources



JC-LGL H5-4H LED Construction String Lights Round Series [pdf] User Manual H5-4H LED Construction String Lights Round Series, H5-4H, LED Construction String Lights Round Series, Series

References

• User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.