



Home » JIAXING » JIAXING LK-QCB09 Wireless Calling System Instruction Manual




Wireless Calling System

Contents [hide]

- 1 Functional Diagram
- 2 Parameter*
- 3 Instruction
- 4 Settings
- 5 FCC Warning:
- 6 Documents / Resources
 - 6.1 References

Functional Diagram

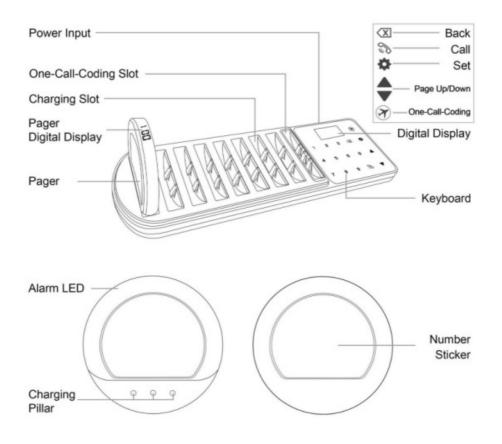

Parameter*

Transmitter		Pager	
Input Power	DC12V/2A	Battery	Li-ion 3.7V 200mAh
Frequency	433.92MHz	Frequency	433.92MHz
Transmit Power	+26dBm	Standby Current	<15mA
Standby Power	<1W	Standby Duration	20h
Modulation Type	ООК	Sensitivity	-115dBm
Slots	8 Charging Slots + 1 Quick-Coding slot	Max Distance	500m in open area
Max Capacity	998 pagers	Dimensions	(I)80*12mm
Dimensions	290'93'31 mm	Material	ABS
Material	ABS	Prompt Mode	Vibration/Beep/Flas


Keyboard	Touching Pad	Alarm Time	1-999s	

*The parameters were measured in laboratory. They may vary depend on using cycles and environment.


Instruction

A. Before using

1. Please charge for more than 10 mins.




2. LEDs fast flash during charging. while stay on when fully charged.




B. Normal coding (To code multiple pagers)


1. Long press "SET", "F1" is displayed.




2. Press charging LEDs on pagers turn off,— flashes on pagers. 000 flashes on transmitter.



3. Input the number(1-998)and press to confirm, and all pagers on the charging base will display the number and flash.




4. Pick up the pager and it short beeps, code matching is done. Repeat above steps to program other pagers.




C. One-Call-Coding (To code pagers one-by-one)

1. Place the pager in the One-Call-Coding slot, the pager enters the code matching state. Input the number (1-998)and press to confirm, and the pager on the One-Call-Coding slot will display the number and flash.

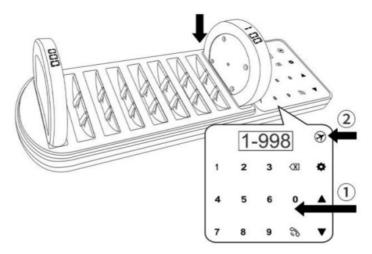


2. Pick up the pager and it short beeps code matching is done. Repeat above steps to program other pagers.




D. Calling

1. Input the number and press CALL.




2. The called pager will start alarm. Putting back to the charging base can stop alarm.




E. One-Call-Off

1. On Call status, Call999 all charging pagers will be off.

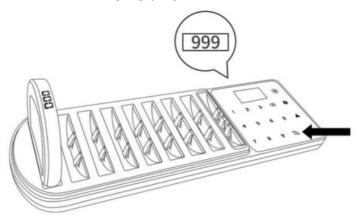

2. All LEDs are off if taking out the pager. Re-charge pagers will turn on again. This instruction is invalid to the pagers not being charged.



Settings

Me nu	Instr uctio n	Function	Operation
FI		Programming Mode	As shown preceding
	0	Transmitter, feedback disabled	In F2, call 000, no feedback on keyboard when t ouching.
	1	Transmitter, beep fee dback	In F2, call 001, only beep feedback on keyboard when touching
	2	Transmitter, vibration feedback	In F2, call 002, only vibration feedback on keyboard when touching
	3	Transmitter, beep & v ibration feedback	In F2, call 003, beep & vibration both feedback on keyboard when touching
	4	Pager, beep alarm m ode	In F2, call 004, pager alarms by beep only.
	5	Pager, vibration alar m mode	In F2, call 005, pager alarms by vibration only.
	6	Pager, LED Flash ala rm mode	In F2, call 006, pager alarms by LED Flash only.
F2	7	Pager, beep + vibrati on alarm	In F2, call 007, pager alarms by beep & vibratio n both.
	8	Pager, vibration + LE D Flash alarm	In F2, call 008, pager alarms by vibration & LED Flash both.
	9	Pager, beep + LED FI ash alarm	In F2, call 009, pager alarms by beep & LED Fla sh both.

	10	Pager, beep + vibrati on + LED Flash alar m	In F2, call 010, pager alarms by beep & vibratio n & LED Flash all.
	11	Pager slow beeps	In F2, call 011, pager slow beeps when alarm.
	12	Pager fast beeps	In F2, call 012, pager fast beeps when alarm. (D efault)
F3		Set Length of Alarm Time	In F3, 015 is displayed. Input number(1-999s) a nd press CALL. The alarm time can be set from 1s to 999s.
F4		Set Repeat Alarm Ti mes	In F4, 015 is displayed. Input number(1-999s) a nd press CALL. The pager will alarm again after the set time if the pager not being put into charg ing slot.
F5		Set Transmitter ID	In F5, the transmitter ID is displayed. You can change it by input a new number and press call to save.

Note

- 1. X: To return the previous menu, or to cancel the input.
- 2. ▲ /▼: In call mode, they are used to check recent 10 called numbers. The showing number can be re-called by pressing CALL. In setting mode, they are used for page up/down.
- 3. In F2, the instructions only can be inputted by Page Up/Down.
- 4. In F4, when set to 000 will disable the function of repeated reminders.
- 5. It takes about 4 hours for pagers to fully charged.

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide

reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.



Documents / Resources



JIAXING LK-QCB09 Wireless Calling System [pdf] Instruction Manual LK-QCB09, LK-QCB09 Wireless Calling System, Wireless Calling System, Calling System

References

- User Manual
 - Calling System, JIAXING, LK-QCB09, LK-QCB09 Wireless Calling System, Wireless Calling
- JIAXING System

Leave a comment

Your email address will not be published. Required fields are marked *

Comment *
Name
Email
Website
☐ Save my name, email, and website in this browser for the next time I comment.
Post Comment
Search:
e.g. whirlpool wrf535swhz

Manuals+ | Upload | Deep Search | Privacy Policy | @manuals.plus | YouTube

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos

are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of
these marks on this website does not imply any affiliation with or endorsement.