

**JOCEL®**



**DEHUMIDIFIER  
JDE001405  
INSTRUCTION MANUAL**



Please keep this manual carefully for further reference!

Thank you for selecting our dehumidifier. Be sure to read this manual carefully before using it. Any questions, please contact the professional service for help.

## **Contents** [ [hide](#) ]

- 1 BEFORE YOU START
- 2 FOR YOUR SAFETY
- 3 PRODUCT OVERVIEW
- 4 SPECIFICATIONS
- 5 INSTALATION
- 6 OPERATION
- 7 DRENAGEM
- 8 MAINTENANCE
- 9 TROUBLE SHOOTING
- 10 DECOMMISSIONING
- 11 DISPOSAL
- 12 GENERAL WARRANTY TERMS
- 13 DECLARATION OF CONFORMITY
- 14 Documents / Resources
  - 14.1 References

## **BEFORE YOU START**





Read the instruction manual carefully before using the Dehumidifier for the first time.

### **PRODUCT DESCRIPTION**

The dehumidifier is used to remove excessive moisture from the air. The resulting reduction in relative humidity protects buildings and their contents from the adverse effects of excess humidity.

The environmentally friendly R290 is used as the refrigerant. R290 has no damaging influence on the ozone layer (ODP), a negligible greenhouse effect (GWP) and is available worldwide. Because of its efficient energy properties, R290 is highly suitable as a coolant for this application. Special precautions must be taken into consideration due to the coolant's high flammability.

### **SYMBOLS FROM THE UNIT AND USER MANUAL**

 warning	This unit uses a flammable refrigerant. If refrigerant leaks and comes in contact with fire or heating part, it will create harmful gas and there is risk of fire.
	Read the USER MANUAL carefully before operation.
	Further information is available in the USER MANUAL, or other similar documents.
	Service personnel are required to carefully read the USER MANUAL and SERVICE MANUAL before operation.

## THE FOLLOWING SHOULD ALWAYS BE OBSERVED FOR SAFETY

- This appliance is designed for Domestic & Commercial use.
- This appliance can be used by children aged from 16 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.
- The unit is designed only for use with R-290(propane) gas as the designated refrigerant.
- The refrigerant loop is sealed. Only a qualified technician should attempt to service!
- Do not discharge the refrigerant into the atmosphere.
- R-290 (propane) is flammable and heavier than air.
- It collects first in low areas but can be circulated by the fans.
- If propane gas is present or even suspected, do not allow untrained personnel to attempt to find the cause.
- The propane gas used in the unit has no odor.
- The lack of smell does not indicate a lack of escaped gas.
- If a leak is detected, immediately evacuate all persons from the store, ventilate the room and contact the local fire department to advise them that a propane leak has occurred.
- Do not let any persons back into the room until the qualified service technician has

arrived and that technician advises that it is safe to return to the store.

- No open flames, cigarettes or other possible sources of ignition should be used inside or in the vicinity of the units.
- Component parts are designed for propane and non-incentive and non-sparking. Component parts shall only be replaced with identical repair parts.

## **FAILURE TO ABIDE BY THIS WARNING COULD RESULT IN AN EXPLOSION, DEATH, INJURY AND PROPERTY DAMA**



## **FOR YOUR SAFETY**

Your safety is the most important to us!


Please read this manual carefully and fully understand before operating your dehumidifier.


## **OPERATIONAL PRECAUTIONS**

**WARNING** – to reduce the risk of fire, electric shock or injury to persons or property:

- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- The appliance should be disconnected from its power source during maintenance.
- Always operate the unit from a power source of equal voltage, frequency and rating as indicated on the product identification plate.
- Always use a power outlet that is grounded.
- Unplug the power cord when cleaning or when not in use.
- Do not operate with wet hands. Prevent water from spilling onto the unit.
- Do not immerse or expose the unit to rain, moisture or any other liquid.
- Do not leave the unit running unattended. Do not tilt or turn over the unit.
- Do not unplug while the unit is operating.
- Do not unplug by pulling on the power cord.
- Do not use an extension cord or an adapter plug.
- Do not put objects on the unit.
- Do not climb or sit on the unit.

- Do not insert fingers or other objects into the air outlet.
- Do not touch the air inlet or the aluminum fins of the unit.
- Do not operate the unit if it is dropped, damaged or showing signs of product malfunction.
- Do not clean the appliance with any chemicals.
- Ensure the unit is far away from fire, inflammable, or explosive objects.
- The unit shall be installed in accordance with national wiring regulations.
- Do not use means to accelerate the defrosting process or to clean, other than those recommended by the manufacture.
- The appliance shall be stored in a room without continuously operation sources (for example: open flames, an operating gas appliance or an operating electric heater).
- The appliance shall be stored so as to prevent mechanical damage from occurring.
- Do not piece or burn, even after use.
- Be aware that refrigerants may not contain an odor.
- Pipe-work shall be protected from physical damage and shall not be installed in an unventilated space, if that space is smaller than 4m<sup>2</sup>.
- Compliance with national gas regulations shall be observed.
- Keep any required ventilation openings clear of obstruction.
- The appliance shall be stored in a well-ventilated area where the room size corresponds to the room area as specified for operation.

 Any person who is involved with working on or breaking into a refrigerant circuit should hold a current valid certificate from an industry-accredited assessment authority, which authorizes their competence to handle refrigerants safely in accordance with an industry, recognized assessment specification.

 Servicing shall only be performed as recommended by the equipment manufacturer. Maintenance and repair requiring the assistance of other skilled personnel shall be carried out under the supervision of the person competent in the use of flammable refrigerants. If you don't understand something or need help, please contact the dealer services.

## **SAFETY PRECAUTIONS ON SERVICING**

Please follow these warnings when to undertake the following when servicing a dehumidifier with R290.

## **CHECKS TO THE AREA**

Prior to beginning work on systems containing flammable refrigerants, safety checks are necessary to ensure that the risk of ignition is minimized. For repair to the refrigerating system, the following precautions shall be complied with prior to conducting work on the system.

## **WORK PROCEDURE**

Work shall be undertaken under a controlled procedure so as to minimize the risk of a flammable gas or vapor being present while the work is being performed.

## **GENERAL WORK AREA**

All maintenance staff and others working in the local area shall be instructed on the nature of work being carried out. Work in confined spaces shall be avoided. The area around the workspace shall be sectioned off. Ensure that the conditions within the area have been made safe by control of flammable material.

## **CHECKING FOR PRESENCE OF REFRIGERANT**

The area shall be checked with an appropriate refrigerant detector prior to and during work, to ensure the technician is aware of potentially flammable atmospheres. Ensure that the leak detection equipment being used is suitable for use with flammable refrigerants, i.e. no sparking, adequately sealed or intrinsically safe.

## **PRESENCE OF FIRE EXTINGUISHER**

If any hot work is to be conducted on the refrigeration equipment or any associated parts, appropriate fire extinguishing equipment shall be available to hand. Have a dry powder or CO<sub>2</sub> fire extinguisher adjacent to the charging area.

## **NO IGNITION SOURCES**

No person carrying out work in relation to a refrigeration system which involves exposing any pipe work that contains or has contained flammable refrigerant shall use any sources of ignition in such a manner that it may lead to the risk of fire or explosion. All possible ignition sources, including cigarette smoking, should be kept sufficiently far away from the site of installation, repairing, removing and disposal, during which flammable refrigerant can possibly be released to the surrounding space. Prior to work taking place, the area around the equipment is to be surveyed to make sure that there are no flammable hazards or ignition risks. "No Smoking" signs shall be displayed.

## **VENTILATED AREA**

Ensure that the area is in the open or that it is adequately ventilated before breaking into the system or conducting any hot work. A degree of ventilation shall continue during the

period that the work is carried out. The ventilation should safely disperse any released refrigerant and preferably expel it externally into the atmosphere.

## **CHECKS TO THE REFRIGERATION EQUIPMENT**

Where electrical components are being changed, they shall be fit for the purpose and to the correct specification. At all times the manufacturer's maintenance and service guidelines shall be followed. If in doubt consult the manufacturer's technical department for assistance.

The following checks shall be applied to installations using flammable refrigerants:

- The charge size is in accordance with the room size within which the refrigerant containing parts are installed;
- The ventilation machinery and outlets are operating adequately and are not obstructed;
- If an indirect refrigerating circuit is being used, the secondary circuit shall be checked for the presence of refrigerant;
- Marking to the equipment continues to be visible and legible. Markings and signs that are illegible shall be corrected;
- refrigeration pipe or components are installed in a position where they are unlikely to be exposed to any substance which may corrode refrigerant containing components, unless the components are constructed of materials which are inherently resistant to being corroded or are suitably protected against being so corroded.

## **CHECKS TO ELECTRICAL DEVICES**


Repair and maintenance to electrical components shall include initial safety checks and component inspection procedures. If a fault exists that could compromise safety, then no electrical supply shall be connected to the circuit until it is satisfactorily dealt with. If the fault cannot be corrected immediately but it is necessary to continue operation, an adequate temporary solution shall be used. This shall be reported to the owner of the equipment so all parties are advised.

Initial safety checks shall include:

- those capacitors are discharged: this shall be done in a safe manner to avoid possibility of sparking;
- that there no live electrical components and wiring are exposed while charging, recovering or purging the system;
- that there is continuity of earth bonding.

# PRODUCT OVERVIEW

## PRODUCT VIEW

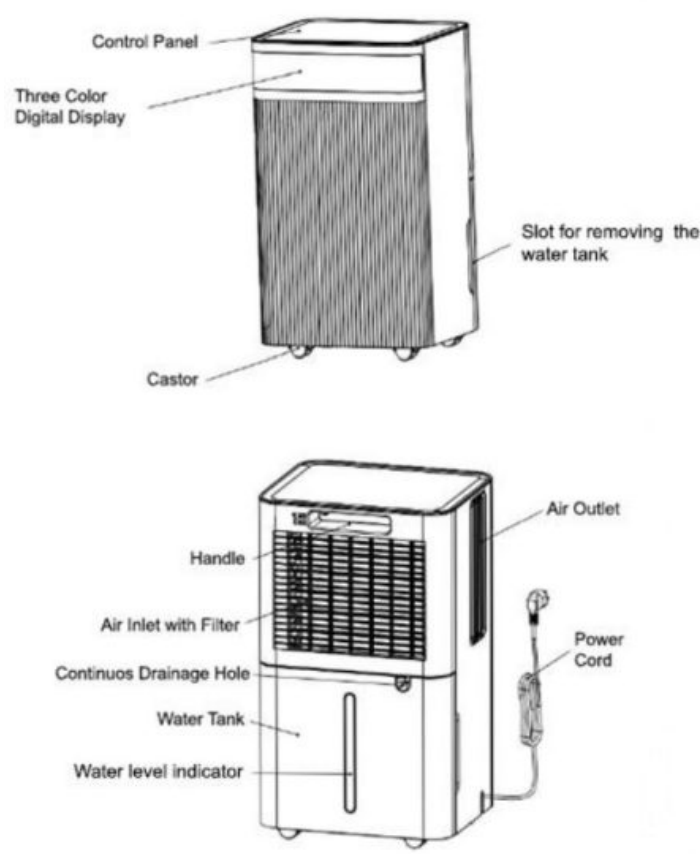

## SPECIFICATIONS

MODEL	JDE001405
Dehumification Capacity	12L/D (30°C, RH80%)
Rated Voltage	AC220-240V/50Hz
Max .rated Input Power Current	200W/1.2A (30°C, RH80%)
Noise	≤38dB(A)
Water Tank Capacity	2L
Maximum Refrigerant Charge	R290
Net weight	10kg




Maximum Design Pressure	High Side: 3.2MPa, Low Side:0.7MPa
Recommended room size	25

## INSTALATION

### LOCATION

1. Place the unit on a firm, level surface in an area with at least 30cm of free space around it to allow for proper air circulation.
2. Never install the unit where it could be subject to
  - Heat sources such as radiators, heat registers, stoves or other products that products that produce heat.
  - In an area where oil or water may be splashed
  - Direct sunlight
  - Mechanical vibration or shock
  - Excessive dust
  - Lack of ventilation, such as cabinet or bookcase
  - Uneven surface

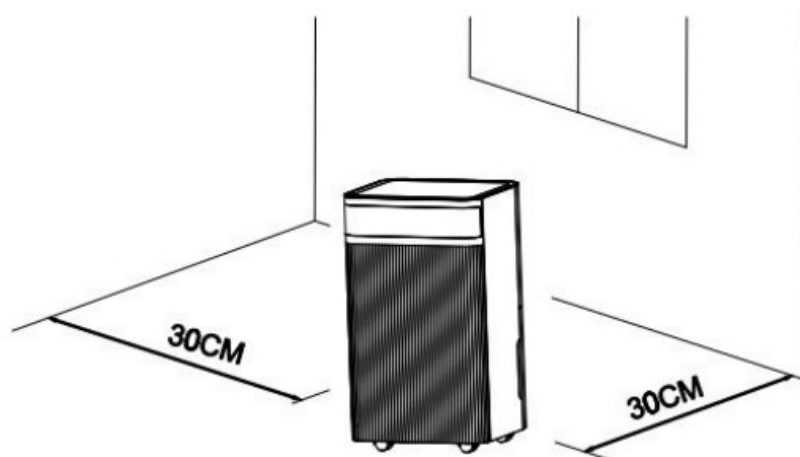

### WARNING

Install the unit in rooms which exceed 4 m<sup>2</sup>.

Do not install the unit in a place where inflammable gas may leak.

### NOTE


The manufacture may provide other suitable example or may provide additional information about the refrigerant odor.

## **OPERATING THE DEVICE SAFELY**

- Check the device after unpacking for any damages or scratches on it.
- Operate this unit in an ambient temperature from 5°C to 35°C.
- Do not use in the outdoors. This dehumidifier is intended for indoor residential applications only.
- Do not operate in close proximity to walls, curtains, or other objects that may block inlet and outlet.
- Keep the air inlet and outlet free of obstacles.
- Adjusting the wind deflector in the upward direction prior to start up. (only for some models).
- If tipped more than 45°, allow the unit to set upright for at least 24 hours before start up.
- Keep doors and windows close for better energy saving.
- Do not operate or store the unit in direct sunlight or rain.
- It is normal for air outlet to feel warm to touch after continuous operation on hot days.
- Empty the water tank before moving the device.
- Make sure the Water tank is correctly fitted otherwise the unit will not operate properly.
- The dehumidifier starts up in the mode selected when the unit was last used.
- The dehumidifier starts dehumidifying if the room humidity is 3% higher than the selected humidity.
- There is a protective 3-minutes time delay of the compressor. Wait 3 minutes for the dehumidifier to resume dehumidification.

## **OPERATION**

### **CONTROL PANEL**



### **SETTINGS**

 **Power**

Press the POWER button to turn on the machine, the running indicator lights up and the default fan speed is high, and the default humidity setting is 50%RH. When the machine is running, press the power button to turn off, the running indicator light goes off.

## **Mode**

Press the mode button to switch between Auto Mode and Continuously Mode/Dry (continuously dehumidify), the corresponding indicator will light up.

Press and hold this button for 3 seconds to enter sleep mode

- **Auto mode:** when environmental humidity  $\geq$  set humidity +3%, the fan starts working and compressor starts working after 3 seconds if the machine is out of range of 3 minutes delay start protection.

When environmental humidity  $\leq$  set humidity -3%, the compressor stops working and fan stops working after 30 seconds' delay.

Both fan speed and humidity setting can be adjusted under Auto mode.

- **Continuously dehumidify mode:** In this mode, the machine will continue to run in high fan speed, fan speed is adjustable, humidity setting cannot be adjusted
- **Sleep mode:** In sleep mode, the target humidity is 60%RH, and after no operation for 10 seconds, except sleeping mode indicator light, power indicator light and child lock indicator light will dark, other the indicator lights and display screen will be off.

In sleeping mode, when the water tank is full, the machine will not alarm, but the water tank full indicator light will be on (red color) to remind that the water tank is full and you need to empty the water tank.

## **Timer**

Press the timing key to set timing / check timing / cancel timing

a) In the non timing state: press the timing key to enter the timing setting state. The digital screen flashes to display the timing time. During the flashing period of the digital screen, press the set key to adjust the timing time (0 ~ 24h).

b) In the timing state: press the timing key, and the digital screen flashes to display the remaining timing time. Press the timing key again during the flashing period of the digital screen to cancel the timing.

## **Fan Speed button**

Press this button to switch the fan speed between high and low fan speed cycle, and the

corresponding indicator light will be on.



### **Humidity set**

Touch the humidity button to check the current environment humidity, touch this button again and you can set the humidity. The range of target humidity is 30%- 35% – 40% – 45% – 50% – 55%- 60% – 65% -70% – 75%- 80%. After setting 3 seconds, the system confirms the input value and then the machine exits the setting state, and returns the current humidity. In the drying mode, the target humidity cannot be changed.

Long Press humidity button for 3 seconds to display the current ambient temperature.



### **Child Lock**

Long press 3 seconds to turn on/off the child lock function.

## **WIFI CONNECTION**

### **INFORMATION ON THE APP “SMART LIFE”**

The “Smart Life” app is available for android and iOS.

Scan the corresponding QR code to get directly to the download.



<https://smartapp.tuya.com/smartlife>

### **INFORMATION ON HOW TO USE THE APP**

This appliance allows you to operate the appliance via your home net-work. A prerequisite is a permanent WIFI connection to your router and the free app “Smart Life”.

1. Install the “Smart Life” app. Create a user account.
2. Activate the WIFI function in the settings of your appliance.
3. Place the appliance at a distance of about 5 meters to your router.
4. If the power is turned on, the WIFI indicator flashes. After 3 minutes, the status will be canceled if there is no network configuration, and the indicator light is off. If you need

to re-connect the WIFI, long press the “timer” button for 5 Second to start the network configuration, the WIFI indicator flashes again.

## **WIFI CONNECTED**

### **Method 1**

Connected via Bluetooth

Open the bluetooth of your mobile phone or other device.

When WIFI indicator flashes, open “Smart Life” APP, the unit will connected via bluetooth automatically.

### **Method 2**

When WIFI indicator flashes, select “Add Device”-“Small Home Appliances”-“Dehumidifier”, and follow the instructions on the display.

Check the status of the WIFI indicator and choose the correct status.

If the WIFI indicator flash rapidly, it can connected directly.

If the WIFI indicator flash slowly, press “Go to Connect” to connect the WIFI named “SmartLife-XXXX”.

## **REMARKS:**

Once the appliance has been successfully connected, the WIFI lamp lights up. Now you can operate the appliance using the app.

Press and hold the Timer button for about 5 seconds, the appliance will disconnect and the Wi-Fi lamp lights will turn off.

## **FRONT THREE COLOR DIGITAL DISPLAY**

Ambient Humidity  $\leq$  45% The light show is Blue

45 Ambient Humidity 65% The light show is Green

Ambient Humidity  $\geq$  65% The light show is Red


## **DRENAGEM**

### **EMPTYING THE WATER TANK**

The water tank built in unit will fill up and shut the unit down once it is full. It will run again once you empty the water tank and installed properly.


- When the tank is full, The unit will make a buzzing sound, and the “Water Full” light will turn on.

- Press the POWER button to turn off the unit.
- Pull on the water tank and simply slide out of the body of the dehumidifier.
- Remove the water tank cover and empty the water into an area with a drain or outside.
- Clean the inside of the tank as well as the outside.
- Replace the empty tank back into the unit.
- Press the POWER button to resume operating.
- If the Water Full light does not extinguish, check that the float is correctly in place.

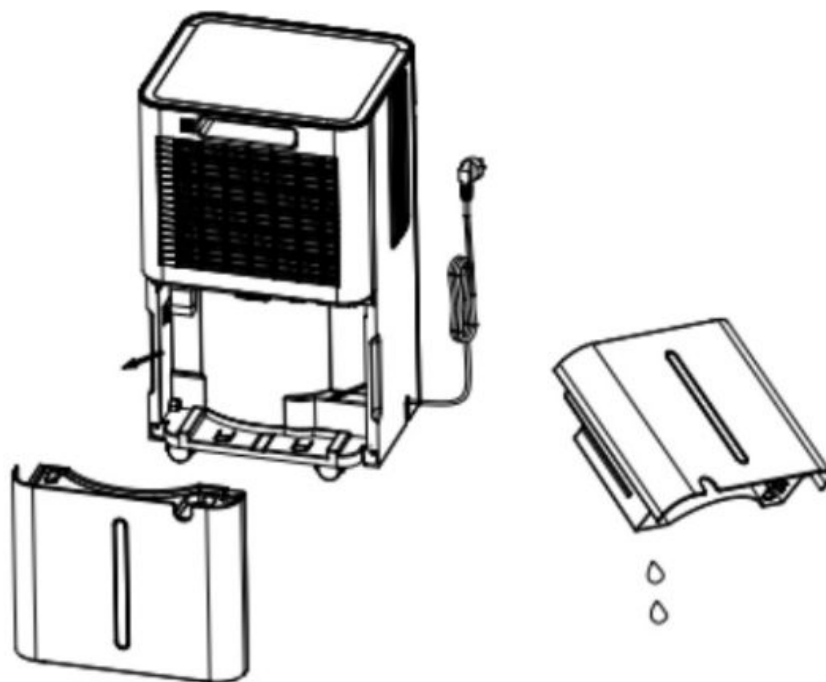

## Warning

1. Do not discard water tank magnets and plastic rivets. Otherwise, the machine will not automatically stop working when the water tank is full, and the condensed water will overflow and damage the floor of the room.

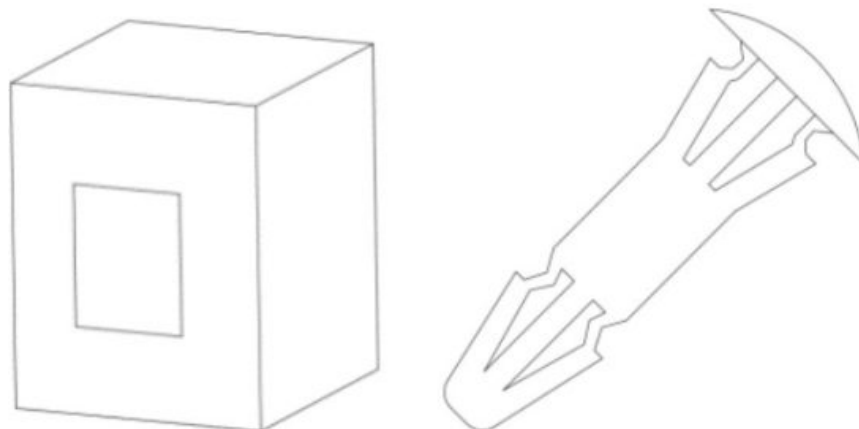

2. Please be sure to clean the condensed water in the water tank before resetting the


working mode of the machine.

3. If the water tank is dirty, rinse it with clean water. Avoid using detergents, steel balls, chemical dust removers, diesel oil, benzene, diluents or other solvents. Otherwise, the water tank will be damaged and leak.
4. Replace the empty tank back into the unit. Otherwise, the water full indicator may remain red and the machine cannot restart.

## CONTINUOUS DRAINING

For continuous operation or unattended dehumidification, please connect the attached drain hose to the unit. Condensate water can be automatically flow into a bucket or drain by gravity.

1. Straighten the drainage pipe.
2. Insert one end of the drain into the drain into the cistern hole and connect the other end to the bathroom, outdoor or bucket like container, or the prescribed drainage area.

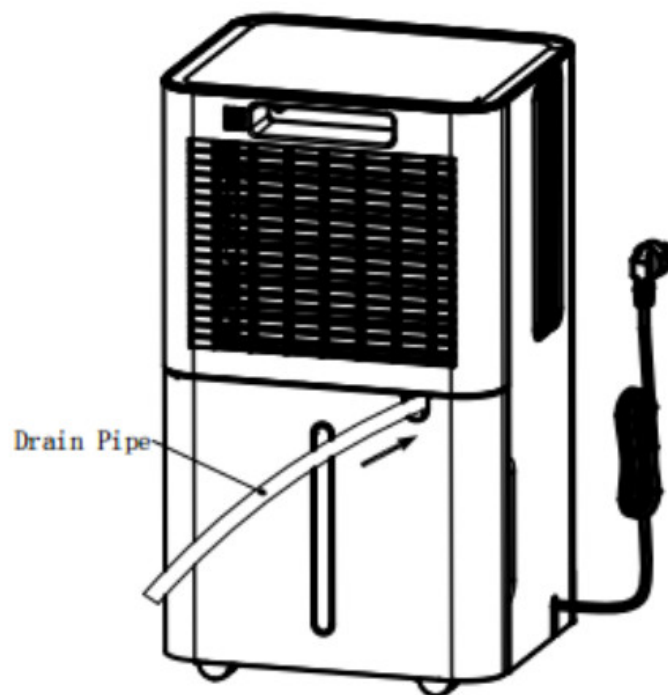

### Warning

1. Please do not block the drain or drain pipe, if the phenomenon of blocking, condensed water will flow into the water tank.
2. Please do not bend the drain pipe. The height of the drain pipe should be lower than the outlet.
3. The drain pipe shall be securely connected to the outlet;

## MAINTENANCE


**Note:** before cleaning and maintaining the machine, be sure to turn off the machine and pull the power plug to prevent electric shock.

### **CLEANING THE AIR FILTER (every two weeks)**

Dust collects on the filter and restricts the airflow. The restricted airflow reduces the efficiency of the system and if it becomes blocked it can cause damage to the unit.


The air filter requires regular cleaning. The air filter is removable for easy cleaning. Do not operate the unit without an air filter, or the evaporator may be contaminated.

1. Take the water tank from the body, and then pull out the filter from the bottom of the rear shell

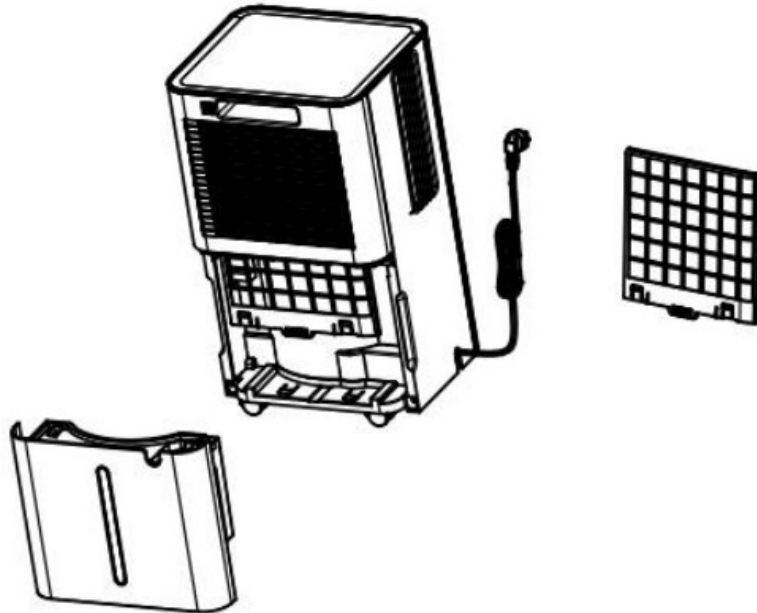


2. Use a vacuum cleaner to gently absorb the dust on the surface.

If the filter is very dirty, wash it with water and a soft detergent and dry it thoroughly afterwards.

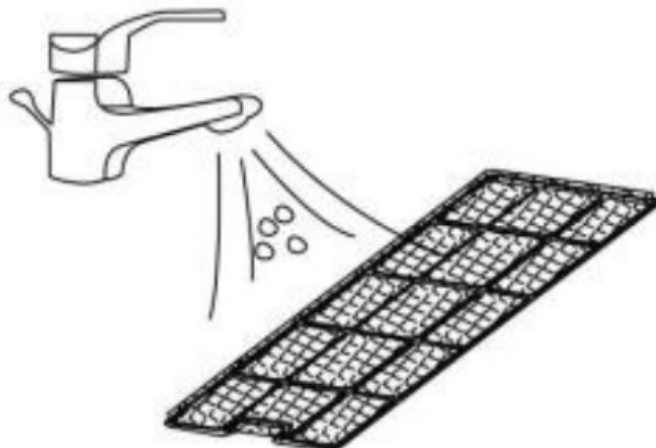

3. Put the filter back.



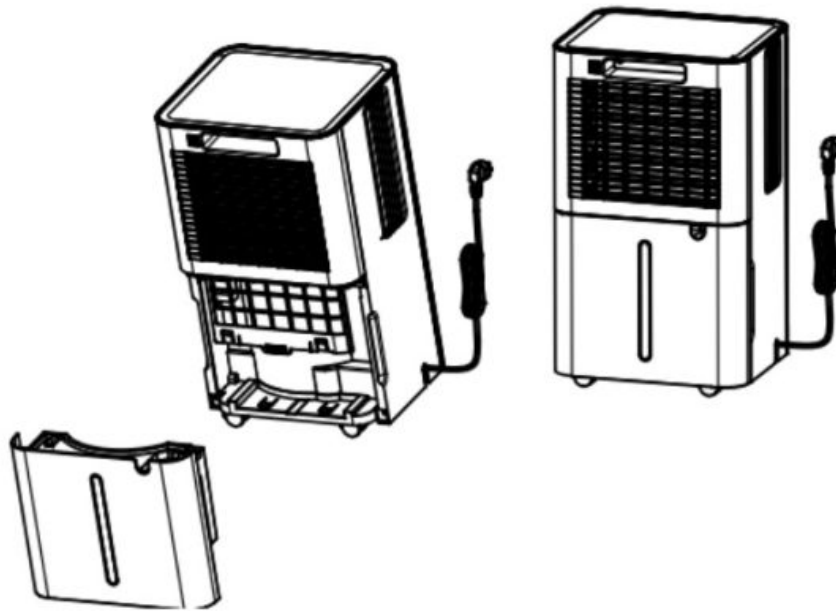

## TROUBLE SHOOTING

### FUNCTIONING TEMP.

$5^{\circ}\text{C} \leq \text{Ambient Temp.} \leq 35^{\circ}\text{C}$

When the ambient temp is lower or higher than the functioning temp, the dehumidifier stops.

When  $5^{\circ}\text{C} \leq \text{Ambient temp.} \leq 22^{\circ}\text{C}$ , the compressor automatically defrosts at intervals; during defrosting, the compressor stops and the fan keeps running.

### BEFORE CALLING FOR SERVICE

Before contacting professional service, please review the trouble shooting list that includes common occurrences that are not the result of a defect in workmanship or materials.

Problem	Possible Cause	Solution
Not working	No power supply	Connect to a functioning outlet and switch on
	Water Full Indication Flashes	Drain water tank and reset it, or re-position the water tank to right place
	Room temperature $< 5^{\circ}\text{C}$ , or $> 35^{\circ}\text{C}$	Self-Protection designed to protect the unit. Can not work under such temperature

Bad functioning	Is the air filter clogged?	Clean the air filter as instructed
	Is the intake duct or discharge duct obstructed?	Remove the obstruction from the discharge duct or intake duct.
No air intake	Is the filter clogged?	Wash the filter
Loud noise when running	Is the machine put in the flat place?	Put the machine on the flat ground
	Is the filter clogged?	Wash the filter
EI	Humidity sensor problem	Change a sensor
LO	Environmental humidity is below 20%	The dehumidifier shuts down for self-protection
CL	Low temperature protection, the environmental temperature <5°C	
CH	High temperature protection, the environmental temperature >38°C	

## DECOMMISSIONING

### STORAGE

Long-term storage – If you will not be using the unit for an extended period of time (more than a few weeks) it is best to clean the unit and dry it out completely. Please store the unit per the following steps:

1. Press power button to switch off and unplug the unit.
2. Drain the remaining water from the unit.
3. Clean the filter and let the filter dry completely in a shaded area.
4. Collect the power cord at the water tank.

5. Re-install the filter at its position.
6. The unit must be kept in upright position when in storage.
7. Preserving the machine in ventilating, dry, non- corrosive gas and safe place indoor.

### **ATTENTION:**

The evaporator inside the machine has to be dried out before the unit is packed to avoid component damage and molds. Unplug the unit and place it in a dry open area for days to dry it out.

### **DISPOSAL**

### **WARNING!!!**

Releasing refrigerant into atmosphere is strictly forbidden!



Do not dispose of electrical appliances as unsorted municipal waste, use separate collection facilities. Contact your local government for information regarding the collection systems available. If electrical appliances are disposed of in landfills or dumps, hazardous substances can leak into the groundwater and get into the food chain, damaging your health and well-being.

### **GENERAL WARRANTY TERMS**

1. The warranty is valid only on presentation of invoice of purchase.
2. This WARRANTY is limited exclusively to parts substitution ineffective due to faulty manufacture, made in our workshops.
3. The elimination of several faults of the scope of the guarantee is made for repair or replacement of defective parts, according to the discretion of our technical services. Defective parts are our property.
4. Are not covered under warranty damage caused by transportation, neglect or poor use, improper assembly or installation, as well as external influences such as: lightning strikes or power, flooding, humidity, etc.
5. Lose warranty, all appliances that are not being used according to the instructions or connected to FEEDING NETWORKS not guarantee a constant voltage of 220/240V.
6. The warranty does not cover damages for personal injury or damage caused directly or indirectly in any capacity whatsoever.
7. This warranty terminates when it is found to have been undergoing repairs, alterations

or interventions by any person not authorized by Jocel.

## THE WARRANTY EXPIRES

1. If the appliance has not been installed by an Accredited Technician.
2. Exceeded the period for home appliances and for industrial appliances, warranty expires and assistance will be made by charging the costs of manpower, according to current fees.
3. With the modification or disappearance of the nameplate of the appliance.

**NOTE: GLASSES AND LAMPS ARE NOT COVERED BY WARRANT.**

## TECHNICAL ASSISTANCE

For technical assistance request, our services are available through the following contacts:

Telef. 00 351 252 910351

Fax: 00 351 252 910367

E-mail: [assistencia@jocel.pt](mailto:assistencia@jocel.pt)

<http://www.jocel.pt>

## DECLARATION OF CONFORMITY



We declare on our own responsibility that the machine indicated below

Product DEHUMIDIFIER

Brand JOCEL

Model JDE001405

Complies with the following European directives and standards implementation:

Low Voltage	2014/35/EU	EN 60335-2-40:2003+A11+A12 +A1+A2+A1 3 EN 60335-1:2012+A11+A13+A1 +A14+A2+A 15 EN 62233:2008
-------------	------------	--

Electromagnetic Compatibility	2014/30/EU	EN 300328:2019 EN 301489-1:2019 EN 301489-17:2020 EN IEC 62311:2020 EN IEC 55014-1:2021 EN IEC 55014-2:2021 EN 61000-3-3:2013+A1+A2 EN IEC 61000-3-2:2019+A1
-------------------------------	------------	---

MADE P.R.C.



**HEADQUARTERS:**

**Rua Alto do Curro, n.º 280**

**4770-569 S. COSME DO VALE**

**V.N. de FAMALICÃO**

**Telef: 252 910 350/2**

**Fax: 252 910 368/9**

**email: [jocel@jocel.pt](mailto:jocel@jocel.pt)**

**<http://www.jocel.pt>**

## Documents / Resources

	<p><a href="#">JOCEL JDE001405 Dehumidifier [pdf]</a> Instruction Manual</p> <p>JDE001405, JDE001405 Dehumidifier, JDE001405, Dehumidifier</p>
--	--

## References

- [JOCEL Electrodomésticos](#)
- [JOCEL Electrodomésticos](#)
- [JOCEL Electrodomésticos](#)
- [User Manual](#)

—Previous Post

## JOCEL JDE002167 Dehumidifier Instruction Manual

### Leave a comment

Your email address will not be published. Required fields are marked \*

Comment \*

Name

Email

Website

☐ Save my name, email, and website in this browser for the next time I comment.

**Post Comment**

**Search:**

**Search**

[Manuals+](#) | [Upload](#) | [Deep Search](#) | [Privacy Policy](#) | [@manuals.plus](#) | [YouTube](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.