

Jandy h0621300 White LED Lights



JUNG DALI 2 Power Push Button Controller TW Instruction Manual

[Home](#) » [JUNG](#) » JUNG DALI 2 Power Push Button Controller TW Instruction Manual 

Contents

- [1 JUNG DALI 2 Power Push Button Controller TW](#)
- [2 Product Information](#)
- [3 Product Usage Instructions](#)
- [4 Electrical installation for DALI 2 systems](#)
- [5 FAQ](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)

JUNG

JUNG DALI 2 Power Push Button Controller TW



Product Information

Specifications

- DALI Standard: DALI 2
- Communication: Digital control approach using a two-wire cable
- Compatibility: Worldwide standard supported by many countries and organizations
- Functionality: Stepless dimming of LED luminaires, individual control of lighting

Product Usage Instructions

Electrical Installation for DALI 2 Systems

DALI 2 is the latest version of the DALI standard, offering improved compatibility and extended functionality compared to its predecessor. It provides higher flexibility, energy efficiency, and improved user convenience when controlling lighting systems.

Control Unit Solutions from JUNG

JUNG offers a comprehensive product portfolio for controlling DALI 2. From electronic DALI 2 rotary controllers to integration into smart-home systems, JUNG provides solutions for every control unit.

Rotary Controllers

JUNG DALI rotary controllers allow users to control luminaires with the DALI 2 interface and ballasts, including Tunable White. The operation is done via the JUNG centre plate with a knob.

Power DALI Push-Button Controller

The Power DALI push-button controller enables smart lighting control, saving energy and adapting lighting to residents' needs.

Energy Efficiency with DALI 2

DALI 2 is used in homes and apartments to control lighting and save energy. LED luminaires compatible with DALI 2 can be installed to adjust lighting to residents' needs, avoiding unnecessary energy consumption.

One of the main functions of DALI 2 is the stepless dimming of LED luminaires, allowing brightness adjustment based on user requirements to save energy.

Electrical installation for DALI 2 systems

DALI 2 is the latest version of the DALI standard and offers improved compatibility and extended functionality compared to its predecessor



This includes higher flexibility, energy efficiency and improved user convenience when controlling lighting systems. JUNG provides the appropriate electrical installation for the operation of DALI 2.

DALI uses a digital control approach whereby the communication between devices takes place with a special bus system (a two-wire cable). In this way, it is possible for every luminaire or lighting group to be controlled individually and to adapt the lighting to the individual requirements.

DALI 2 is a worldwide standard supported by many countries and organisations. This allows a higher level of compatibility and interoperability between different products and systems. Whereas with DALI the functionality and interoperability between devices were often limited, DALI 2 makes combining devices from different manufacturers easier. Furthermore, DALI 2 is backwards compatible with DALI. This makes a migration to the new version easier. The comprehensive product portfolio for controlling DALI 2

DALI 2 is the latest version of the DALI standard and offers improved compatibility and extended functionality compared to its predecessor. JUNG offers the right solution for every control unit. From electronic DALI 2 rotary controllers to integration into different smart-home systems: with a coordinated selection of system inserts and centre plates, JUNG also handles the control of DALI 2.

Manually in no time: rotary controllers with and without DALI power supply

With the single-channel JUNG DALI rotary controller TW system insert, users can control luminaires with the DALI 2 interface as well as DALI 2 ballasts, including Tunable White. The operation is carried out via the JUNG centre

plate with a knob. The Power DALI rotary controller TW additionally supplies up to 28 DALI devices with voltage. Both flush-mounted inserts are suitable for installation in standard wall boxes manufactured to DIN 49073.


Smart at the press of a button power DALI push-button controller TW

The JUNG power DALI controller TW is suitable for the manual operation of luminaires with a DALI interface. The operation follows the usual principles. In addition, users can set the colour temperature (Tunable White). Numerous solutions from JUNG are suitable as centre plates. A simple push-button from the familiar LB Management is sufficient for manual operation. If it needs to be smart, a push-button with a 2-gang assignment from the new smart home system, JUNG HOME, is sufficient. But even a motion detector for control according to light or motion, or integration into a KNX system with a JUNG KNX RF push-button is no problem. If beyond that an owner wants even more convenience, or it concerns a large system, they can choose the JUNG KNX DALI gateway TW. It controls up to 64 DALI devices in up to 32 groups. In addition, the gateway allows the colour temperature to be set for luminaires with DALI Device Type 8 for Tunable White by IEC 62386-209.



Smart lighting saves energy

DALI 2 is used in individual homes and apartments to control the lighting and save energy. For example, DALI 2 compatible LED luminaires can be installed in living areas to adapt the lighting to the needs of the residents. The precise control of the lighting means that unnecessary energy consumption can be avoided Dimming: one of the main functions of DALI 2 is the stepless dimming of LED luminaires. Adapting the brightness to the actual requirements of the users avoids unnecessary energy consumption.

DALI 2 is the latest version of the DALI standard and offers improved compatibility and extended functionality compared to its predecessor Presence and motion detection: DALI 2 supports presence and motion detection so that the lighting switches on and off automatically when people move in a room or leave it. In this way, DALI 2 ensures that the light is only on when it is needed.

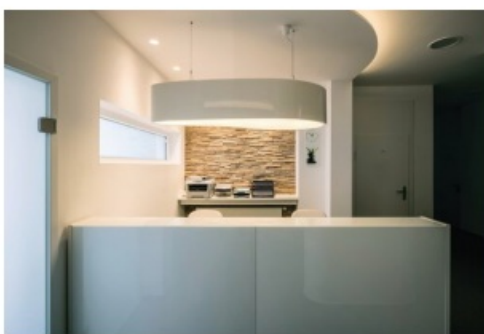

DALI 2 is the latest version of the DALI standard and offers improved compatibility and extended functionality compared to its predecessor

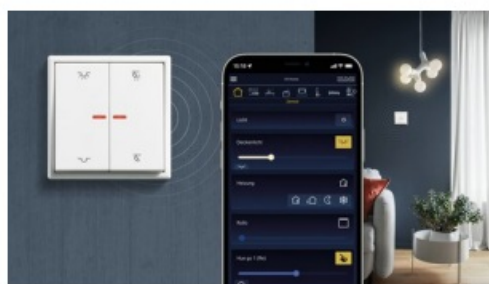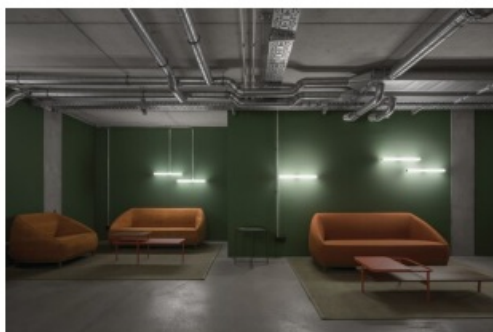

Contact:

press.pdf.label.officepress.pdf.label.footerAgentur Richter
Mail: redaktion@agentur-richter.de

FAQ


Q: Is DALI 2 compatible with devices from different manufacturers?

A: Yes, DALI 2 allows for higher compatibility and interoperability between different products and systems, making it easier to combine devices from various manufacturers.



Q: Can DALI 2 be used for dimming LED luminaires?

A: Yes, one of the main functions of DALI 2 is the stepless dimming of LED luminaires, helping to adapt brightness to users' needs and reduce energy consumption.

Documents / Resources

	<p>JUNG DALI 2 Power Push Button Controller TW [pdf] Instruction Manual</p> <p>DALI 2 Power Push Button Controller TW, DALI 2, Power Push Button Controller TW, Push Button Controller TW, Button Controller TW, Controller TW</p>
---	---

References

-  [Bernd Richter - Software für Kälte und Klima](#)
-  [TCPDF](#)
- [User Manual](#)

[Manuals+](#), [Privacy Policy](#)

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.