Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Muvai MUVAI (B0FHGG93Q6)

Muvai 59-Inch L-Shaped Electric Standing Desk User Manual

Model: MUVAI (B0FHGG93Q6)

Brand: Muvai

1. Introduction

Thank you for choosing the Muvai 59-inch L-Shaped Electric Standing Desk. This manual provides essential information for the safe assembly, operation, and maintenance of your new desk. Please read this manual thoroughly before installation and keep it for future reference.

This electric standing desk features an adjustable height mechanism, a reversible L-shaped desktop, and an integrated cable management tray, designed to enhance your workspace ergonomics and organization.

2. Safety Information

- Always assemble the desk according to the provided instructions.
- Do not exceed the maximum weight capacity of**176 lbs (80 kg)**. Overloading can cause damage and injury.
- Ensure all screws and bolts are securely tightened before use. Periodically check and re-tighten as necessary.
- Keep children and pets away from the desk during height adjustments to prevent accidents.
- Be cautious when adjusting the desk height to avoid pinching hands or objects.
- Place the desk on a level surface to ensure stability.
- Do not sit or stand on the desk.
- Disconnect power before cleaning or performing any maintenance.
- Only use the provided power adapter.

3. Package Contents

Please verify that all components are present and undamaged before beginning assembly. If any parts are missing or

damaged, contact customer support.

- Desktop Panels (3 sections)
- Desk Frame Components (Legs, Crossbars, Motor, Control Box)
- Control Panel with Digital Display
- Cable Management Tray
- Cup Holder
- Headphone Hook
- Adjustable Foot Pads
- All necessary screws, bolts, and assembly tools (Allen wrenches)
- Power Adapter and Cable

4. Assembly Instructions

Assembly typically takes 30-59 minutes. It is recommended that**two people** assemble this desk. A Phillips screwdriver or drill (not provided) may be required in addition to the included tools.

4.1 Pre-Installation Guide

- Assemble on a soft surface (e.g., foam, carpet) to prevent scratches.
- Ensure you have a Phillips screwdriver or drill (not provided).
- It is recommended to have a friend assist with assembly.

4.2 Step-by-Step Assembly

Refer to the detailed installation video below for a visual guide. The desk can be assembled as either a left or right L-shaped configuration.

Your browser does not support the video tag.

Official installation guide video for the Muvai L-shaped standing desk, demonstrating step-by-step assembly instructions.

1. **Assemble the Desk Frame:** Attach the side brackets and feet to the main crossbar using the provided M6*12 screws. Ensure the adjustable foot pads are installed.
2. **Connect the Drive Rod:** Insert the drive rod into the motor and the opposite leg mechanism. Secure it with the provided fasteners.
3. **Assemble the Desktop:** Join the three desktop panels using the wooden dowels and secure them with the ST5*16 screws and metal plates. You can choose to configure it as a left or right L-shape.
4. **Attach Desktop to Frame:** Carefully place the assembled desktop onto the desk frame. Align the pre-drilled holes and secure the desktop to the frame using the ST5*16 screws.
5. **Install Accessories:** Attach the cable management tray, cup holder, and headphone hook to the underside of the desk using the ST5*16 screws.
6. **Connect Electronics:** Connect the control panel and motor cables to the control box. Plug the power adapter into the control box and then into a power outlet.

Diagram showing the dimensions of the Muvai 59-inch L-shaped standing desk, including width, depth, and adjustable height range.

Sturdy SPCC Steel Construction

Industrial SPCC steel frame makes the desk more stable

- **Load Capacity** 176LBS
- **Low Noise** <45db
- **Height Adjustable Range** 28.3"- 46.4"

Illustration of the sturdy SPCC steel construction of the Muvai desk frame, highlighting its 176lbs load capacity, low noise, and height adjustable range.

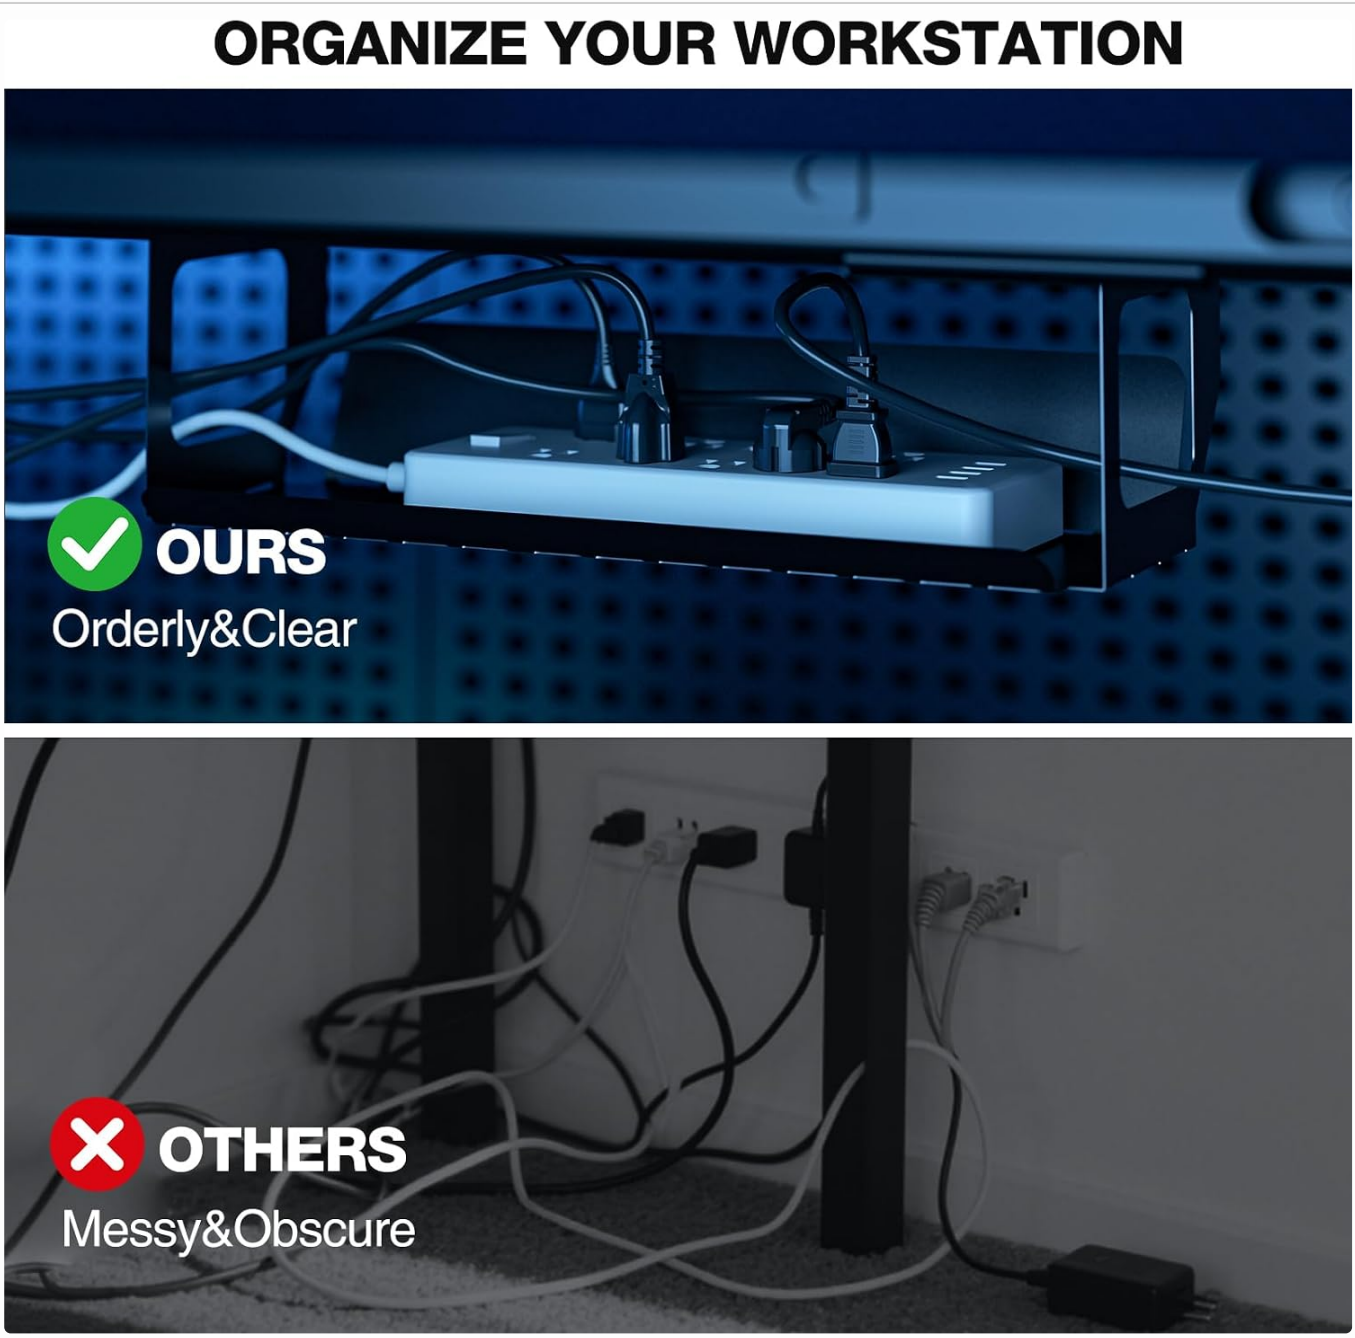

Comparison image highlighting the integrated cable management tray of the Muvai desk versus a desk without cable management, showing organized versus tangled wires.

Image showcasing included accessories: cable management, cup holder, and headphone hook.

5. Operating Instructions

5.1 Control Panel Overview

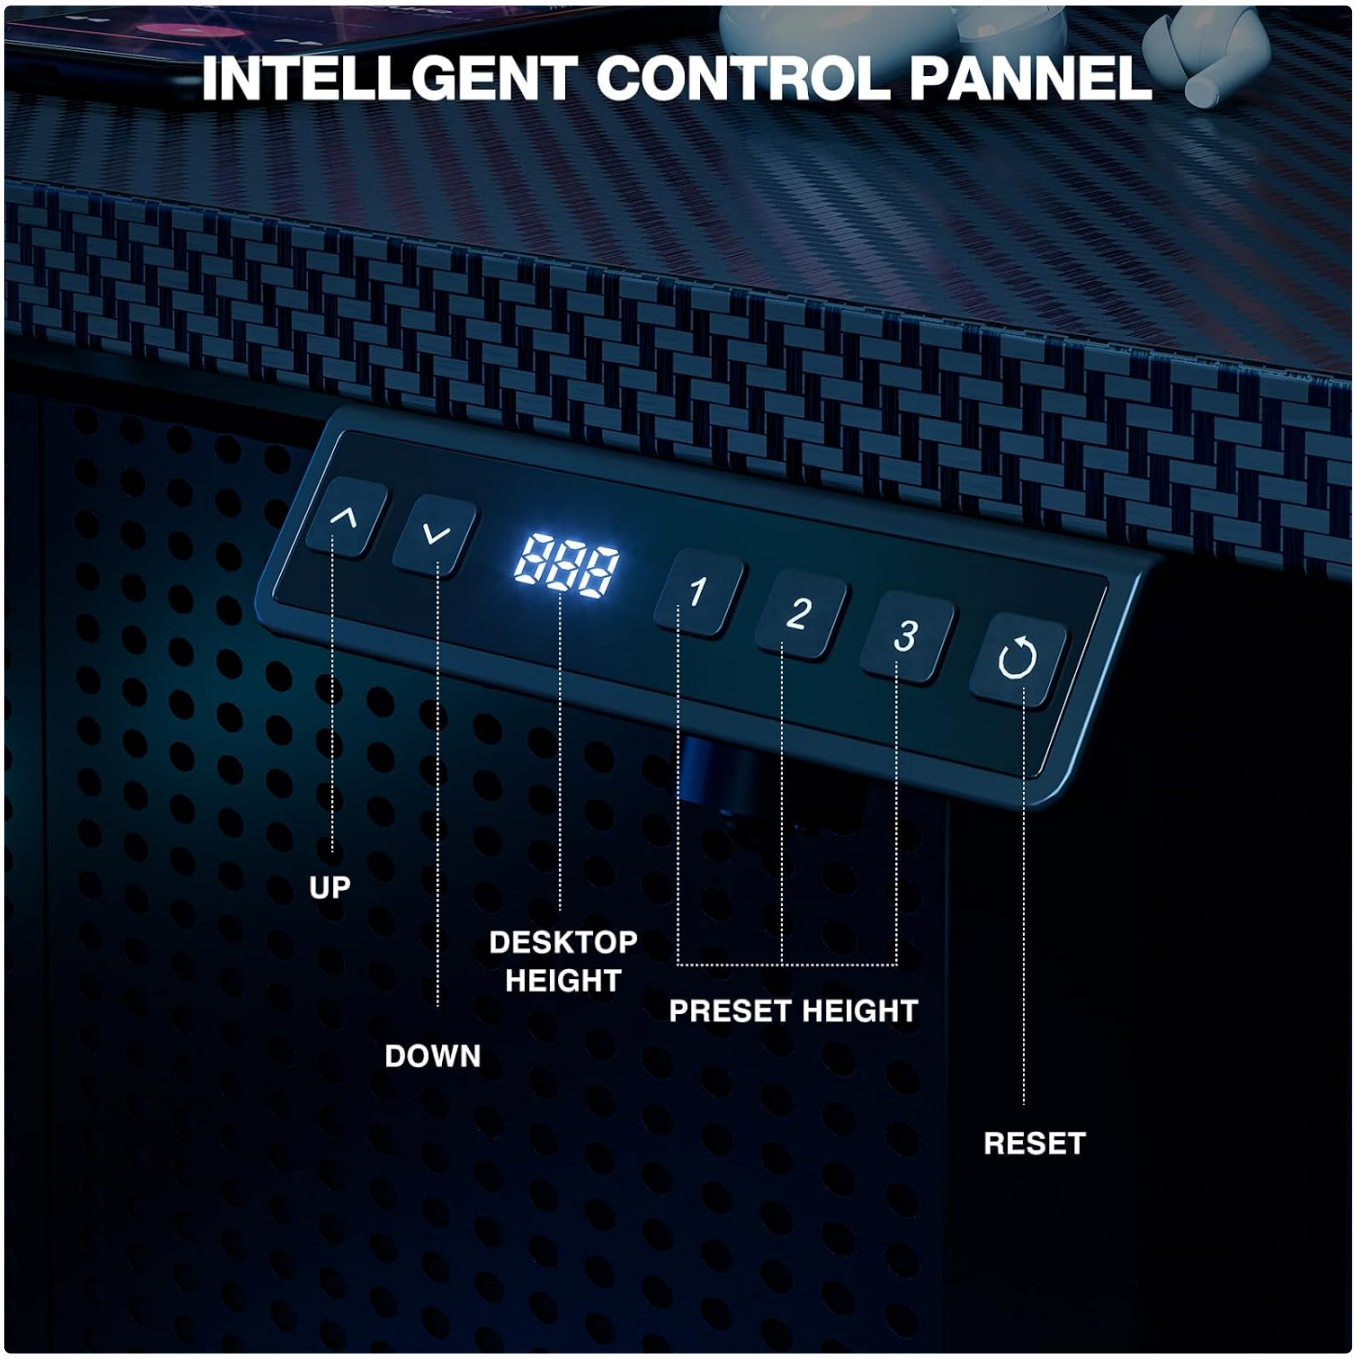

Close-up of the intelligent control panel on the Muvai standing desk, showing up/down arrows, digital height display, and three memory preset buttons.

- **Up/Down Arrows (▲ / ▼):** Press and hold to adjust the desk height up or down. Release to stop at the desired height.
- **Digital Display:** Shows the current desk height in inches.
- **Memory Presets (1, 2, 3):** Store and recall preferred desk heights.
- **Reset Button (↺):** Used for initial setup and troubleshooting.

5.2 Setting Memory Presets

1. Adjust the desk to your desired height using the up/down arrows.
2. Press one of the memory preset buttons (1, 2, or 3) for 3 seconds until the display flashes or beeps. The current

height is now saved to that preset.
3. To recall a saved height, simply press the corresponding memory preset button (1, 2, or 3). The desk will automatically move to the saved position.

5.3 Initial Reset Procedure

Before first use or after a power interruption, perform a reset:

1. Long press the **Reset button (↺)** for 3 seconds.
2. Wait for the display to flash "---". Release the button.
3. The desktop will automatically run down to its lowest position and then rebound 3-5mm. This indicates the reset program has completed.

Image showing the reset button on the control panel and instructions for performing a reset.

6. Maintenance

- **Cleaning:** Wipe the desk surface with a dry cloth. For stubborn marks, use a slightly damp cloth with mild soap, then dry immediately. Avoid harsh chemicals or abrasive cleaners.
- **Cable Management:** Periodically check the cable management tray to ensure cables are neatly organized and not pinched or damaged.
- **Fasteners:** Regularly inspect all screws and bolts to ensure they remain tight. Re-tighten if necessary.
- **Motor:** The motor is designed for maintenance-free operation. Do not attempt to lubricate or disassemble the motor or lifting columns.

7. Troubleshooting

If you encounter any issues, please refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Desk does not move.	Power cable disconnected; Control panel cable loose; Overload.	Check all cable connections. Ensure desk is not overloaded (max 176 lbs). Perform a reset.
Desk moves unevenly or stops.	Obstruction; Uneven weight distribution; Drive rod issue.	Remove any obstructions. Redistribute weight evenly. Perform a reset. If issue persists, check drive rod connection.
Display shows an error code.	System error.	Perform a reset. If the error code persists, contact customer support with the specific code.
Desk makes unusual noise.	Loose fasteners; Obstruction.	Check and tighten all fasteners. Ensure no objects are interfering with the lifting mechanism.

If troubleshooting steps do not resolve the issue, please contact Muvai customer support.

8. Specifications

Feature	Detail
Brand	Muvai
Model Number	MUVAI (B0FHGG93Q6)
Shape	L-Shape (Reversible)
Product Dimensions (D x W x H)	40"D x 59"W x 28.3"-46.4"H
Color	Black Carbon
Base Material	Alloy Steel (Industrial-grade SPCC steel frame)
Top Material Type	Wood (Scratch-resistant, Waterproof, Easy to Clean)
Tabletop Thickness	0.6 Inches
Minimum Height	28.3 Inches
Maximum Height	46.4 Inches
Lifting Mechanism	Electric
Noise Level	Under 45dB
Number of Height Presets	3
Maximum Weight Capacity	176 Pounds (80 kg)
Item Weight	66 Pounds
Included Components	Adjustable Foot Pad, Cable Management Tray, Cup Holder, Headphone Hook
Recommended Assembly Persons	2
Product Care Instructions	Wipe with Dry Cloth

9. Warranty and Support

The Muvai 59-inch L-Shaped Electric Standing Desk comes with a**Limited Warranty**. Please refer to the warranty card included in your package for specific terms and conditions.
For technical support, missing parts, or warranty claims, please contact Muvai customer service through the retailer where you purchased the product or visit the official Muvai website.

© 2026 Muvai. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B0FHGG93Q6

More documents and user manuals: **https://manuals.plus/**