



Manuals.plus /

› VEGER /

› VEGER V1202 Portable Charger User Manual

## VEGER V1202

# VEGER V1202 Portable Charger User Manual

Model: V1202 | Brand: VEGER

## 1. INTRODUCTION

---

Thank you for choosing the VEGER V1202 Portable Charger. This ultra-slim 10000mAh power bank is designed for convenience and fast charging, featuring built-in USB-C and iOS-compatible cables. Please read this manual carefully to ensure proper use and optimal performance of your device.

# Light and Slim

11.6\*7.2\*1.68cm



Image: The VEGER V1202 Portable Charger, showcasing its compact design and integrated charging cables.

## 2. SAFETY INFORMATION

To prevent damage, injury, or malfunction, please observe the following safety guidelines:

- Keep the product away from fire sources and high temperatures. Do not expose it to direct sunlight, heaters, microwaves, ovens, or candles.
- Avoid contact with water or other liquids. Do not immerse the product.
- Charge the power bank using a charger with the corresponding power rating. Avoid incompatible chargers with excessively high power ratings.
- Do not drop, crush, or pierce the device. Avoid major external pressure to prevent deformation, internal short circuits, and overheating.

- This device contains a Lithium Polymer battery. Do not disassemble or attempt to repair it yourself.
- Keep out of reach of children.

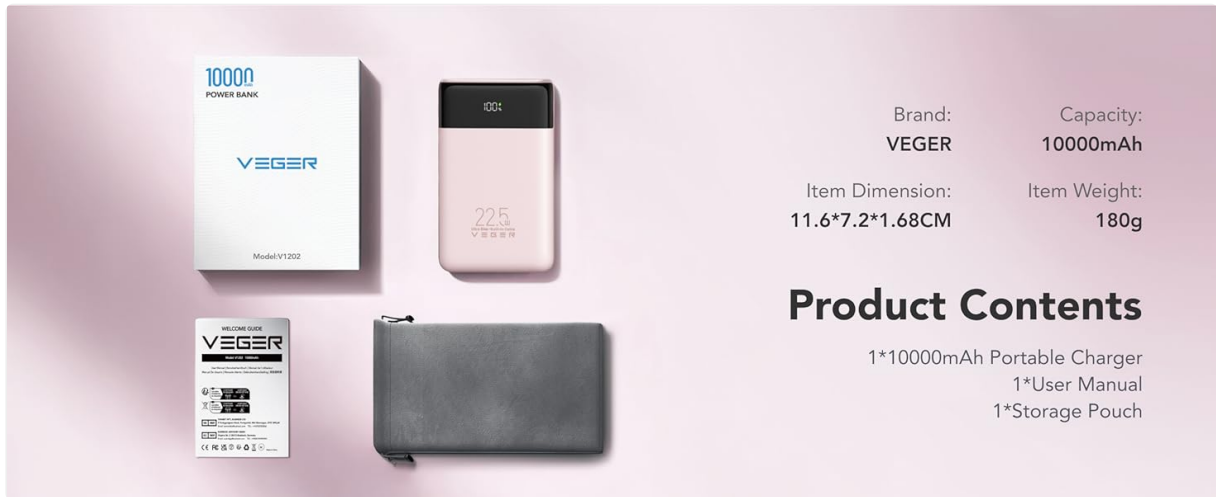


Image: Visual representation of safety tips, including avoiding fire, water, incorrect chargers, and physical damage.

### 3. PRODUCT OVERVIEW

The VEGER V1202 Portable Charger is designed for maximum convenience and efficiency. Key features include:

- **Ultra-Compact & Slim Design:** Measuring 11.6 x 7.2 x 1.68 cm and weighing 180g, it fits easily into pockets or bags.
- **Built-in Cables:** Features integrated USB-C and iOS-compatible cables for direct charging without extra accessories. The USB-C cable supports both charging and recharging.
- **22.5W PD Fast Charging:** Delivers rapid power, charging compatible devices up to 50% in approximately 30 minutes.
- **Multi-Device Charging:** Capable of charging up to four devices simultaneously using the two built-in cables and two additional ports (USB-C and USB-A).
- **Digital Display:** A clear LED digital display shows the exact remaining power percentage.
- **10000mAh Capacity:** Provides sufficient power for multiple full charges of smartphones and other small devices.
- **Airline-Approved:** Meets carry-on requirements for air travel.



Image: The portable charger highlighting its compact and slim dimensions.

**10000mAh  
Portable Charger  
with Built-in Cables**



Image: The power bank with its built-in cables, emphasizing a clutter-free charging experience.

## 4. SETUP AND CHARGING THE POWER BANK

Before first use, fully charge your VEGER V1202 Portable Charger.

### 4.1 Recharging the Power Bank (3 Ways)

1. **Using the Built-in USB-C Cable:** Connect the built-in USB-C cable to a compatible USB-C wall adapter (not included).
2. **Using the USB-C Input Port:** Connect a USB-C cable (not included) to the power bank's dedicated USB-C input port and to a compatible USB-C wall adapter.
3. **Using the iOS-Compatible Input Port:** Connect an iOS-compatible cable (not included) to the power bank's dedicated iOS-compatible input port and to a compatible wall adapter.

The digital display will show the charging progress. When it reaches 100%, the power bank is fully charged.

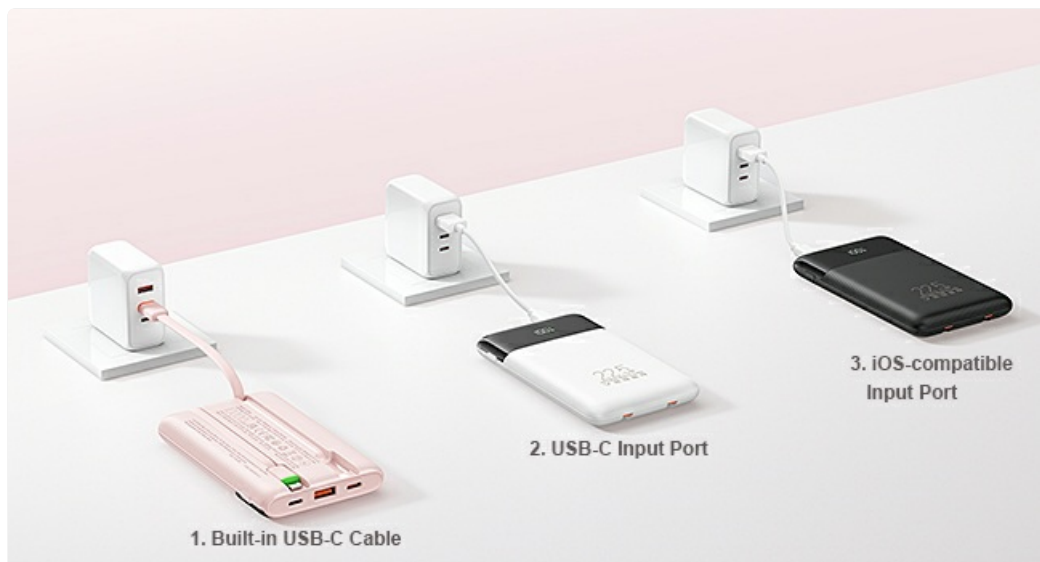


Image: Illustration of the three methods to recharge the power bank: via built-in USB-C cable, USB-C input port, and iOS-compatible input port.

## 5. OPERATING INSTRUCTIONS

### 5.1 Charging Your Devices

The VEGER V1202 can charge up to four devices simultaneously.

### 1. Using Built-in Cables:

- For USB-C devices: Connect the built-in USB-C cable directly to your device.
- For iOS devices: Connect the built-in iOS-compatible cable directly to your device.

### 2. Using Additional Ports:

- For USB-C devices: Use your own USB-C to USB-C cable to connect your device to the power bank's USB-C output port.
- For USB-A devices: Use your own USB-A to compatible cable to connect your device to the power bank's USB-A output port.

The digital display will show the remaining battery percentage of the power bank. Fast charging (22.5W PD) is active when charging a single compatible device.




Image: The power bank simultaneously charging a tablet, two smartphones, and wireless earbuds.

## 5.2 Digital Display

The integrated LED digital display provides real-time battery percentage, allowing you to monitor the power bank's charge level accurately.

# Ergonomic Grip

Say goodbye to hand cramps!

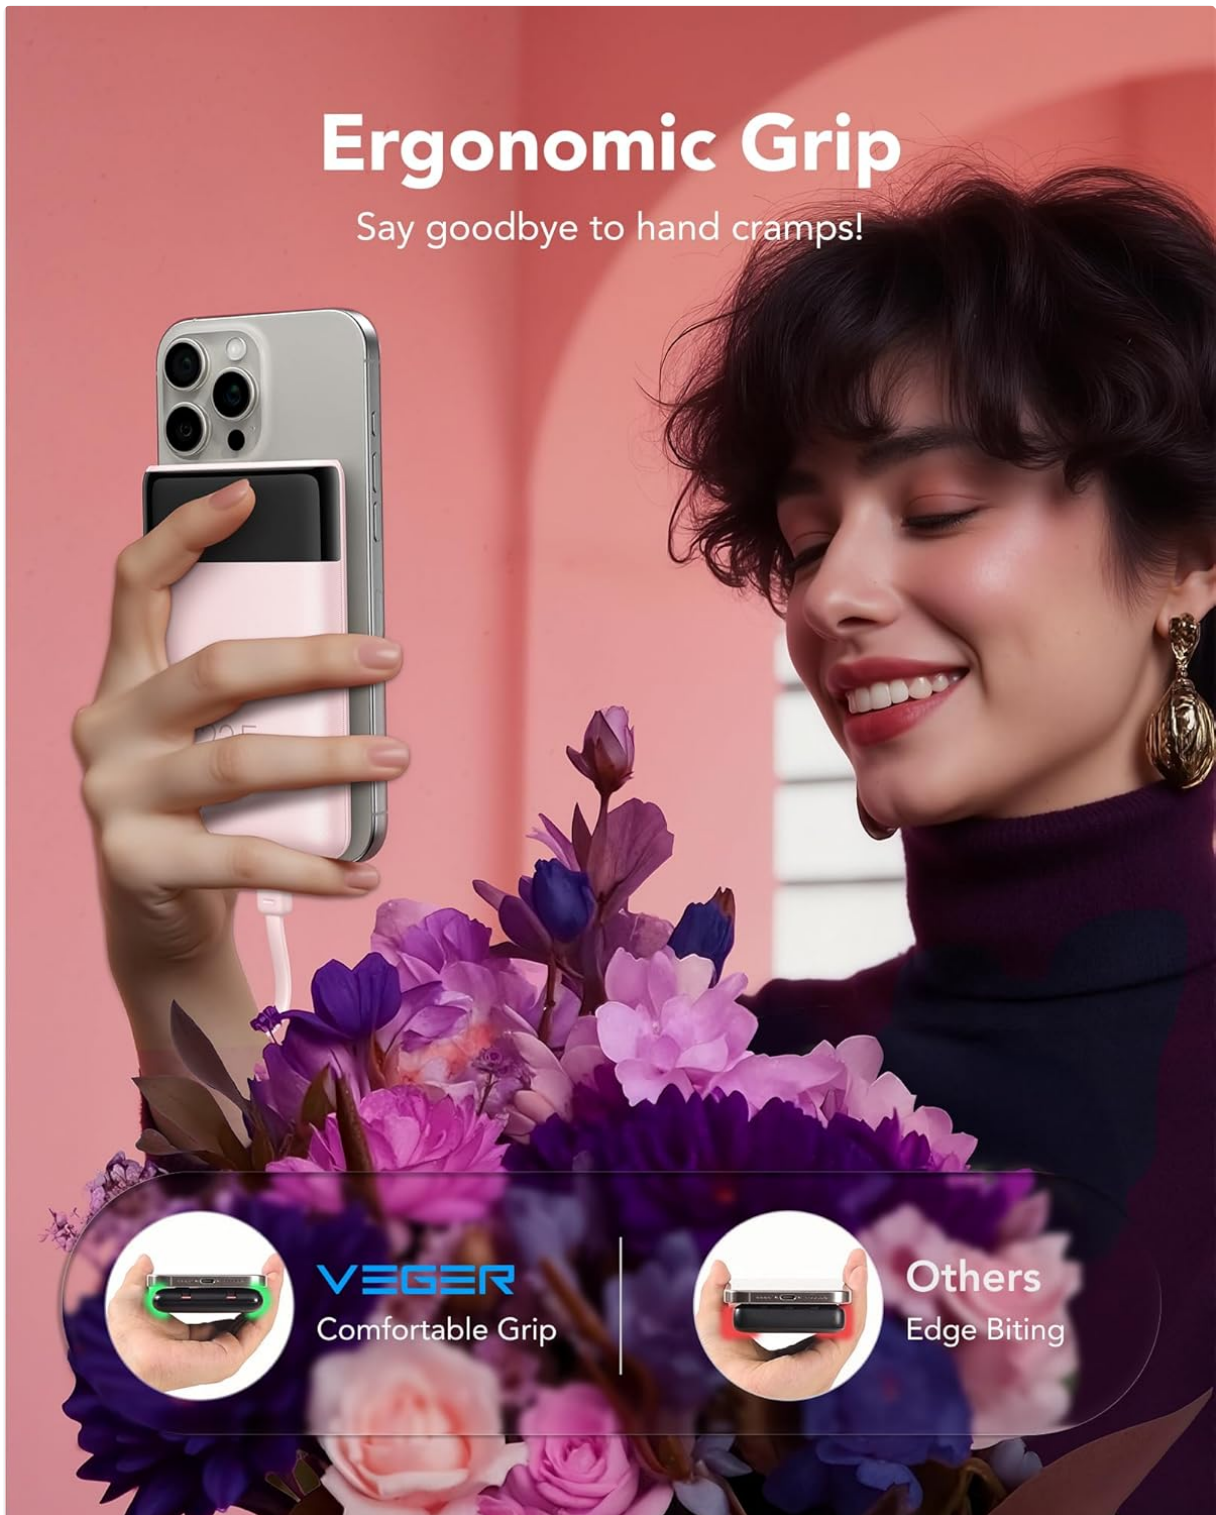

**VEGER**  
Comfortable Grip



**Others**  
Edge Biting

Image: A close-up view of the power bank's digital display, indicating a full charge.

## 6. MAINTENANCE AND CARE

- Clean the power bank with a soft, dry cloth. Do not use harsh chemicals or abrasive materials.
- Store the device in a cool, dry place away from direct sunlight and extreme temperatures.
- If not used for extended periods, charge the power bank at least once every three months to maintain battery health.
- Avoid overcharging or completely draining the battery frequently to prolong its lifespan.

## 7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Power bank not charging	Cable not properly connected. Charging adapter is faulty or incompatible. Power bank battery is completely drained.	Ensure all cables are securely connected. Try a different charging cable or wall adapter. Allow the power bank to charge for a longer period, even if the display doesn't immediately light up.
Device not charging from power bank	Power bank is out of charge. Charging cable is faulty or incompatible. Device is not compatible.	Recharge the power bank. Try a different charging cable. Verify device compatibility with the power bank's output specifications.
Slow charging	Multiple devices charging simultaneously. Device does not support fast charging. Cable or adapter used for recharging is not fast-charge compatible.	For fastest charging, charge one device at a time. Ensure your device supports 22.5W PD fast charging. Use a fast-charging compatible wall adapter and cable for recharging the power bank.

If the problem persists, please contact customer support.

## 8. SPECIFICATIONS

Feature	Detail
Model Number	V1202
Brand	VEGER
Battery Capacity	10000mAh
Battery Type	Lithium Polymer
Fast Charging Output	22.5W Power Delivery (PD)
Input Ports	Built-in USB-C cable, USB-C port, iOS-compatible port
Output Ports	Built-in USB-C cable, Built-in iOS-compatible cable, USB-C port, USB-A port
Dimensions (L x W x T)	11.6 x 7.2 x 1.7 cm
Weight	180 Grams
Recommended Uses	Travel, Camping, Daily use

**Built-In • Clutter-Free**



Image: Overview of product contents and key specifications.

## 9. WARRANTY AND SUPPORT

The VEGER V1202 Portable Charger comes with a **2-year warranty** from the date of purchase. This warranty covers manufacturing defects and ensures reliable performance under normal use.

For warranty claims, technical support, or any inquiries, please contact VEGER customer service:

- **Email:** [hello@vegerpower.com](mailto:hello@vegerpower.com)
- Please provide your model number (V1202) and proof of purchase when contacting support.

## 10. PRODUCT VIDEO

Watch this official product video for a visual guide on the VEGER V1202 Portable Charger's features and usage.

Your browser does not support the video tag.

Video: A short overview demonstrating the VEGER V1202 Portable Charger's compact size, built-in cables, and multi-device charging capabilities.