

ZEALOT S76

ZEALOT P11 Bluetooth Speaker (Model S76) Instruction Manual

Your Guide to Optimal Audio Experience

INTRODUCTION

Thank you for choosing the ZEALOT P11 Bluetooth Speaker. This manual provides essential information for setting up, operating, and maintaining your speaker. Please read it thoroughly to ensure optimal performance and longevity of your device.



Image: The ZEALOT P11 Bluetooth Speaker, black with an orange handle, shown with water splashing, demonstrating its IPX6 waterproof rating.

WHAT'S IN THE BOX

- ZEALOT P11 Bluetooth Speaker
- USB Charging Cable
- User Manual (this document)



Image: The ZEALOT P11 speaker, its packaging, and included accessories like USB cables and the user manual.

SETUP

1. Charging the Speaker

Before first use, fully charge the speaker. Connect the provided USB cable to the speaker's charging port and a compatible USB power adapter (not included). The charging indicator light will show the charging status. A full charge provides up to 20 hours of continuous playtime at 50% volume.

2. Powering On/Off

- To power on: Press and hold the power button () for a few seconds until the indicator lights illuminate.
- To power off: Press and hold the power button () again for a few seconds until the lights turn off.

3. Bluetooth Pairing

1. Ensure the speaker is powered on and in Bluetooth pairing mode (the Bluetooth indicator light will flash).
2. On your device (smartphone, tablet, etc.), enable Bluetooth and search for available devices.
3. Select "ZEALOT P11" from the list of devices.
4. Once connected, the Bluetooth indicator light will become solid, and you will hear an audible confirmation.

Your browser does not support the video tag.

Video: A demonstration of the ZEALOT P11 Bluetooth Speaker's controls and LED lighting effects, including power on/off and mode changes.

OPERATING INSTRUCTIONS

Basic Controls

- **Play/Pause:** Press the Play/Pause button (▶) to play or pause audio.
- **Volume Up:** Press the '+' button to increase volume.
- **Volume Down:** Press the '-' button to decrease volume.
- **Next Track:** Press and hold the '+' button to skip to the next track.
- **Previous Track:** Press and hold the '-' button to go to the previous track.
- **Mode Switch:** Press the 'M' button to cycle through input modes (Bluetooth, AUX, USB, TF Card).



Image: Close-up of the speaker's control panel, displaying illuminated buttons for power, EQ, Bluetooth, play/pause, mode selection, and volume adjustment.

Sound Quality and Drivers

The speaker features XBass technology, utilizing two speakers (one tweeter and one bass woofer) to deliver clear highs, deep bass, and a balanced audio profile. DSP chip support ensures rich, smooth, and low-distortion sound, with high-frequency sound up to 40kHz.



Image: An exploded view diagram of the ZEALOT P11 speaker, highlighting its internal dual woofers and passive radiators for enhanced sound.

EQ Modes

The speaker features multiple EQ modes to customize your audio experience. Press the 'EQ' button to cycle through available sound profiles to match your listening preferences.

Dynamic Light Show

The speaker includes soft yet vivid LED lights that can move to the beat of the music or be adjusted manually to various light modes. This feature can enhance the atmosphere for parties or provide ambient lighting.

Wireless Stereo Dual Pairing (TWS)

For an immersive stereo experience, you can pair two ZEALOT P11 speakers together:

1. Ensure both P11 speakers are powered on and not connected to any other Bluetooth device.
2. On one speaker (this will be the primary speaker), press the TWS pairing button (often indicated by a chain link icon).
3. The speakers will automatically search and connect to each other. Once paired, the indicator lights will confirm the connection, and you will experience 360° left and right high-definition surround sound.
4. Connect your device to the primary speaker via Bluetooth as described in the "Bluetooth Pairing" section.

True Wireless Stereo Pairing



Image: Two ZEALOT P11 speakers positioned on a beach, with visual cues indicating their wireless stereo pairing capability.

Multiple Playback Modes

In addition to Bluetooth, the ZEALOT P11 supports several other audio input methods:

- **USB Port:** Insert a USB flash drive containing audio files.
- **AUX Port:** Connect an external audio device using a 3.5mm audio cable (not included).
- **TF Card Slot:** Insert a Micro SD (TF) card with audio files.

UP TO 20 HOURS PLAYTIME

Enjoy your outdoors activities immersively



Image: The side panel of the ZEALOT P11 speaker, clearly showing the TF card slot, AUX input, USB-C charging port, and USB-A port for various playback options.

MAINTENANCE

Waterproof Rating (IPX6)

The ZEALOT P11 speaker is IPX6 waterproof, meaning it is protected against high-pressure water jets from any direction. This makes it suitable for outdoor use and environments where it might encounter splashes or rain. However, it is **not designed for submersion** in water. Ensure all port covers are securely closed before exposing the speaker to water.

Cleaning

Wipe the speaker with a soft, damp cloth. Do not use abrasive cleaners or solvents, as these may damage the surface.

Storage

When not in use for extended periods, store the speaker in a cool, dry place away from direct sunlight and extreme temperatures. Charge the battery periodically to maintain its health.

TROUBLESHOOTING

- **No Power:** Ensure the speaker is fully charged. Connect it to a power source and try again.
- **No Sound:** Check the volume levels on both the speaker and your connected device. Ensure the correct input mode is selected.
- **Bluetooth Pairing Issues:**
 - Ensure the speaker is in pairing mode.
 - Disable and re-enable Bluetooth on your device.
 - Move the speaker closer to your device.
 - Clear the "ZEALOT P11" from your device's Bluetooth history and try pairing again.
- **Poor Sound Quality:** Ensure the speaker is within Bluetooth range (up to 50ft). Check for obstructions between the speaker and your device. Try a different audio source or file.
- **TWS Pairing Failure:** Ensure both speakers are P11 models and not connected to any other Bluetooth device before initiating TWS pairing.

SPECIFICATIONS

Feature	Detail
Brand	ZEALOT
Model Name	S76 (P11)
Speaker Type	Outdoor/Indoor/Portable/Home/Party/Wireless
Connectivity Technology	Bluetooth 5.3
Wireless Range	Up to 50 Feet
Speaker Maximum Output Power	50 Watts (80W Peak)
Audio Driver Type	Dynamic Driver (1 tweeter, 1 bass woofer)
Frequency Response	20 Hz - 40 kHz
Battery Capacity	6000mAh
Playtime	Up to 20 hours (at 50% volume)
Charging Time	Refer to charging indicator for full charge status.
Waterproof Rating	IPX6
Product Dimensions	5.12"D x 10.12"W x 4.96"H
Item Weight	3.31 Pounds
Control Method	Touch
Material	Plastic



Image: Technical drawing illustrating the dimensions of the ZEALOT P11 speaker.


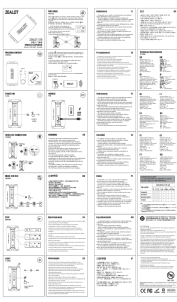
WARRANTY AND SUPPORT

The ZEALOT P11 Bluetooth Speaker comes with a limited warranty. For detailed warranty information, product support, or to contact customer service, please refer to the official ZEALOT website or the contact information provided in your product packaging.


You can also visit the [ZEALOT Store on Amazon](#) for additional resources and product information.

Related Documents - S76


--	--

	<p>ZEALOT S79 Portable Bluetooth Speaker User Manual and Specifications</p> <p>Detailed user manual and technical specifications for the ZEALOT S79 100W portable Bluetooth speaker, covering setup, features, safety warnings, and regulatory information.</p>
	<p>ZEALOT-S76 Wireless Speaker: Quick Start Guide & User Manual</p> <p>Comprehensive quick start guide and user manual for the ZEALOT-S76 wireless speaker. Learn how to set up, connect via Bluetooth, use Party Add (TWS) for dual pairing, control playback, and understand technical specifications and important safety information.</p>

ZEALOT S-67



Quick Start Manual



1. Turn On/Off

Long press for 3 seconds. Hear the "ON" prompt sound to indicate power on.
Long press for 3 seconds. Hear the "OFF" prompt sound to indicate power off.

2. Function Introduction



Bluetooth mode, TF card, USB mode and AUX mode will be automatically selected when the speaker is powered on.

2.1 Bluetooth

2.1.1 Bluetooth connection
1. Power on the speaker and enter the Bluetooth pairing mode.
2. Press the "MODE" button on the speaker to enter the Bluetooth pairing mode.
3. Press the "MODE" button on the speaker to enter the Bluetooth pairing mode.

Notes:
1. When the speaker is powered on, please press the "MODE" button to enter the Bluetooth pairing mode.
2. When the speaker is powered on, please press the "MODE" button to enter the Bluetooth pairing mode.
3. When the speaker is powered on, please press the "MODE" button to enter the Bluetooth pairing mode.

2.2 Data transmission and USB audio function

USB data cable connection with computer can be used for power charging while the speaker is powered on. Connect the USB data cable to the speaker and the computer. After the USB data cable is connected, the speaker will be powered on and the USB audio function will be activated.

2.3 Equalizer function

Click the equalizer icon on the speaker to enter the equalizer function. The equalizer function can be used to adjust the sound effect of the speaker.

2.4 USB Mode

Insert the USB and hear the prompt tone "USB" to play the songs in the USB.

2.5 TF Card Mode

Insert the TF card and hear the prompt tone "TF Card" to play the songs in the TF card.

2.6 AUX Mode

Connect with audio cable, will switch to aux mode after hearing the warning tone "AUX".

3. Charging

1. When the battery voltage is low, there is a voice prompt "Low battery". Please charge the speaker in time.
2. When the battery voltage is low, there is a voice prompt "Low battery". Please charge the speaker in time.

4. Specification

Input Voltage: DC5V
Output Voltage: 5V/1A
Power: 10W
Frequency response: 20Hz-20KHz
Impedance: 16Ω
Dimensions: 100*100*40mm

5. Notice

1. Please make sure the model of the charger is suitable for this product before charging.
2. Do not charge the speaker in a flammable or explosive environment.
3. Do not use the speaker for a long time without rest.

Tip: Keep your speaker & mobile phone in USB working range.

CE, FCC, RoHS, CCC, and other certification logos.


[Zealot S-67 Bluetooth Speaker Quick Start Manual](#)

A quick start guide for the Zealot S-67 Bluetooth speaker, covering power on/off, mode switching, Bluetooth pairing and calls, TWS connection, music playback, data transmission, equalizer functions, USB and TF card playback, AUX mode, charging, specifications, and important notices.



[ZEALOT-S32 Pro Wireless Speaker: Quick Start Guide and Specifications](#)

Get started with your ZEALOT-S32 Pro wireless speaker. This guide covers packing contents, basic operations like power, Bluetooth pairing, light modes, and technical specifications. Learn how to use your portable HIFI stereo speaker safely and effectively.

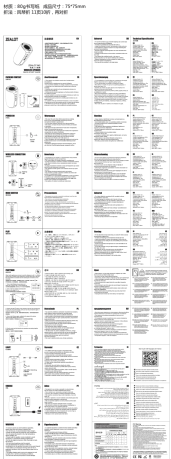

[ZEALOT M2 Portable Bluetooth Speaker User Manual](#)

Detailed user manual for the ZEALOT M2 portable Bluetooth speaker, featuring IPX5 waterproofing, 360° sound, TWS stereo pairing, and 10 hours of playtime, ideal for camping and outdoor use. This manual is available in multiple languages.