

# KASTA KMCAP-CT-W Clipsal30 Mech -Hpm Linea & Excel Instruction Manual


[Home](#) » [KASTA](#) » KASTA KMCAP-CT-W Clipsal30 Mech -Hpm Linea & Excel Instruction Manual 

## Contents

- [1 KASTA KMCAP-CT-W Clipsal30 Mech -Hpm Linea & Excel](#)
- [2 APP Installation](#)
- [3 Important Safety Information](#)
- [4 FEATURES](#)
- [5 FUNCTION SETUP](#)
- [6 TECHNICAL SPECIFICATIONS](#)
- [7 CONNECTION DIAGRAM](#)
- [8 Documents / Resources](#)
  - [8.1 References](#)
- [9 Related Posts](#)

# KASTA

KASTA KMCAP-CT-W Clipsal30 Mech -Hpm Linea & Excel

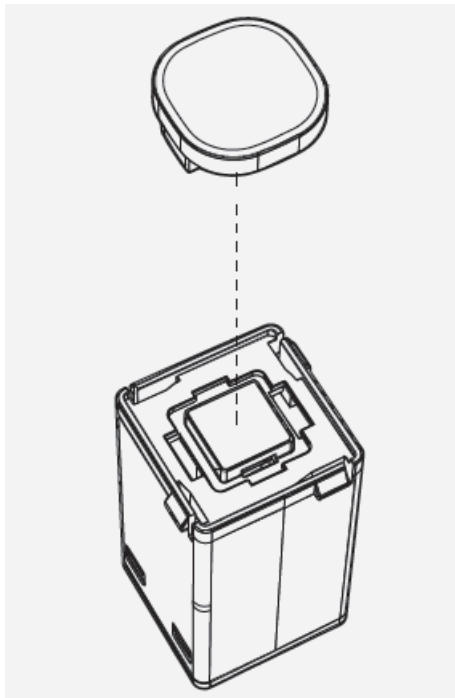

## APP Installation

Visit [www.kasta.com.au](http://www.kasta.com.au) or your app store to download the free KASTA app. iOS: requires iOS 9.0 or later. Android: requires Android 4.4 or later. Devices must support Bluetooth 4.0



## Important Safety Information

- This product must be installed by a licensed electrician in accordance with all the requirements of AS/NZS 3000 (current edition) and other relevant Standards and Regulations. Electricity MUST be disconnected prior to installation. Failure to do so may result in serious injury and or loss of life.
- Indoor use only. Not suitable for damp or explosive environments.
- Complies to Australian Standards AS/NZS 60950.1:2015, AS/NZS CISPR 15.
- No user-serviceable parts inside.

## FEATURES

- Mains powered curtain control module
- Compatible with standard bidirectional 4-wire motors (2 Active, 1 Neutral, 1 Earth).
- Single-phase 240AC max. or 24VDC max. power.
- Simple 7 wire connection – A, N, Com, Open, Close, S1, S2.
- Install in conjunction with an appropriately rated momentary action mechanism to S1 and S2.
- Can be paired with KASTA remote switches for either single button operation or two-button operation (8x maximum).
- Smart functions via phone/tablet with the app such as schedules, timers, scenes and groups.
- Built-in overvoltage and overcurrent protection.
- To prevent a reduction in Bluetooth ® signal strength, install away from metal objects.

## FUNCTION SETUP

First, calibrate curtain using KASTA app.

### S1 CONNECTION

#### **ON/PAUSE: 1 CLICK**

Open or pause curtain.

#### **OPEN UNTIL RELEASED: LONG PRESS**

Curtain opens until button is released. S2 CONNECTION

#### **ON/PAUSE: 3 CLICKS**

Close or pause curtain.

#### **CLOSE UNTIL RELEASED: LONG PRESS**

Curtain closes until button is released. S1, S2 CONNECTION or RESET BUTTON

#### **DELAY TO OFF: 3 CLICKS\***

Curtain will automatically close after set time.

#### **PAIRING MODE: 6 CLICKS**

Enter pairing mode for multi-way control. Lights will pulse.

#### **FACTORY RESET: 9 CLICKS**

Restores all settings back to factory.


## TECHNICAL SPECIFICATIONS

- **Operating Temp:** -20°C to 40°C
- **Supply:** 220-240V AC 50Hz

CONNECTION DIAGRAM



Documents / Resources



**KASTA**  
Installation Instructions

CLIPSA30 MECH /  
Hpm Linea & Excel

Product Code: KMCACT-W, KMCACT-BK  
Product Name: Clipsal30 Mech -Hpm Linea Excel

Technical Specifications

Material: Polycarbonate

Weight: 1.2 kg

Dimensions: 100 x 100 x 100 mm

[KASTA KMCACT-W Clipsal30 Mech -Hpm Linea & Excel](#) [pdf] Instruction Manual  
KMCACT-W, KMCACT-BK, Clipsal30 Mech -Hpm Linea Excel

References

- § [KASTA - Living Enhanced](#)
- § [KASTA - Living Enhanced](#)