

[manuals.plus](#) /

› [MOVE SPEED](#) /

› [MOVE SPEED MSP13 3-in-1 Portable Charger User Manual](#)

MOVE SPEED MSP13

MOVE SPEED MSP13 3-in-1 Portable Charger User Manual

Model: MSP13

1. INTRODUCTION

Thank you for choosing the MOVE SPEED MSP13 3-in-1 Portable Charger. This device combines a 10,000mAh power bank, a 35W fast wall charger, and a built-in retractable USB-C cable, offering a versatile charging solution for your electronic devices. This manual provides essential information for safe and efficient use.



Image: The MOVE SPEED MSP13 3-in-1 Portable Charger, showcasing its compact design with the foldable wall plug and retractable USB-C cable.

2. SAFETY INFORMATION

Please read all safety instructions before using this product. Failure to follow these instructions may result in fire, electric shock, injury, or damage to the product or property.

- Do not expose the device to extreme temperatures (above 65°C/149°F) or direct sunlight.
- Do not open, crush, puncture, or incinerate the device.
- Keep out of reach of children.
- Avoid dropping or subjecting the device to strong impacts.
- Do not use the device if it is damaged or modified.
- Use only original or certified cables for charging.
- Disconnect the charger when not in use.

3. PACKAGE CONTENTS

Verify that all items are present in the package:

- MOVE SPEED MSP13 3-in-1 Portable Charger
- User Manual

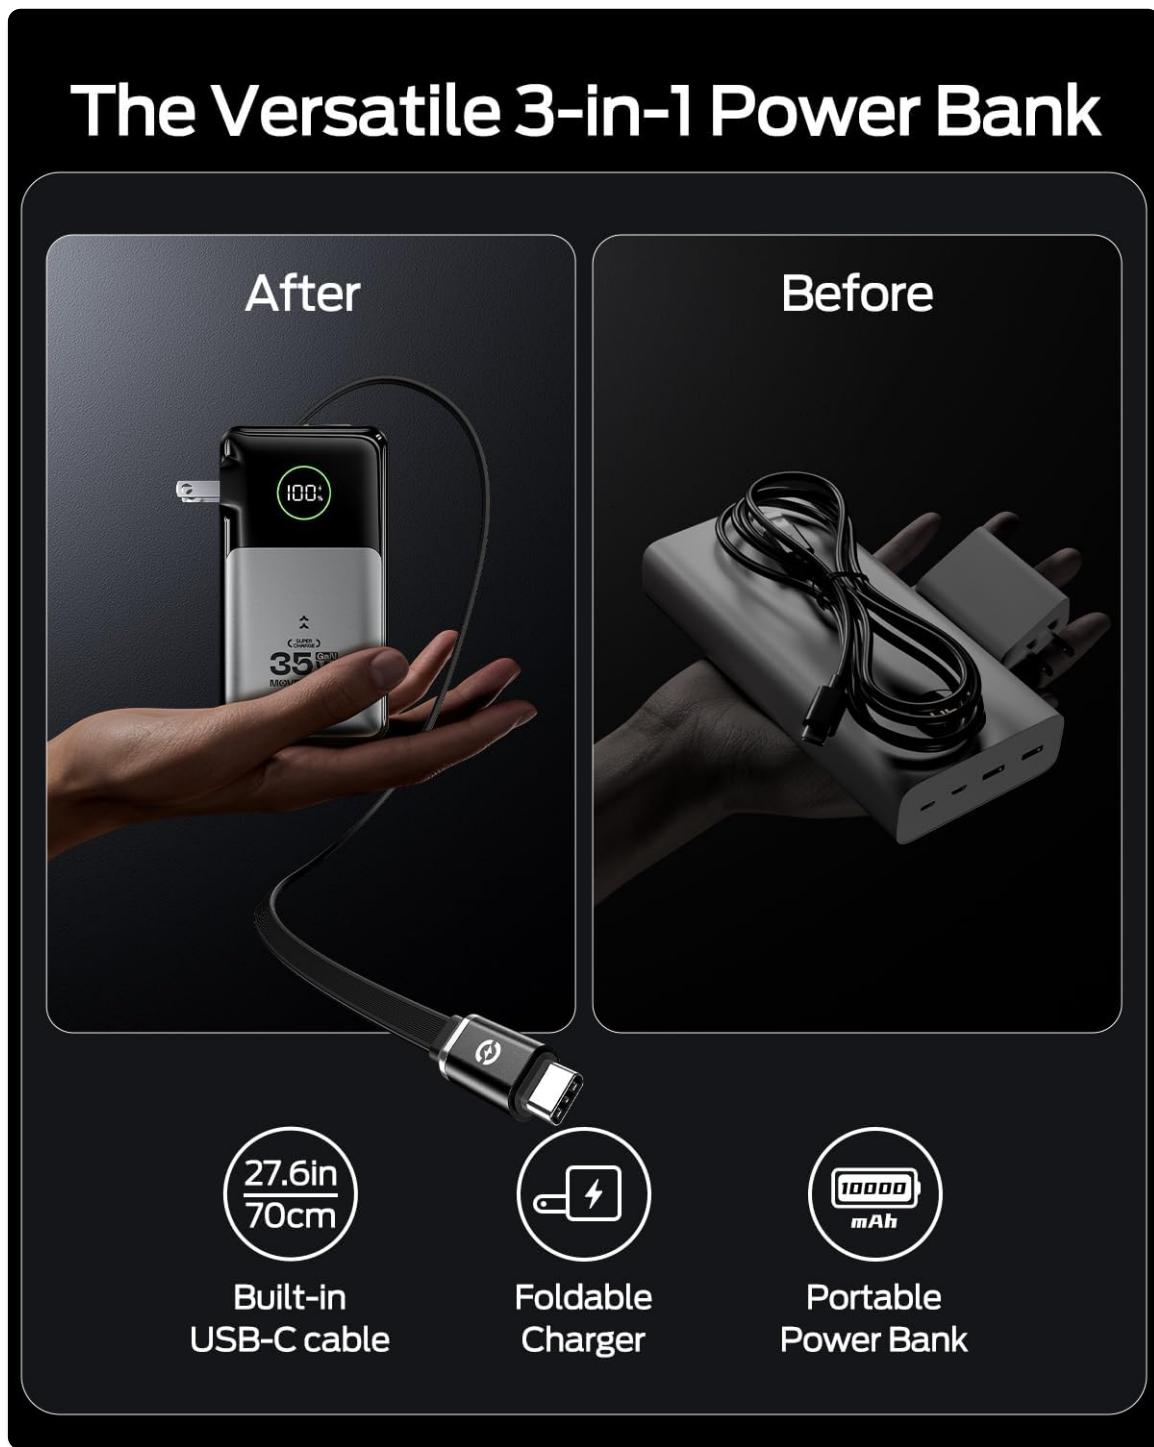


Image: The MOVE SPEED MSP13 3-in-1 Portable Charger and its packaging, illustrating the compact nature of the device compared to traditional chargers and cables.

4. PRODUCT OVERVIEW

The MOVE SPEED MSP13 is designed for convenience and efficiency. Familiarize yourself with its

components:

- **Foldable Wall Plug:** Integrated AC prongs for direct wall charging.
- **Retractable USB-C Cable:** A built-in 27.6-inch (70cm) USB-C cable for charging compatible devices.
- **USB-C Port (Input/Output):** Supports both charging the power bank and charging external devices.
- **USB-A Port (Output):** For charging external devices.
- **Digital Display:** Shows real-time battery percentage (0-100%) and input/output power status.
- **Power Button:** Activates the display and controls the flashlight function.
- **Flashlight:** A small LED light for convenience.

Compact Size, Massive Power



Optimized for backpack charging

Image: Close-up view of the MOVE SPEED MSP13, highlighting the USB-C and USB-A ports, and the digital display.

5. SETUP

5.1 Initial Charging of the Power Bank

Before first use, fully charge your MOVE SPEED MSP13 power bank.

1. **Using the Foldable Wall Plug:** Extend the foldable AC prongs and plug the power bank directly into a wall outlet. The digital display will show the charging progress.
2. **Using a USB-C Cable:** Connect a USB-C cable to the power bank's USB-C port and to a compatible USB wall adapter.

5.2 Power On/Off and Battery Check

1. **To check battery level:** Press the power button once. The digital display will illuminate, showing the current battery percentage.
2. The device will automatically power off after a period of inactivity to conserve battery.

6. OPERATING INSTRUCTIONS

6.1 Charging Devices (Wired)

The MSP13 allows you to charge up to three devices simultaneously.

1. **Using the Retractable USB-C Cable:** Pull out the built-in USB-C cable to the desired length (up to 27.6 inches) and connect it to your device's USB-C port.
2. **Using the USB-C Port:** Connect your device's USB-C charging cable to the power bank's USB-C port.
3. **Using the USB-A Port:** Connect your device's USB-A charging cable to the power bank's USB-A port.

Smooth Extensions, Zero Snags



Image: Demonstrates the retractable USB-C cable extended from the power bank, ready to charge a device.

6.2 Pass-Through Charging

You can charge the power bank itself while simultaneously charging your devices.

1. Plug the power bank into a wall outlet using its foldable prongs.
2. Connect your devices to the power bank's output ports (retractable USB-C, USB-C port, or USB-A port).

Huge Power, Tiny Pack

1,0000 mAh



2.0 Charges
iPhone 16

1.0 Charges
iPad Pro 11

1.5 Charges
S24 Ultra

1.7 Charges
Switch

Image: The MOVE SPEED MSP13 plugged into a wall outlet, simultaneously charging itself and multiple external devices.

6.3 Using the Flashlight

The power bank includes a small flashlight for convenience.

1. Double-press the power button to turn the flashlight on.
2. Double-press the power button again to turn the flashlight off.

7. MAINTENANCE

Proper care ensures the longevity of your power bank.

- **Cleaning:** Wipe the device with a soft, dry cloth. Do not use harsh chemicals or abrasive materials.
- **Storage:** Store the power bank in a cool, dry place away from direct sunlight and extreme temperatures. If storing for extended periods, charge it to about 50% every 3 months.
- Avoid exposing the ports to dust or moisture.

8. TROUBLESHOOTING

- **Device not charging:** Ensure the power bank is charged. Check all cable connections. Try a different cable or port.
- **Slow charging:** Verify that your device supports fast charging and that the cable used is compatible. Ensure the power bank has sufficient charge.
- **Digital display not working:** Press the power button to activate the display. If it remains off, the battery might be fully depleted or the device may require service.

9. SPECIFICATIONS

Feature	Specification
Model Number	MSP13
Battery Capacity	10,000mAh (38.5Wh)
Input (Wall Charger Mode)	AC 100-240V~50/60Hz 0.3A
Input (USB-C)	35W Max
Output (Retractable USB-C Cable)	35W Max
Output (USB-C Port)	35W Max
Output (USB-A Port)	22.5W Max
Product Dimensions	8.19 x 4.49 x 1.56 inches
Item Weight	7.2 ounces (269g)
Airline Approved	Yes (38.5Wh)

10. WARRANTY AND SUPPORT




The MOVE SPEED MSP13 Portable Charger comes with a **3-Year Warranty**.

For technical support, warranty claims, or any inquiries, please contact us:

- **Email:** support@iniu.shop
- **Website:** iniu.shop

© 2025 MOVE SPEED. All rights reserved.

Related Documents - MSP13


	<p>MOVE SPEED YSPBQ10 Power Bank User's Guide</p> <p>Comprehensive user guide for the MOVE SPEED YSPBQ10 Power Bank, detailing technical specifications, charging instructions, power display, safety cautions, environmental claims, and warranty information for optimal use and maintenance.</p>
	<p>MOVE SPEED M25 Energy Planet 130W 25000mAh Portable Power Bank User Manual</p> <p>User manual for the MOVE SPEED M25 Energy Planet portable power bank, detailing its 130W fast charging, 25000mAh capacity, USB-C PD3.0 capabilities, and smart LED display for charging laptops, smartphones, and other devices.</p>
	<p>Move Speed Drive User Guide: Backup, Encryption, and Fingerprint Features</p> <p>A comprehensive guide to the Move Speed Drive, detailing how to use its software for data backup, phone backup, restore operations, and security features like password and fingerprint encryption.</p>
	<p>MOVE SPEED MoveSpeedDrivePro USB Flash Drive User Manual</p> <p>User manual for the MOVE SPEED MoveSpeedDrivePro USB flash drive. This guide covers PC software download and installation, setting up AES256 and fingerprint encryption, data backup procedures, and restoring factory settings. Features USB3.2, Type C, and 520MB/s speeds.</p>
	<p>MOVE SPEED S80 80,000mAh 130W Portable Power Station User Guide</p> <p>Comprehensive user guide for the MOVE SPEED S80 portable power station. Learn how to use its 80,000mAh capacity, 130W output, digital display, USB-C ports, and solar charging capabilities for camping, laptops, and emergency backup.</p>



[MOVE SPEED USB Solid State Drive User Guide and Warranty Information](#)

Comprehensive user guide for MOVE SPEED USB 3.2 Solid State Drives. Learn about plug-and-play setup, high-speed connectivity, safe data handling, warranty policies, and environmental compliance.


Documents - MOVE SPEED – MSP13

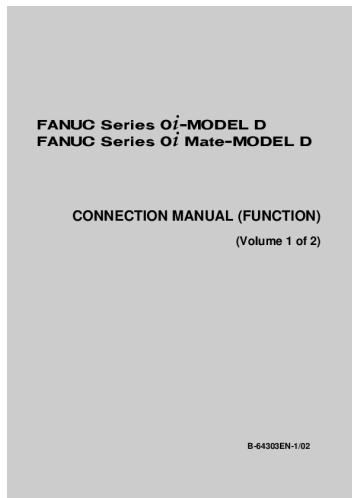

[FANUC Series Oi-MODEL D / Oi Mate-MODEL D Connection Manual \(Function\)](#)

This manual provides detailed information on the connection and function setup for FANUC Series Oi-MODEL D and FANUC Series Oi Mate-MODEL D CNC systems, essential for machine tool builders.

lang:en score:11 filesize: 5.23 M page_count: 1042 document date: 2011-06-30

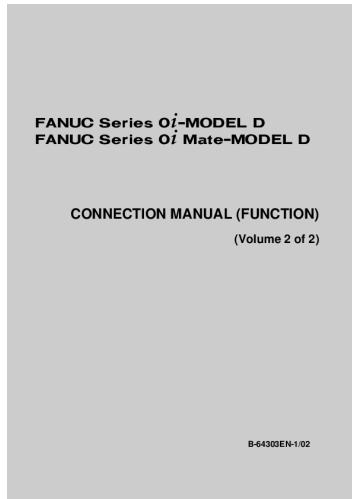

[\[pdf\] User Manual Installation Guide Specifications](#)

FANUC Series 0i MODEL D Mate CONNECTION MANUAL FUNCTION B 64303EN 1 02 ADEE

Download Fanuc Connection Manual Function Vol 2 CNC B64303EN1 cncmanual 2015 06 280615 fanuc
|||

FANUC Series 0 -MODEL D FANUC Series 0 Mate-MODEL D CONNECTION
MANUAL FUNCTION Volume 2 of 2 B- ... 3 2 1 0 TLAL MSP07#P MSP06#P
MSP05#P MSP04#P MSP03#P MSP02#P MSP01#P MSP00#P MSP15#P MSP14#P
MSP13#P MSP12#P MSP11#P MSP10#P MSP09#P MSP08#P ORARC#SP
TLMC#SP LDT2C#SP LDT1C#SP SARC#SP SDTC#SP ...

lang:en score:11 filesize: 5.34 M page_count: 664 document date: 2011-06-30