



Kessil W2K DMX Setting Box User Guide

[Home](#) » [Kessil](#) » Kessil W2K DMX Setting Box User Guide 

Contents


- [1 Kessil W2K DMX Setting Box](#)
- [2 INSTALLATION](#)
- [3 Documents / Resources](#)
- [4 Related Posts](#)

Kessil®

Kessil W2K DMX Setting Box



INSTALLATION

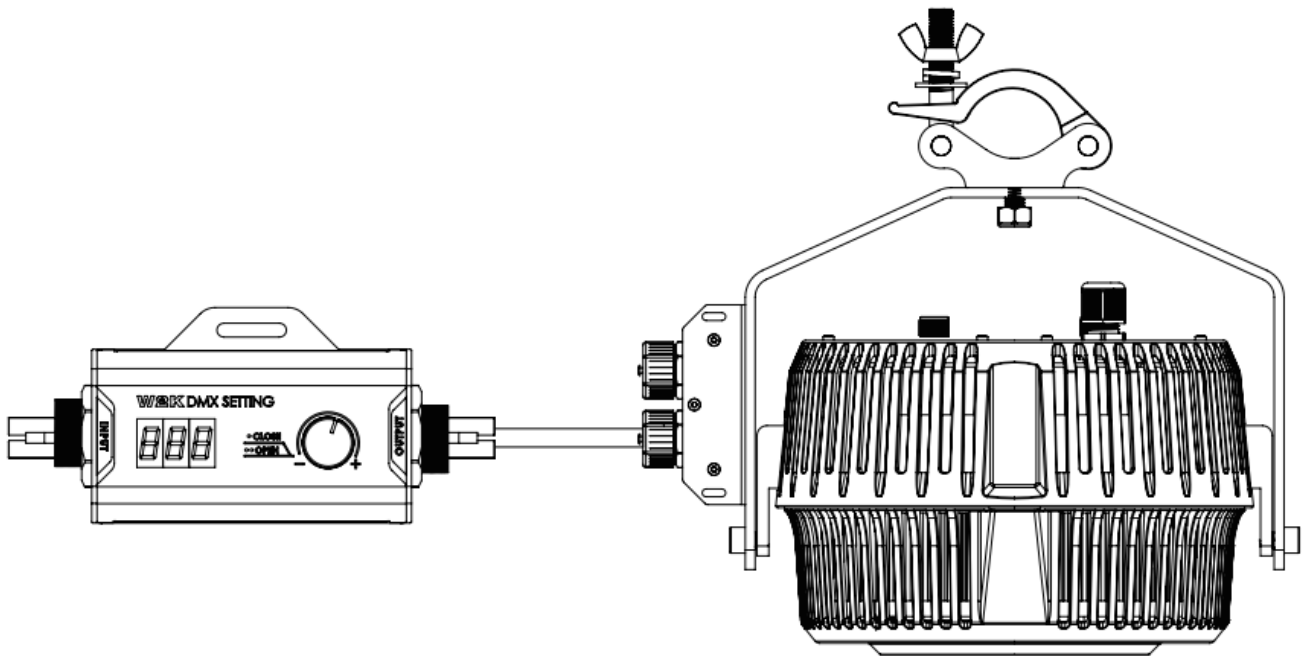



1. Connect OUTPUT port and W2K unit using RJ45 cable.
2. When connected, press and hold knob for 5 sec to turn on and enable editing. To change the DMX address, press the knob 2x. The DMX address will begin flashing. Turn the knob to adjust the DMX address, and press knob 1x to confirm.
3. Once the DMX address has been adjusted, remove the W2K DMX Setting box.

W2K Amazon Sun (8-bit mode) W2K Tuna Light Blue (8-bit mode)

DMX Address	Function		DMX Address	Function	
1	Intensity	0%-100%	1	Intensity	0%-100%
2	CCT	4000K-6500K	2	CCT	8000K-14000K

Fan Mode


1. Press knob 6x to entered fan mode, turn knob to adjust mode, press again to confirm.

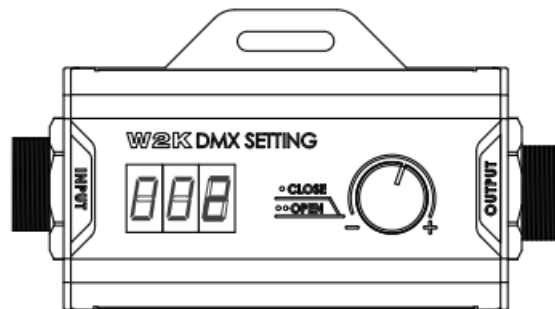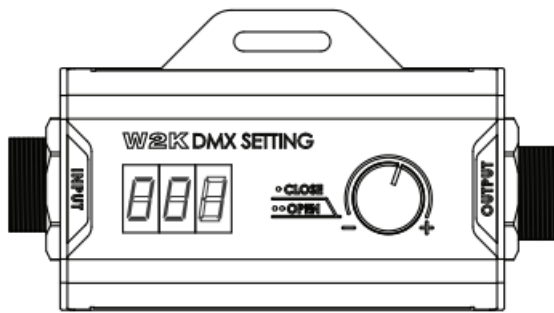

Fan Speed Options

1689 Regatta Blvd., Richmond, CA 94804 | Kessil@Kessil.com | (510) 620-5250

Documents / Resources

	Kessil W2K DMX Setting Box [pdf] User Guide W2K DMX Setting Box, W2K, DMX Setting Box, Setting Box, Box
---	---

[Manuals+](#)