

Keychron Q12 QMK Custom Mechanical Keyboard User Manual

Home » Keychron » Keychron Q12 QMK Custom Mechanical Keyboard User Manual





Q12 QMK Custom Mechanical Keyboard **User Manual**

Contents

- 1 Q12 QMK Custom Mechanical Keyboard
- 2 Quick Start Guide
- **3 Q12 CUSTOMIZABLE KEYBOARD**

SPECIFICATIONS

- **4 Q12 MECHANICAL KEYBOARD OVERVIEW**
- **5 Safety Precaution:**
- 6 Documents / Resources
- **7 Related Posts**

Q12 QMK Custom Mechanical Keyboard

Fully Assembled Version Keyboard 1x Fully Assembled Keyboard Including

- 1x Aluminum Case
- 1x PCB
- 1x Steel Plate
- 1x Case Foam
- 16x Gaskets (12 Installed and 4 in the Box)


- 7 Sets x Stabilizers
- 1 Set x Keycaps (PBT Double-shot)
- 1 Set x Switches

Cable

- 1x Type-C to Type-C Cable
- 1x Type-A to Type-C Adapter

Tools

- Ix Switch Puller
- Ix Keycap Puller
- 1x Screwdriver
- 1x Hex Key

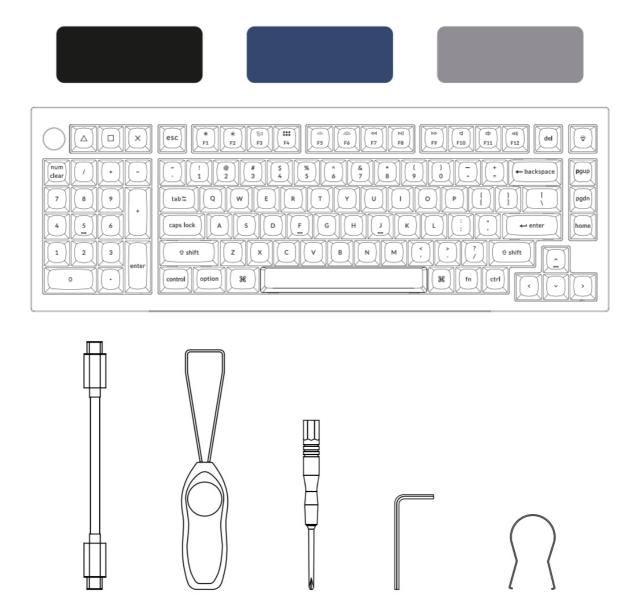

Barebone Version

Keyboard Kit 1x Keyboard Kit Without Keycaps & Switches) Including


- 1x Aluminum Case
- 1x PCB
- 1x Steel Plate
- 1x Case Foam
- 16x Gaskets (12 Installed and 4 in the Box)
- 7 Sets x Stabilizers


Cablbe

- 1x Type-C to Type-C Cable
- 1x Type-A to Type-C Adapter

Tools

- 1x Switch Puller
- 1x Keycap Puller
- 1x Screwdriver
- 1x Hex Key

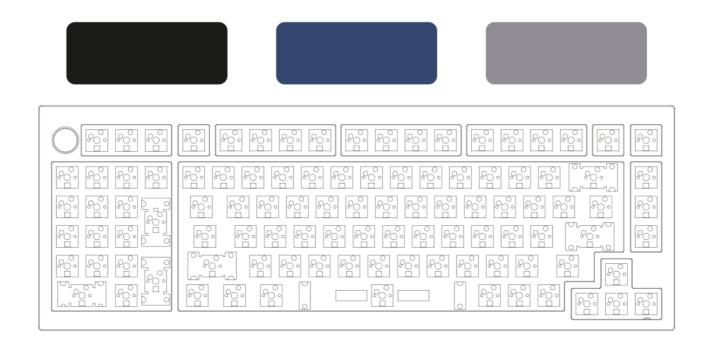


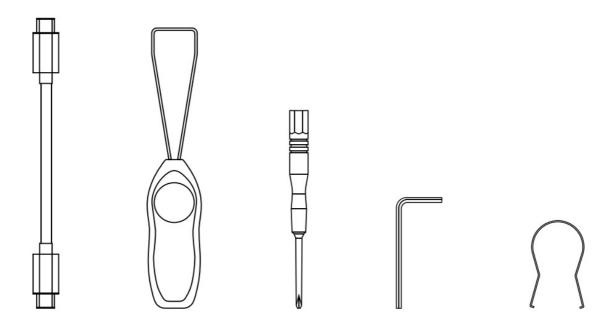

Quick Start Guide


If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Mac / Windows

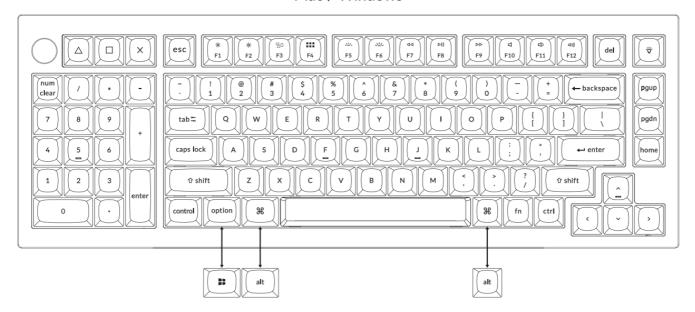

1. Switch To The Right System

Please make sure the system toggle on the top left corner has been switched to the same system as your computer's operating system.




2. The VIA Key Remapping Software

Please visit caniusevia.com to download the latest VIA software to remap the keys. If the VIA software cannot recognize your keyboard, please reach out to our support to get the instruction.



3. The Layers


There are four layers of key settings on the keyboard. The layer 0 and layer 1 are for the Mac system. The layer 2 and layer 3 are for the Windows system.



If your system toggle is switched to Mac, then the layer 0 will be activated.




If your system toggle is switched to Windows, then the layer 2 will be activated. Remember that if you are using it in Windows mode, please make changes to the layer 2 instead of the top layer (the layer 0). This is a common mistake people are making.




4. The Backlight

Press fn + Q to change the lighting effect

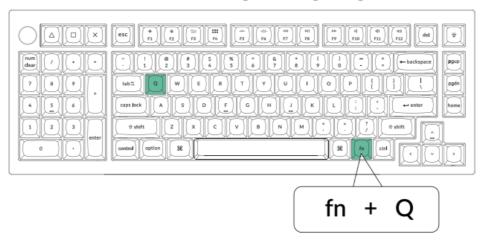


Press fn + tab to turn the backlight on/off

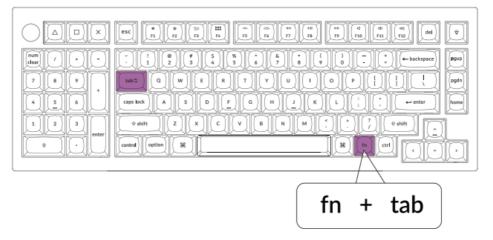

5. Adjust The Backlight Brightness

Press fn + W to increase the backlight brightness

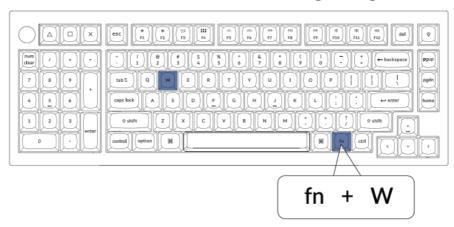

Press fn + S to decrease the backlight brightness




6. Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.

- 7. Watch The Building Tutorial On Our Website

 If you are building the keyboard for the first time, we highly recommend you watch the building tutorial video on our website first, then start building the keyboard yourself.
- 8. Factory Reset

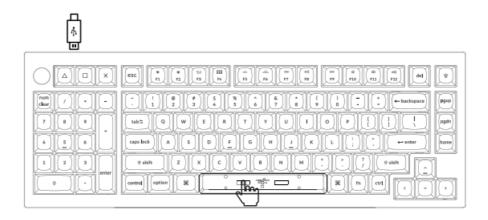


Troubleshooting? Don't know what's going on with the keyboard?

- 1. Plug in the power cable and factory reset the keyboard by pressing fn + J + Z (for 4 seconds).
- 2. Download the right firmware and QMK Toolbox from our website.
- 3. Unplug the power cable and remove the space bar keycap to find the reset button on the PCB.
- 4. Hold the reset key first, then plug in the power cable. Release the reset key, and the keyboard will now enter DFU mode.
- 5. Flash the firmware with the QMK Toolbox.
- 6. Factory reset the keyboard again by pressing fn + J + Z (for 4 seconds).
 - * Step by step guide can be found on our website.

Q12 CUSTOMIZABLE KEYBOARD SPECIFICATIONS


SPECIFICATIONS		
Layout	96%	
Switch type	Mechanical	
Width	145 mm	
Length	409.4 mm	
Front height	20.2 mm (without keycaps) 30.9 mm (with keycaps installed)	
Back height	33.4 mm (without keycaps) 42.8 mm (with keycaps installed)	
Keyboard feet	2.4 mm	
Angle	5.3 degree	

Q12 MECHANICAL KEYBOARD OVERVIEW

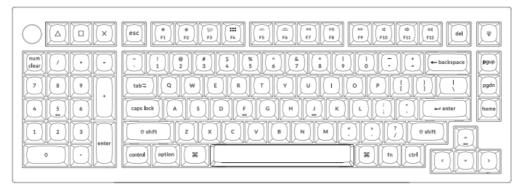

Windows







- 1. Type-C Port
- 2. Mac Layout
- 3. Windows Layout

DEFAULT KEY LAYOUT:


LAYER 0: This layer will be activated when your keyboard's system toggle is switched to Mac.

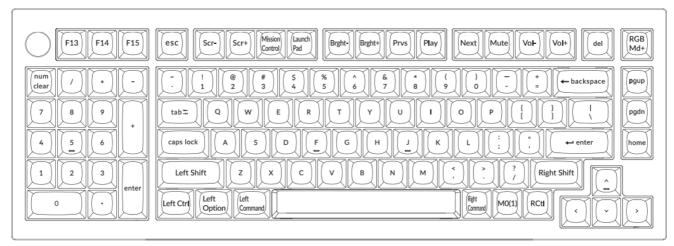

LAYER 1: This layer will be activated when your keyboard's system toggle is switched to Mac and press the fn/M0(1) key.

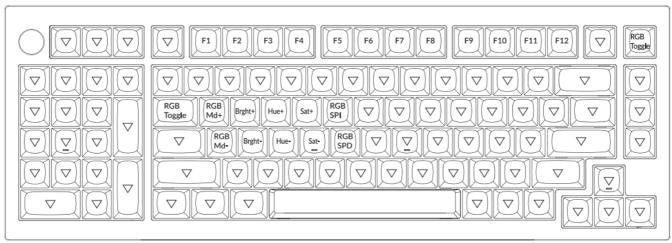

LAYER 2: This layer will be activated when your keyboard's system toggle is switched to Windows.

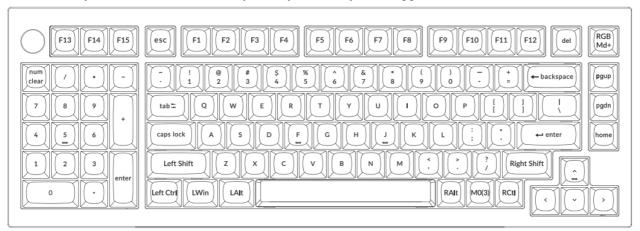

LWin = Left Windows LAIt = Left Alt RAIt = Right Alt RCtI = Right CtrI

LAYER 3: This layer will be activated when your keyboard's system toggle is switched to Windows and press the fn/MO(3) key.



KEY DESCRIPTION

Key Description	
Scr-	Screen Brightness Decrease
Scr+	Screen Brightness Increase
Bright	Backlight Decrease
-Bright+	Backlight Increase
Prvs	Previous
Play	Play/Pause
Next	Next
Mute	Mute
Vol-	Volume Decrease
Vol+	Volume Increase
RGB Toggle	Tum Backlight on/off

Key Description	
RGBMd+	RGB Mode Next
RGBMd-	RGB Mode Previous
Hue+	Hue Increase
Hue-	Hue Decrease
RGB SPI	RGB Speed Increase
RGB SPD	RGB Speed Decrease
MO(1)	Layer 1 will be activated when holding this key
MO(3)	Layer 3 will be activated when holding this key

Due to compatibility, versions, brands and drivers of Windows/macOS, functionalities of third-party input tools may be affected while using the keyboard. Please make sure your operating system and drivers are up to date.

Certain multimedia keys or function keys do not work.

Functions of certain multimedia keys may be disabled due to compatibility, versions, brands, and drivers of devices.

*Multimedia keys: **/マロ/部/シ/(ロ/ロ/ロ/ロ/ロ/ロ) 「F1 / F2 / F3 / F4 / F5 / F6 / F7 / F8 / F9 / F10 / F11 / F12 Function keys:

Safety Precaution:

Keep the product, accessories and packaging parts out of the reach of children to prevent any accidents and choking hazards. Always keep the product dry to avoid corrosion. Do not expose the product to extreme temperatures below -10°C(5°F) or above 50°C(131°F) to preserve the lifespan of the keyboard.

Keychron, Inc.

Dover, DE 19901, United States
Find us at: https://www.keychron.com
Support@keychron.com

ff@keychron

@keychron

@keychronMK
Designed by Keychron
Made in China

Documents / Resources



Keychron Q12 QMK Custom Mechanical Keyboard [pdf] User Manual Q12 QMK Custom Mechanical Keyboard, Q12, QMK Custom Mechanical Keyboard, Mechanical Keyboard, Keyboard

Manuals+,