

Genérico JT 8191

Genérico JT-8191 Smart Wi-Fi 360 Security Camera Lamp User Manual

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Genérico JT-8191 Smart Wi-Fi 360 Security Camera Lamp. This device offers comprehensive home surveillance with features like a 360-degree panoramic view, motion tracking, two-way audio, and an integrated smoke detector, all accessible via the Yoosee application. Please read this manual thoroughly before using the product to ensure proper function and safety.

PRODUCT FEATURES


- **Motion Tracking and Notifications:** The camera automatically detects and tracks moving objects, sending real-time notifications to your smartphone.
- **24/7 Recording and Alarm:** Supports continuous recording to cloud storage (subscription required) or a Micro SD card (up to 128GB, sold separately). The camera can activate an audible alarm and white light to deter intruders.
- **Two-Way Communication:** Built-in microphone and speaker allow for remote communication with individuals in the camera's vicinity.
- **360-Degree Panoramic View:** Offers a wide 355° pan and 90° tilt range for comprehensive area monitoring.
- **Integrated Smoke Detector:** Utilizes photoelectric technology to detect smoke, triggering an 85dB alarm and sending alerts to your phone.
- **Simplified E27 Socket Installation:** Easily screws into any standard E27 light socket for quick setup.
- **Full HD 1080p Resolution:** Provides clear and detailed video footage.
- **Wi-Fi 2.4GHz Connectivity:** Connects wirelessly to your home network.
- **ONVIF Protocol Compatibility:** Ensures compatibility with various third-party DVRs and NVRs.

PACKAGE CONTENTS

Please check the package for the following items:

- 1x JT-8191 Smart Wi-Fi 360 Security Camera Lamp
- 1x E27 Socket Adapter
- 1x Set of Bushings and Screws

ARMAZENAMENTO em nuvem

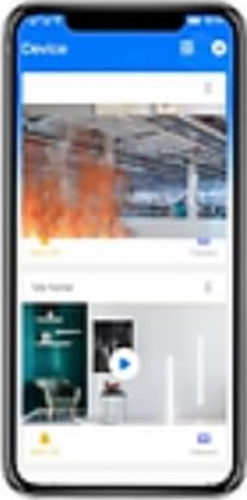

- Gravação em nuvem, através do aplicativo. *serviço pago.*
COMPRANDO CONOSCO GANHA 30 DIAS DE ARMAZENAMENTO EM NUVEM GRATUITO, para novos usuários.
- Gravação com cartão de memória de até 128gb.
Sistema de subscrição de imagens, quando o cartão enche ela passa a sobrescrever as imagens que estão no cartão.
- É possível gravar as imagens diretamente no DVR.
- Compatível com Android e IOS

ITENS:

- 1x Câmera
- 1x Bocal E27
- 1x Buchas e parafusos



Image: Package contents including the camera, E27 socket, and mounting hardware. Also illustrates cloud and Micro SD card storage options.

SETUP INSTRUCTIONS

1. **Unboxing and Inspection:** Carefully unpack all components and verify that all items listed in the 'Package Contents' section are present and undamaged.
2. **Download the App:** Search for and download the "**Yoosee**" application from your smartphone's app store (available for Android and iOS).
3. **Install the Camera:** Screw the camera into a standard E27 light socket. Ensure the socket is powered off before installation.
4. **Power On:** Turn on the power to the E27 socket. The camera will power on and initiate its startup

sequence.

5. **Pair with Wi-Fi:** Open the Yoosee app, create an account if you don't have one, and follow the on-screen instructions to add your new device. Ensure your smartphone is connected to a 2.4GHz Wi-Fi network during the pairing process.
6. **Insert Micro SD Card (Optional):** If local storage is desired, insert a Class 10 Micro SD card (up to 128GB) into the designated slot on the camera before powering it on.



Image: The JT-8191 camera, designed to resemble a lamp, featuring a smoke detector and alarm functionality.

OPERATING INSTRUCTIONS

1. **Live View:** Open the Yoosee app and select your camera to view the live video feed.
2. **PTZ Control:** On the live view screen, swipe your finger across the video to remotely pan (horizontal) and tilt (vertical) the camera lens to adjust the viewing angle.
3. **Two-Way Audio:** Tap the microphone icon in the app to speak through the camera's speaker, and listen through your phone's speaker.
4. **Motion Detection:** Enable motion detection in the app settings. You will receive push notifications on your phone when motion is detected. Adjust sensitivity and detection zones as needed.

5. **Smoke Detection:** The integrated smoke detector will automatically trigger an 85dB alarm and send notifications to your phone upon detecting smoke.
6. **Recording Playback:** Access recorded footage via the app. You can view recordings stored on the Micro SD card or in cloud storage (if subscribed).
7. **User Sharing:** In the app settings, you can invite other users to view your camera feed by sharing access.



FACILIDADES do dia a dia!



ÁUDIO

Ouçá e fale. Você pode se comunicar remotamente com quem estiver no mesmo ambiente da câmera.

ONVIF

Protocolo que permite o uso de marcas de terceiros. Tornando-a compatível com a maioria dos DVR's e NVR's.

RESOLUÇÃO HD

É possível ver cada detalhe da imagem.

CONTROLE A CÂMERA pelo aplicativo



Fácil de instalar, pode ser colocada em qualquer bocal E27 (bocal comum de lâmpadas), dispensa ferramentas.

Image: Features such as two-way audio communication, ONVIF protocol support for broader compatibility, and remote control via a smartphone application.

MAINTENANCE

- **Cleaning:** Gently wipe the camera lens and body with a soft, dry cloth. Do not use harsh chemicals or abrasive cleaners.
- **Firmware Updates:** Regularly check the Yoosee app for available firmware updates for your camera. Keeping the firmware updated ensures optimal performance and security.

- **Storage Management:** If using a Micro SD card, periodically check its capacity and ensure older recordings are being overwritten or backed up as needed.
- **Network Stability:** Ensure your Wi-Fi network remains stable to prevent interruptions in camera operation and recording.

TROUBLESHOOTING

Problem	Solution
Camera does not power on.	Ensure the E27 socket has power. Check the socket with another light bulb.
Cannot connect to Wi-Fi.	Verify your Wi-Fi network is 2.4GHz. Ensure the Wi-Fi password is correct. Move the camera closer to the router. Reset the camera and try pairing again.
No recording to Micro SD card.	Ensure the Micro SD card is inserted correctly and is Class 10. Format the card via the app. Check recording settings in the app.
Motion detection not working or too sensitive.	Adjust motion detection sensitivity and set specific detection zones within the Yoosee app.
Poor image quality.	Clean the camera lens. Ensure a stable Wi-Fi connection. Check if there is sufficient lighting in the monitored area.
Smoke detector alarm sounds frequently without smoke.	Ensure the camera is not installed in an area with high humidity, dust, or near cooking fumes. Clean the sensor area.

SPECIFICATIONS

Feature	Detail
Model	JT 8191
Application	Yoosee
Voltage	Bivolt (110V, 220V)
Power Consumption	3W
Socket Type	E27
Dimensions (Camera)	Approx. 9 cm (width) x 17 cm (height)
Product Dimensions	8 x 9 x 18 cm
Camera Weight	249g
Protection Rating	IP44

Feature	Detail
Video Resolution	Full HD 1080p
Lens	3.6mm
Horizontal Angle	56°
Vertical Angle	30°
Pan/Tilt Range	Pan 355°, Tilt 90°
Memory Card Support	Up to 128GB Micro SD (Class 10, not included)
Connectivity	Wi-Fi 2.4GHz, ONVIF Protocol
Compatible Devices	Smartphone
Color	White
Special Features	PTZ Technology, Integrated Smoke Detector, Two-Way Audio, Night Vision
Environment	Indoor/Outdoor Area
Certification	ANATEL: 21736-22-06326

Product size/weight



Image: Detailed measurements and weight specifications for the camera and its E27 socket adapter.

WARRANTY AND SUPPORT

For warranty information, technical assistance, or customer support, please refer to the retailer where you purchased the product or visit the manufacturer's official website. Please retain your purchase receipt as proof of purchase for any warranty claims.