



# Keychron V1 Max Mechanical Keyboard User Guide

[Home](#) » [Keychron](#) » Keychron V1 Max Mechanical Keyboard User Guide 

## Contents

- [1 Keychron V1 Max Mechanical Keyboard](#)
- [2 OVERVIEW](#)
- [3 Connect Bluetooth](#)
- [4 Connect Cable](#)
- [5 The VIA Key Remapping Software](#)
- [6 The Layers](#)
- [7 The Backlight](#)
- [8 Adjust The Backlight Brightness](#)
- [9 Warranty](#)
- [10 Watch The Building Tutorial On Our Website](#)
- [11 Factory Reset](#)
- [12 Documents / Resources](#)
- [13 Related Posts](#)




**Keychron V1 Max Mechanical Keyboard**




If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

## OVERVIEW

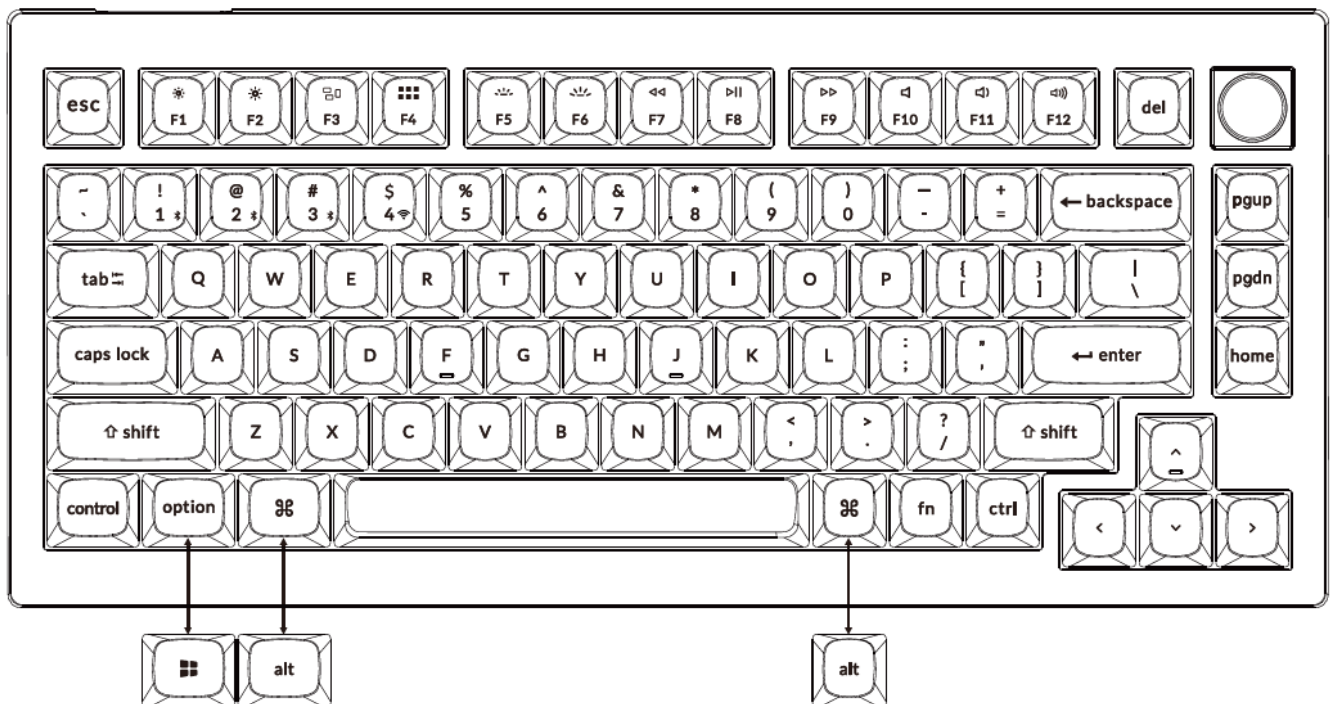


**Connect 2.4GHz Receiver**



Connect the 2.4GHz receiver to the device USB port.

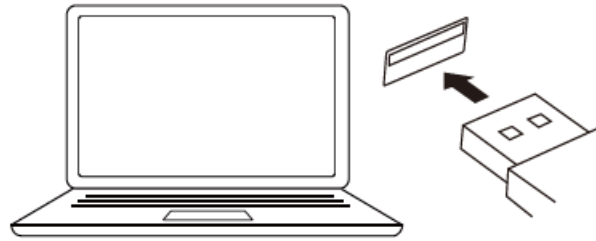

Switch toggle to 2.4GHz mode

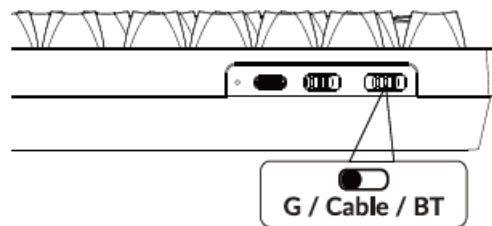

G = 2.4GHz

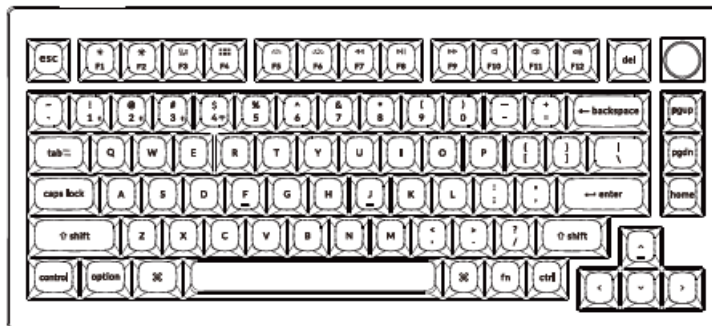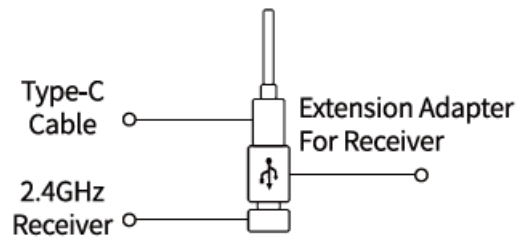


**Note:** For the best wireless experience, we recommend using the extension adapter for receiver and putting the 2.4GHz receiver somewhere on your desk close to your keyboard for a low rate of latency and fewer signal interferences


## Connect Bluetooth




### Switch toggle to Bluetooth

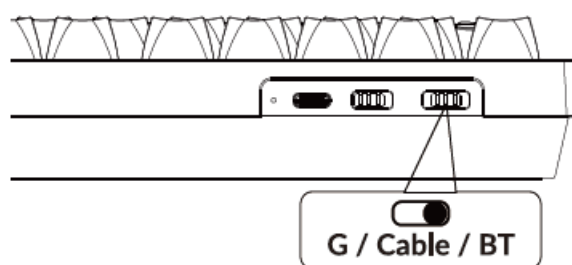

Press **Fn + 1** (for 4 seconds) and pair with device named **V1 Max**.

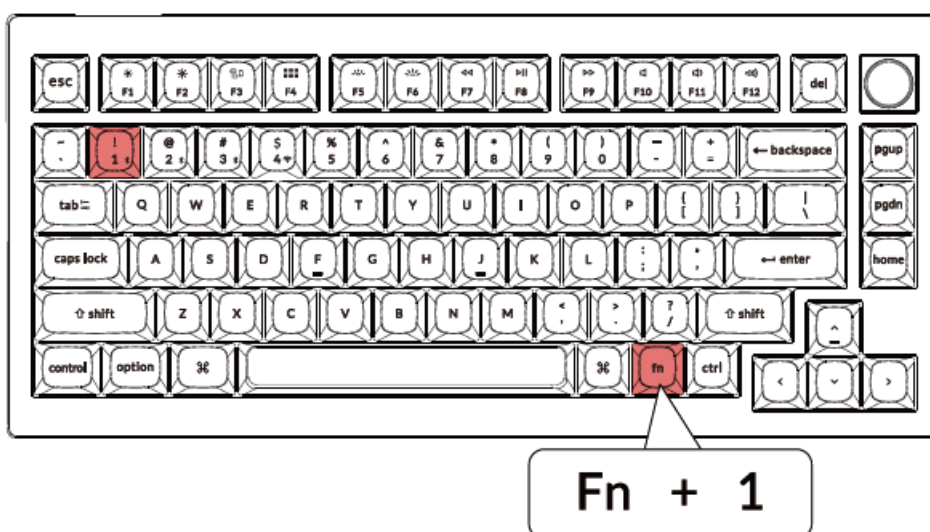

## Connect Cable

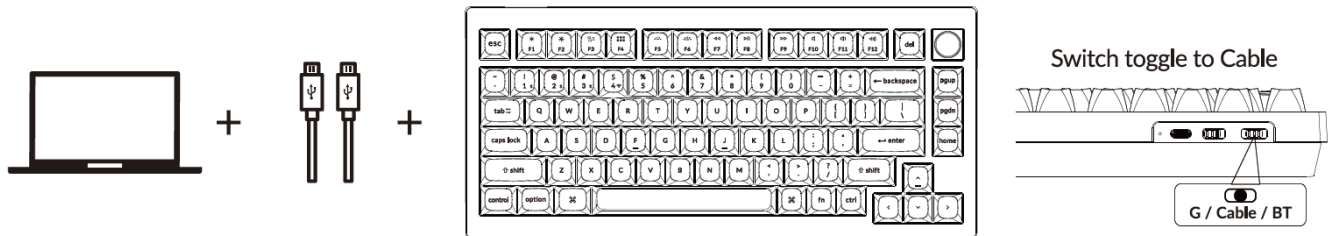

## The VIA Key Remapping Software




Please visit [usevia.app](https://usevia.app) to use the online VIA software to remap the keys.  
If the VIA cannot recognize your keyboard, please reach our support to get the instruction.

- The online VIA software can only run on the latest version of Chrome, Edge, and Opera browsers yet.
- VIA only works when the keyboard is connected by wire to the computer.

## The Layers

- There keyboard. are The four layer layers 0 of and key layer settings 1 are on for the the the Mac Windows system. The system. layer 2 and layer 3 are for window system.

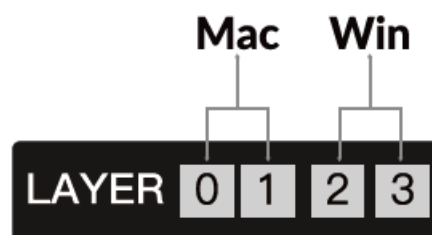

- If your system toggle is switched to Mac, then the layer 0 will be activated.




- If your system toggle is switched to Windows, then the layer 2 will be activated. Remember that if you are using it in Windows mode, please make changes to the layer 2 instead of the top layer (the layer 0). This is a common mistake people are making.

Mac ☐ Win ☒


LAYER 0 1 **2** 3

## The Backlight

Press fn + Q to change the lighting effect

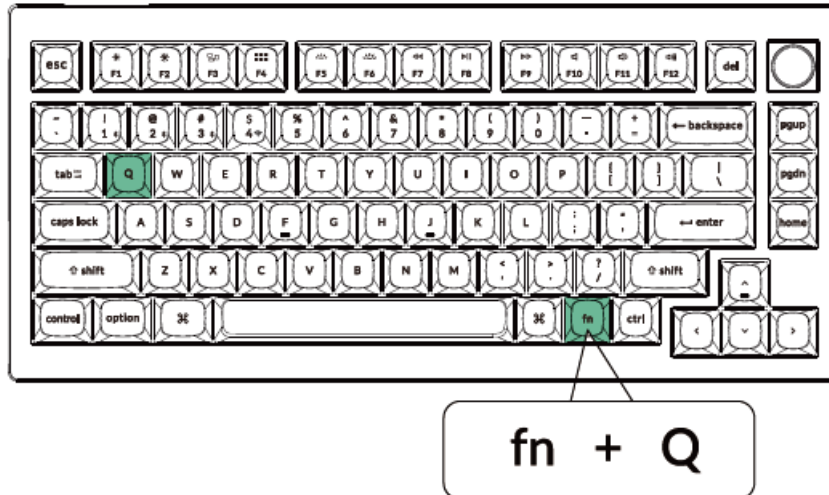

Press fn + tab to turn the backlight on/off

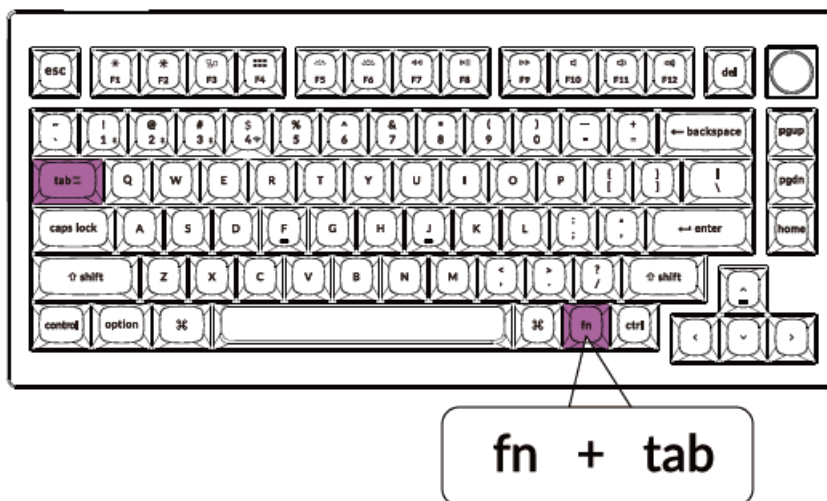

## Adjust The Backlight Brightness

Press fn + W to increase the backlight brightness



fn + W

Press fn + S to decrease the backlight brightness



fn + S


## Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.

## Watch The Building Tutorial On Our Website

If you are building the keyboard for the first time, we highly recommend you watch the building tutorial video on our website first, then start building the keyboard yourself.

## Factory Reset

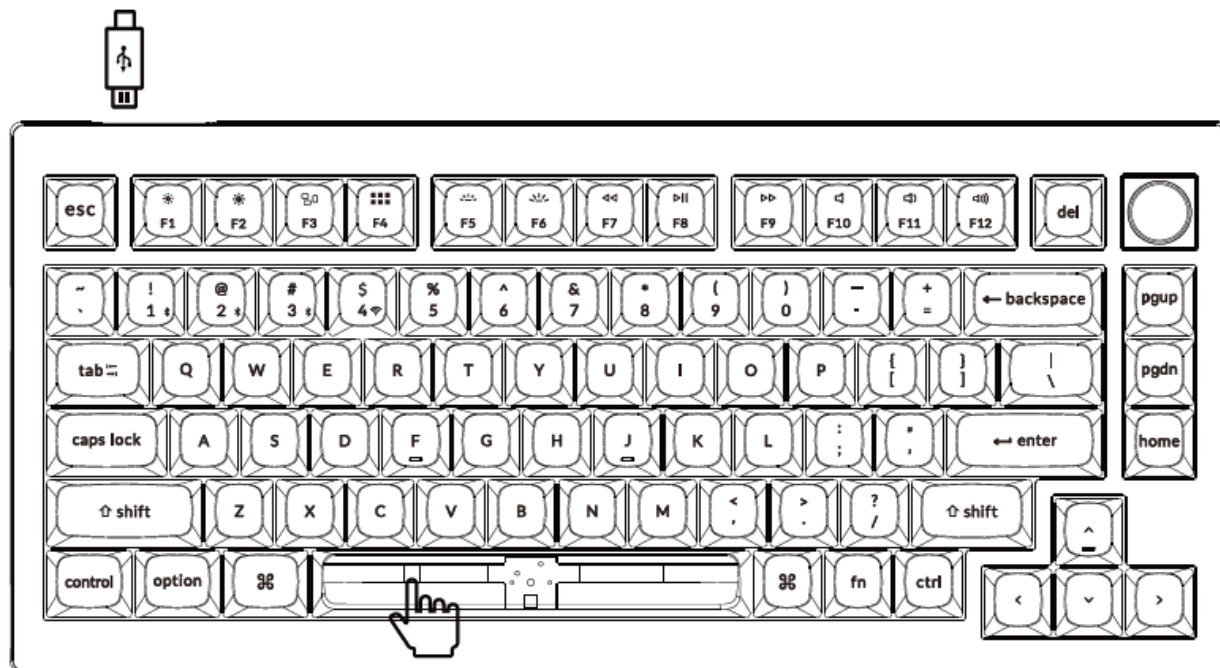

### Troubleshooting? Don't know what's going on with the keyboard?


1. Download the right firmware and QMK Toolbox from our website.
2. Unplug the power cable and switch the keyboard to Cable mode.
3. Remove the space bar keycap to find the reset button on the PCB.
4. Hold the reset key first, then plug the power cable into the keyboard. Release the reset key after 2 seconds, and the keyboard will now enter DFU mode.
5. Flash the firmware with the QMK Toolbox.
6. Factory reset the keyboard by pressing fn + J + Z (for 4 seconds). Step by step guide can be found on our website

Not Happy

[support@keychron.com](mailto:support@keychron.com)

---

## Documents / Resources

|   |   |
|---|---|
|  | <a href="#">Keychron V1 Max Mechanical Keyboard [pdf] User Guide</a><br>V1 Max, V1 Max Mechanical Keyboard, Mechanical Keyboard, Keyboard |
|---|---|