

Kinan KCM-4200P USB DisplayPort KVM Adapter User Manual

Home » Kinan » Kinan KCM-4200P USB DisplayPort KVM Adapter User Manual

Contents

- 1 Kinan KCM-4200P USB DisplayPort KVM Adapter
- **2 Product Usage Instructions**
- **3 Product Overview**
- **4 Connection Diagram**
- **5 Specifications**
- 6 More info
- **7 Frequently Asked Questions**
- 8 Documents / Resources
 - 8.1 References



Kinan KCM-4200P USB DisplayPort KVM Adapter



Specifications:

• Model: KCM-4200P

• Connector: 1x USB type A, 1x DisplayPort (male), 1x RJ-45 (Female)

• LED: Steady green light, Steady orange and green lights

• Environmental Requirements:

Operating Temperature: 0-50°C

• Store Temperature: -20-60°C

Humidity: 0-80%RH, Non-condensing

Material: PlasticPhysical Features:

∘ Cable Length: DP - 150 mm (Including DP connector), USB - 300 mm

• Weight: 90g

Dimension: 106mm x 45mm x 21.7mm

Product Usage Instructions

Connection Instructions:

- 1. Ensure the cable used to connect the dongle is a Category 5e (shielded) CAT5/6 network cable.
- 2. Connect the dongle to the PC or server using the appropriate ports (USB, DisplayPort, RJ-45).
- 3. Observe the LED lights on the dongle for status indication.


LED Light Indicators:

• RJ45-LED Light:


- Green Light Always On: Indicates the connected PC or server is powered on and connected to the KVM.
- Orange and Green Lights Always On: Indicates that the connected PC or server is in use.

Product Overview



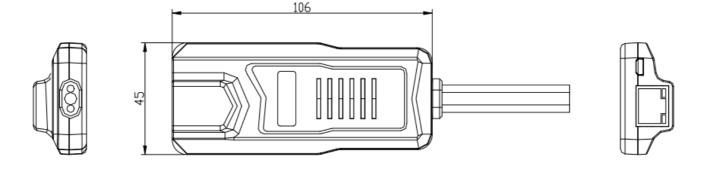

Connection Diagram

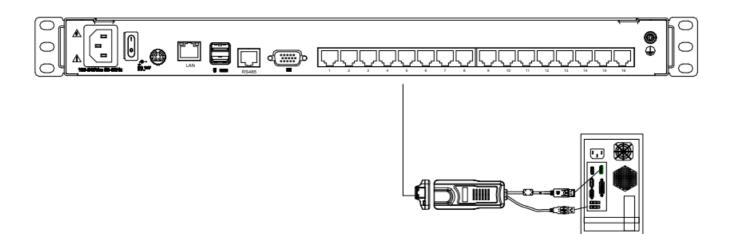

Explanation:

• The cable used to connect the dongle must be a Category 5e (shielded) CAT5/6 network cable

RJ45-LED light on the dongle:

- Green light is always on: Indicates that the PC or server that is connected to this dongle has been connected to the KVM and is powered on.
- Orange and green lights are always on: Indicates that the PC or server that is connected to this dongle is in use.

Specifications

Model			KCM-4200P
Connector	Input	USB	1x USB type A
		DP	1x DisplayPort (male)
	Output		1x RJ-45 (Female)
LED	Connected		Steady green light
	Online		Steady orange and green lights
Environment Require ments	Operating Temperature		0-50°C
	Store Temperature		-20-60°C
	Humidity		0-80%RH, Non-condensing
Physical Features	Material		Plastic
	Cable Length		DP: 150 mm (Including DP connector) USB: 300 mm
	Weight		90g
	Dimension		106mm x 45mm x 21.7mm

More info

• www.kinankvm.com

Frequently Asked Questions

- Q: What type of network cable should be used to connect the dongle?
 - A: The cable used to connect the dongle must be a Category 5e (shielded) CAT5/6 network cable.
- Q: What do the LED lights on the dongle indicate?
 - A: The green light indicates the PC or server is connected and powered on, while orange and green lights indicate the PC or server is in use.

Documents / Resources



Kinan KCM-4200P USB DisplayPort KVM Adapter [pdf] User Manual

KCM-4200P, KVM-1508XX, KVM-1516XX, KVM-1708XX, KVM-1716XX, KCM-4200P USB DisplayPort KVM Adapter, USB DisplayPort KVM Adapter, DisplayPort KVM Adapter, KVM Adapter

References

- Kinan | Professional & High-quality KVM Switch, KVM Console, KVM over IP
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.