



**King Supply
38212-SPK
Push Button
Shower
Panel**



King Supply 38212-SPK Push Button Shower Panel Installation Guide

[Home](#) » [King Supply](#) » King Supply 38212-SPK Push Button Shower Panel Installation Guide 

Contents

- [1 King Supply 38212-SPK Push Button Shower Panel](#)
- [2 SPECIFICATIONS](#)
- [3 CONNIECTIONS & DIMENSIONIS](#)
- [4 PRODUCT FEATURES](#)
- [5 DIAGRAM](#)
- [6 Documents / Resources](#)
 - [6.1 References](#)
- [7 Related Posts](#)



King Supply 38212-SPK Push Button Shower Panel



GENERAL INFORMATION

This Push Button Presto Shower Valve is designed with a self-closing metering valve that requires manual push button activation. The valve is installed as a concealed wall mount and is constructed from lead-free solid brass with a chrome plated finish.

WARRANTY INFORMATION

Warranty: 15 Year Warranty

Made in Italy

PRODUCT USAGE INSTRUCTIONS

1. Locate the concealed wall mount installation area for the Push Button Presto Shower Valve.
2. Connect the valve to the water supply using the provided 3/4 MPT adapters for both the inlet and outlet connections.
3. Secure the valve in place and ensure a tight fit.
4. Adjust the escutcheon plate to cover any gaps around the valve.
5. Your Push Button Presto Shower Valve is now ready for use.

SPECIFICATIONS

Push Button Shower Panel ASME/CSA 102mm (Fixed Time) Concealed self-closing mixer

GENERAL INFORMATION

- **Valve Type:** Self Closing Metering Valve

- **Valve Activation:** Manual Push Button Valve
- **Installation Type:** Concealed Wall Mount
- **Body Material:** Lead Free Solid Brass
- **Finish Type:** Chrom1e Plated Finish




CONNECTIONS & DIMENSIONIS

- **Connection Inlet:** 3/4" FPT (1/2" MPT Adapters included)
- **Connection Outlet:** 3/4" MPT (1/2" MPT Adapters included)
- **Panel Width:** 5.311 (135mm)
- **Panel Height:** 41.311 (1050mm)

PRODUCT FEATURES

- **Time Adjustable:** No, 30 Seconds
- **Temperature Adjustable,:** No
- **Working Temperature Range:** 40 Degrees F – 170 Degrees F
- **Built-in Premix:** No
- Lead Free and Corrosion Resistant
- **Vandal Resistant::** reduces tampering and risk of Hooding
- Water Saving Up To 85%!

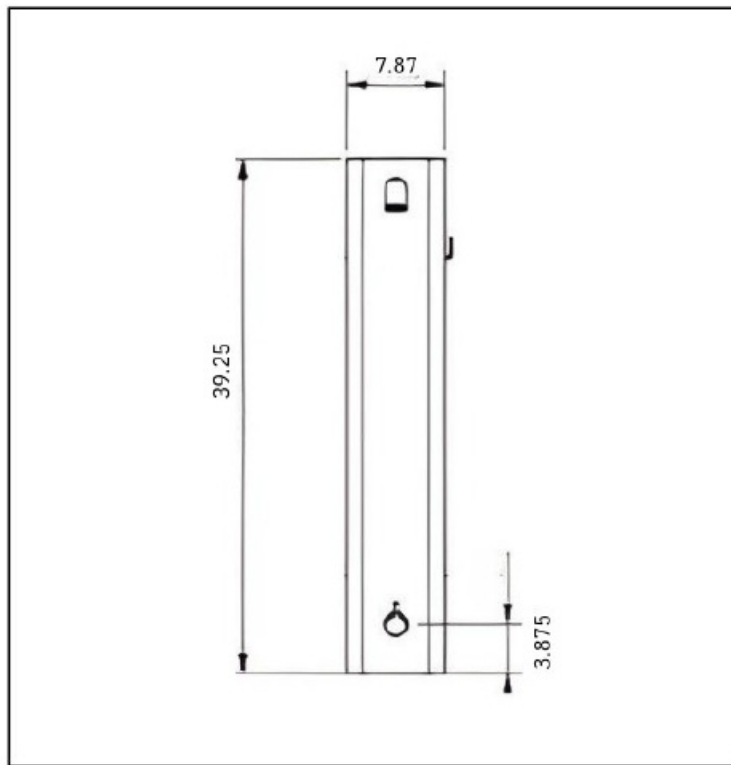

WHAT'S INCLUDED

- Push Button Shower Valve
- Shower Panel
- Shower Head
- Long Braided Supply Line(36 in)
- Phillips Pan Head Screws With Plastic Anchors (1 1/2 in)
- Adapters With Washers (3/4" FPT x 1/2" MPT)
- Filter Screen (3/4 in)

Certificate

	40-170 °F		3/4" FPT
	0.5-6 bar 2-4 bar (Recommended)		ADA Compliant CSA B125.1 ASME A112.18.1
	15 l/min (3 bar)		

GENERAL INFORMATION

- **Shower Head Type:** Fixed Jet
- **Body Material:** Lead free Solid Brass
- **Finish Type:** Chrome Plated Finish




CONNECTIONS & DIMENSIONS

- **Connection Inlet:** 1/2 MPT
- **Height:** 1.7511 (45 mm)
- **Length:** 3.111 (76mm)
- **Width:** 1.4111 (35mm)

PRODUCT FEATURES

- Working Temperature Range: 40 Degrees F- 160 Degrees F
- Lead free and Corrosion Resistant
- Ligature Resistant Anti-suicide
- No Wall Mounting Screws Necessary

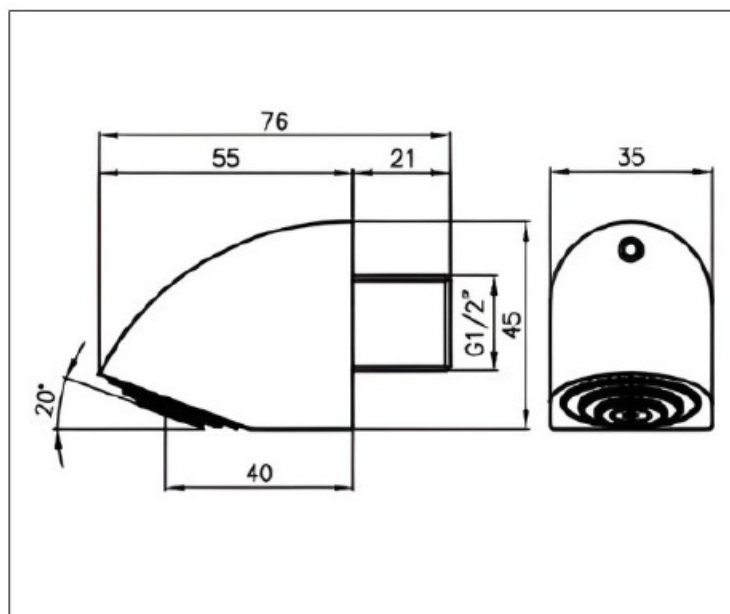

WHAT'S INCLUDED


Shower Head

Certificate

 40-160 °F	 1/2" MPT
 0.5-6 bar	 EN 12540, EN 1982, EN 12164, EN 12165, ISO 9227
 10 l/min (3 bar)	 ADA COMPLIANT 15 Year Warranty

DIAGRAM

Ligature Resistant Shower Head (Adjustable)
Anti ligature shower head with adjustable jet

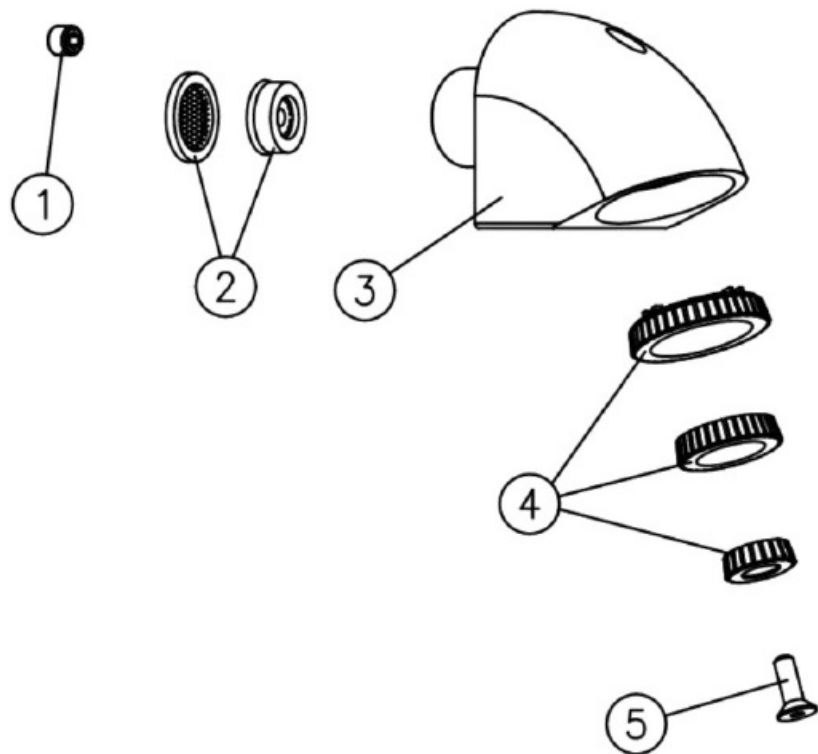

Position	Description
1	Grain
2	Filter & Flow Control
3	Body
4	3 Ring Kit
5	Screw

GENERAL INFORMATION

- **Valve Type:** Self Closing Metering Valve
- **Valve Activation:** Manual Push Button Valve
- **Installation Type:** Concealed Wall Mount
- **Body Material:** Lead Free Solid Brass
- **Finish Type:** Chrome Plated Finish


CONNECTIONS & DIMENSIONS

- **Connection Inlet:** 3/4" MPT (3/4" MPT Adapters included)
- **Connection Outlet:** 3/4" MPT (3/4" MPT Adapters included)
- **Escutcheon Plate Diameter:** 5.1" (130mm)
- **Valve Body Length:** 4" (102mm)



PRODUCT FEATURES

- **Time Adjustable:** No, 30 Seconds
- **Temperature Adjustable:** No
- **Working Temperature Range:** 40 Degrees F – 170 Degrees F
- **Built-in Premix:** No
- Lead Free and Corrosion Resistant
- **Vandal Resistant:** reduces tampering and risk of flooding
- Water Saving Up To 85%!

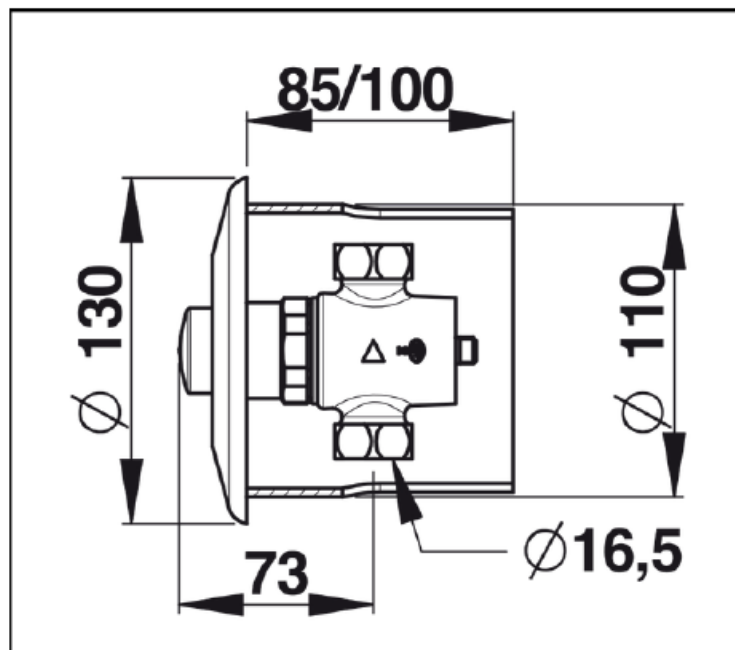

WHAT'S INCLUDED

- Push Button Shower Valve
- Rosette Plate (5 in Diameter)
- Rough-In
- Filter Screen (3/4 in)
- Paper Washer (3/4 in)
- Adapters With Washers (3/4 in FPT x 3/4 in MPT)

Certificate

	40-170 °F		3/4" MPT
	1-5.5 bar		EN 12540, EN 1982, EN 12164, EN 12165, ISO 9227
	10 l/min (3 bar)		ADA COMPLIANT ASME A112.18.1 CSA B125.1 15 Year Warranty

- KING SUPPLY COMPANY
- 16 WHITINS RD
- SUTTON, MA 01590
- 1 [866-352-6652](tel:866-352-6652)
- INFO@KINGSUPPLY.COM

FREQUENTLY ASKED QUESTIONS (FAQ)

- Q: Can the time and temperature be adjusted on the Push Button Presto Shower Valve?

- A: The time is fixed at 30 seconds, and the temperature is also fixed and cannot be adjusted.
- **Q: Is the Push Button Presto Shower Valve vandal resistant?**
 - A: Yes, the valve is designed to be vandal resistant to reduce tampering and the risk of flooding.

Documents / Resources

	King Supply 38212-SPK Push Button Shower Panel [pdf] Installation Guide 38212, 38212-SPK Push Button Shower Panel, 38212-SPK, Push Button Shower Panel, Button Shower Panel, Shower Panel, Panel
---	---

References

- [User Manual](#)

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.