

KINGSTON FURY Beast DDR4 RGB Memory Instructions

[Home](#) » [Kingston](#) » KINGSTON FURY Beast DDR4 RGB Memory Instructions 



Contents

- [1 KINGSTON FURY Beast DDR4 RGB Memory Instructions](#)
- [2 DESCRIPTION](#)
- [3 FACTORY TIMING PARAMETERS](#)
- [4 SPECIFICATIONS](#)
- [5 FEATURES](#)
- [6 MODULE DIMENSIONS](#)
- [7 Documents / Resources](#)
 - [7.1 References](#)
- [8 Related Posts](#)

KINGSTON FURY Beast DDR4 RGB Memory Instructions



KF432S20IB/8
8GB 1G x 64-Bit
DDR4-3200 CL20 260-Pin SODIMM

DESCRIPTION

Kingston FURY KF432S20IB/8 is a 1G x 64-bit (8GB) DDR4-3200 CL20 SDRAM (Synchronous DRAM) 1Rx8, memory module, based on eight 1G x 8-bit FBGA components per module. Each module kit supports Intel® Extreme Memory Profiles (Intel® XMP) 2.0. Each module has been tested to run at DDR4-3200 at a low latency timing of 20-22-22 at 1.2V. Additional timing parameters are shown in the Plug-N-Play (PnP) Timing Parameters section below. The JEDEC standard electrical and mechanical specifications are as follows:

Note: The PnP feature offers a range of speed and timing options to support the widest variety of processors and chipsets. Your maximum speed will be determined by your BIOS.

FACTORY TIMING PARAMETERS

- Default (Plug N Play): DDR4-3200 CL20-22-22 @1.2V
- XMP Profile #1: DDR4-3200 CL20-22-22 @1.2V
- XMP Profile #2: DDR4-2933 CL17-19-19 @1.2V

SPECIFICATIONS


CL(IDD)	20 cycles
Row Cycle Time (tRCmin)	45.75ns(min.)
Refresh to Active/Refresh Command Time (tRFCmin)	350ns(min.)
Row Active Time (tRASmin)	26.25ns(min.)
UL Rating	94 V - 0
Operating Temperature	0° C to +85° C
Storage Temperature	-55° C to +100° C

FEATURES


- Power Supply: VDD = 1.2V Typical
- VDDQ = 1.2V Typical
- VPP = 2.5V Typical
- VDDSPD = 2.2V to 3.6V
- On-Die termination (ODT)

- 16 internal banks; 4 groups of 4 banks each
- Bi-Directional Differential Data Strobe
- 8 bit pre-fetch
- Burst Length (BL) switch on-the-fly BL8 or BC4(Burst Chop)
- Height 1.18" (30.00mm)

MODULE DIMENSIONS

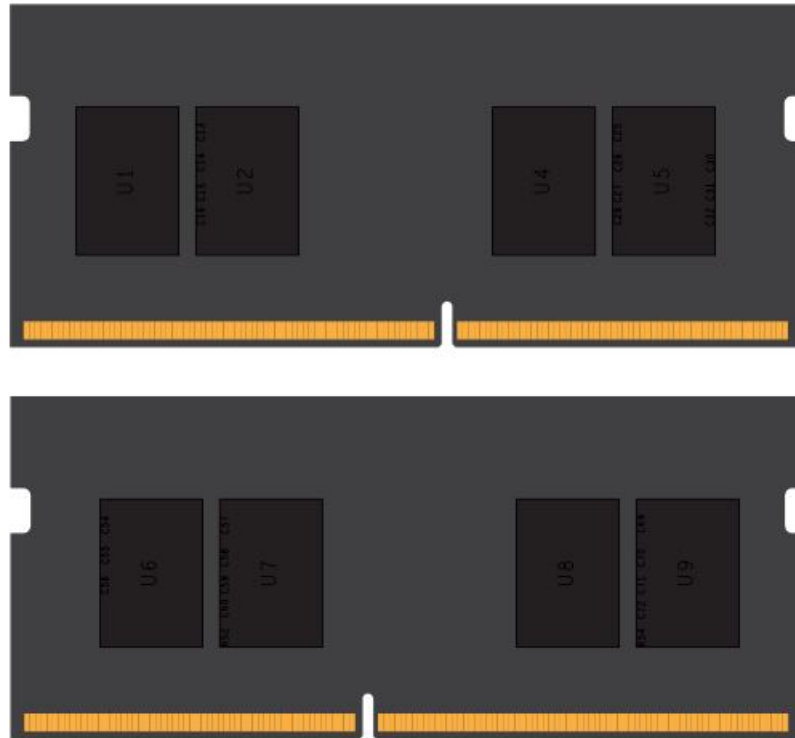

All measurements are in millimeters.
 (Tolerances on all dimensions are ± 0.12 unless otherwise specified)

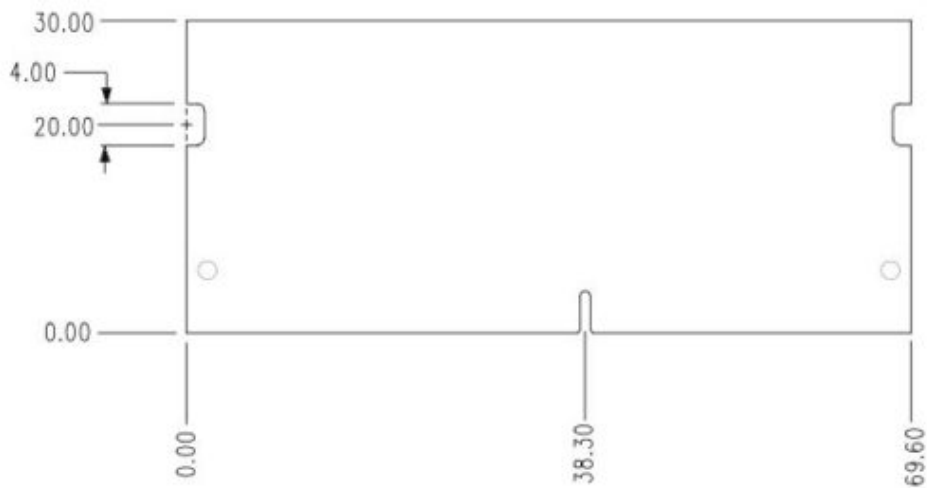

The product images shown are for illustration purposes only and may not be an exact representation of the product. Kingston reserves the right to change any information at anytime without notice.

FOR MORE INFORMATION, GO TO [KINGSTON.COM](https://www.kingston.com)


All Kingston products are tested to meet our published specifications. Some motherboards or system configurations may not operate at the published Kingston FURY memory speeds and timing settings. Kingston does not recommend that any user attempt to run their computers faster than the published speed. Overclocking or modifying your system timing may result in damage to computer components.

©2022 Kingston Technology Corporation, 17600 Newhope Street, Fountain Valley, CA 92708 USA. All rights reserved. Kingston FURY and the Kingston FURY logo are trademarks of Kingston Technology Corporation.

All trademarks are the property of their respective owners.

Read More About This Manual & Download PDF:

Documents / Resources



[KINGSTON FURY Beast DDR4 RGB Memory](#) [pdf] Instructions
FURY, Beast DDR4 RGB Memory, DDR4 RGB Memory, FURY, RGB Memory

References

-  [SSDs, DRAM, Memory Cards and USB Flash Drives for Personal, Business and Enterprise Use - Kingston Technology](#)