

DazzlingStage ZQ06190

DazzlingStage 60W 9LED RGBW Stage Wall Wash Bar Light

MODEL: ZQ06190 USER MANUAL

1. Important Safety Instructions

Please read and understand all instructions before installing or operating this product. Keep this manual for future reference.

- **Electrical Safety:** Ensure the power supply voltage matches the product's requirements. Disconnect power before any service or maintenance.
- **Ventilation:** Do not block ventilation openings. Ensure adequate airflow around the fixture to prevent overheating.
- **Mounting:** Securely mount the fixture using appropriate hardware. Ensure the mounting surface can support the weight of the fixture.
- **Environment:** This product is intended for indoor use. Avoid exposure to water, high humidity, or extreme temperatures.
- **Eye Safety:** Do not stare directly into the light source when the fixture is operating, as it may cause eye damage.

2. Product Overview

The DazzlingStage ZQ06190 is a 60W 9LED RGBW stage wall wash bar light designed for various lighting applications. It features multiple control modes and a versatile design for flexible placement.

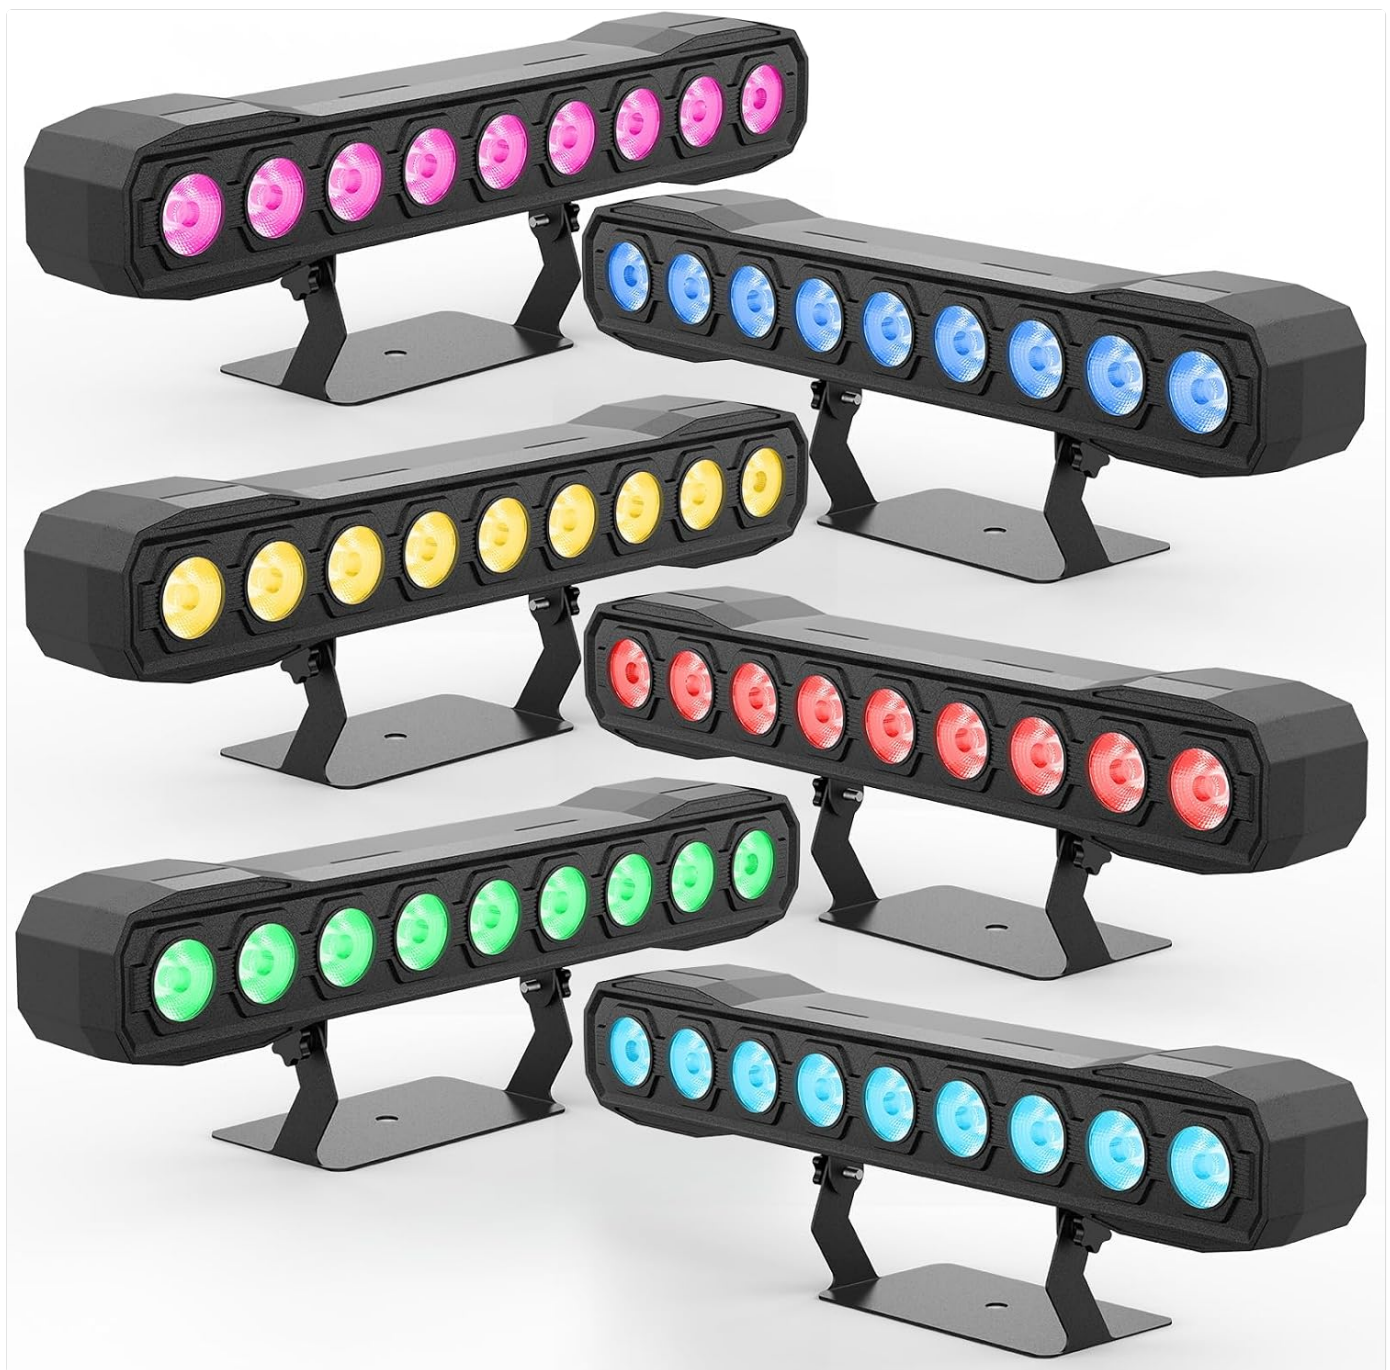


Image 2.1: Multiple DazzlingStage ZQ06190 units showcasing different color outputs.

Key Features:

- **Powerful Illumination:** Equipped with 9 LED RGBW light sources, capable of producing over 16.7 million color combinations.
- **Smooth Dimming:** Supports 0-100% linear dimming for precise light intensity control.
- **Multiple Control Modes:** Includes DMX512, auto, sound control, and remote control for versatile operation.
- **Dynamic Lighting Effects:** Features jumping, gradual changing, pulse changing, and colorful mixing effects.
- **Adjustable Stand:** Unique stand design allows for upright placement on flat surfaces and adjustable illumination direction. Also supports traditional hanging.



Image 2.2: Overview of the light bar's capabilities and control options.

Package Contents:

Verify that all items are present upon unpacking:

- Light Bar (ZQ06190)
- Power Cord
- Remote Control
- Bracket (pre-attached or separate)
- Knobs (for bracket adjustment)
- Black Gaskets
- Instruction Manual



Image 2.3: Contents included in the product package.

3. Setup and Installation

Mounting Options:

The ZQ06190 offers flexible mounting options:

- **Surface Placement:** Use the integrated stand to place the light bar upright on any flat surface. The stand allows for angle adjustment.
- **Hanging Installation:** The bracket can be inverted and used with appropriate clamps (not included) to hang the fixture from a truss or ceiling. Ensure all connections are secure.

Stand, Rotate, and Adjust Lighting Direction Freely

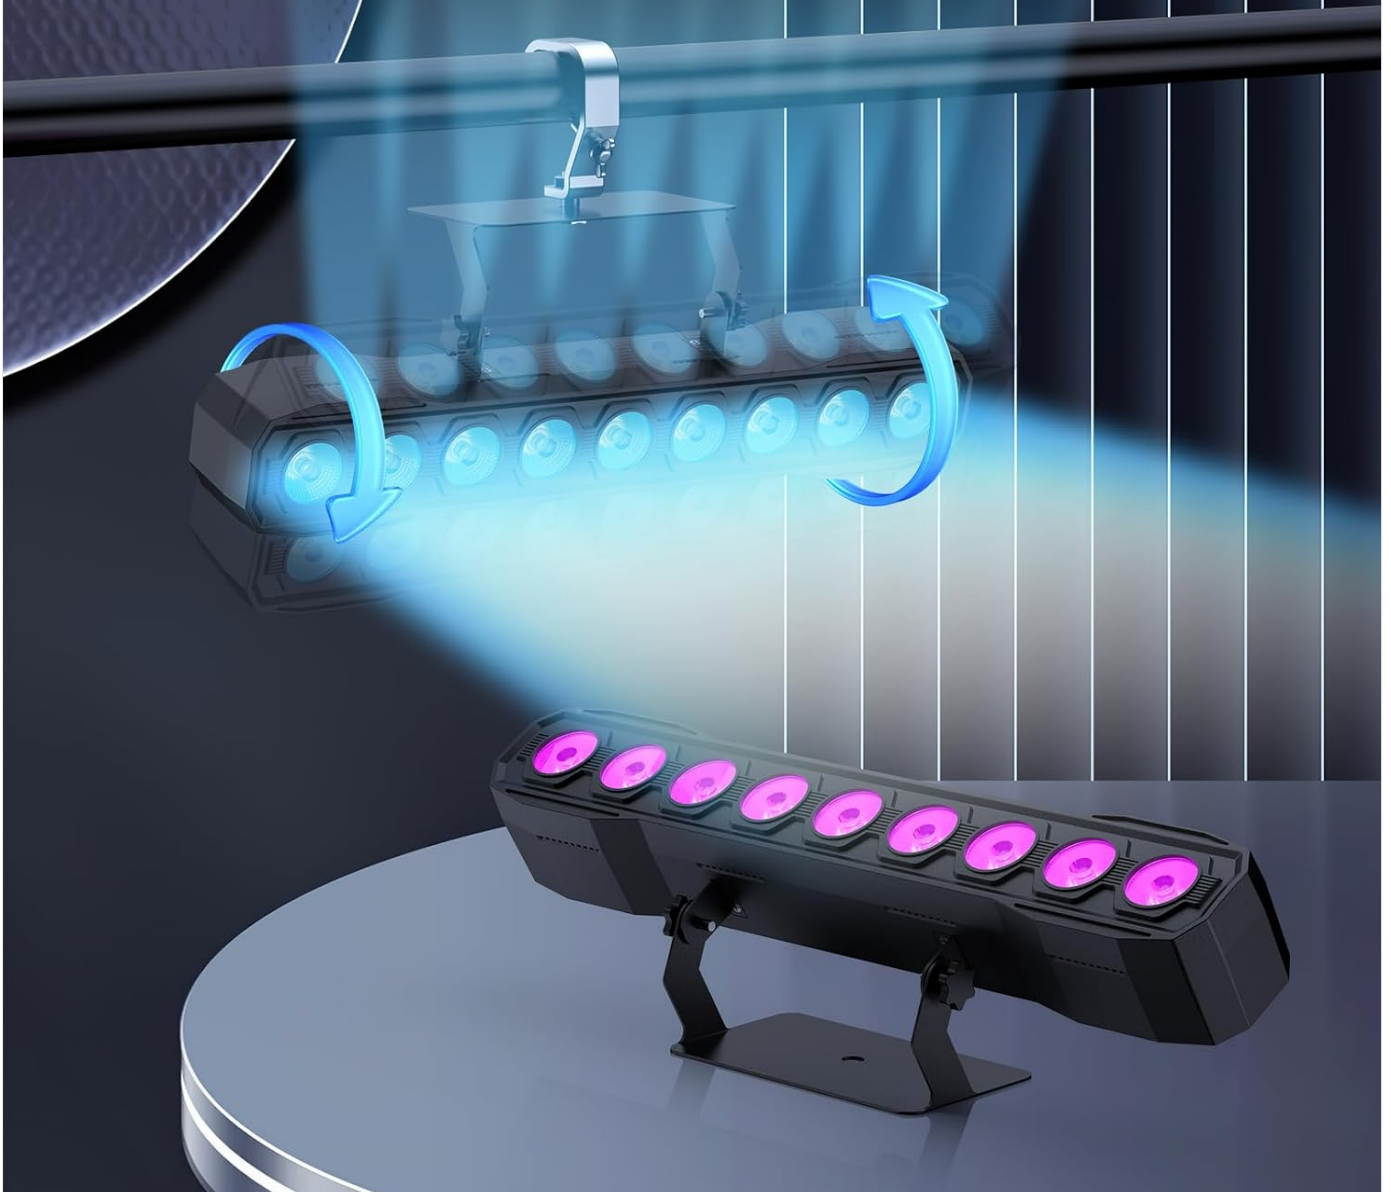


Image 3.1: Illustration of the adjustable stand and hanging capabilities.

Connections:

- **Power:** Connect the provided power cord to the power input on the fixture and then to a suitable power outlet.
- **DMX (Optional):** For DMX control, connect a DMX controller to the DMX IN port. For multiple units, daisy-chain them using DMX OUT to DMX IN connections.



Image 3.2: Detailed view of the control panel and connection ports.

4. Operating Modes

The ZQ06190 offers several operating modes, selectable via the onboard display or remote control.

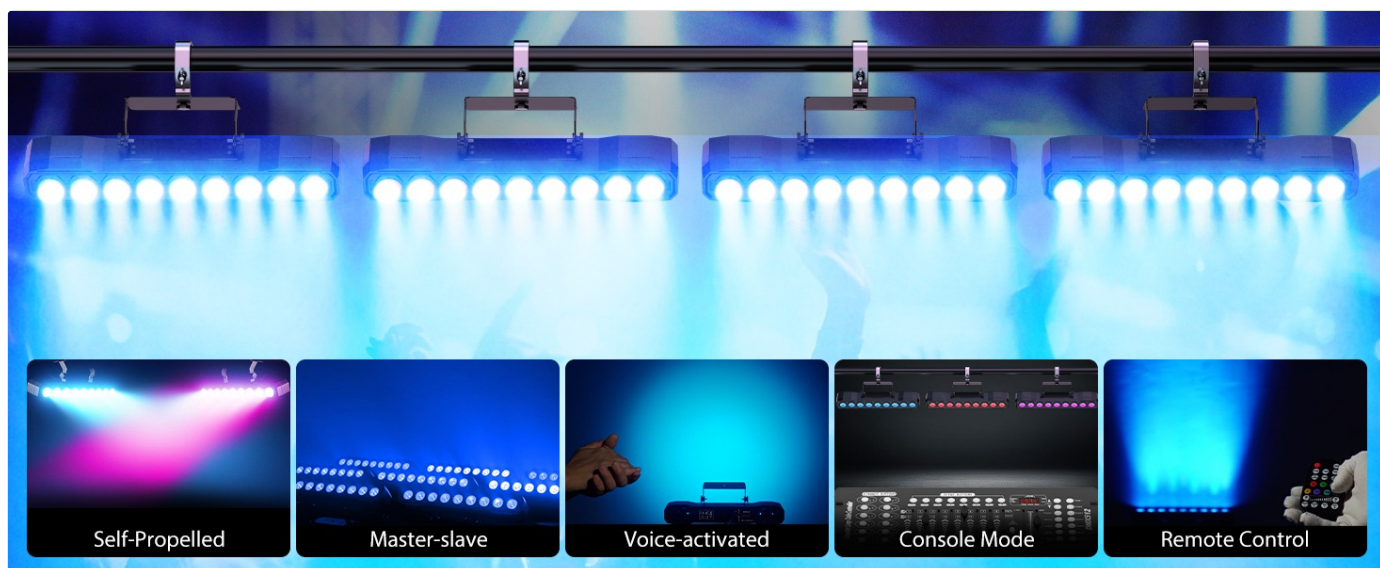


Image 4.1: Overview of available control modes.

4.1. Remote Control Operation

The included remote control provides convenient access to various functions.

Multifunctional Design with Remote Control



9 Brightness Levels



4 Versatile Color Mixing Modes



7 Static Colors

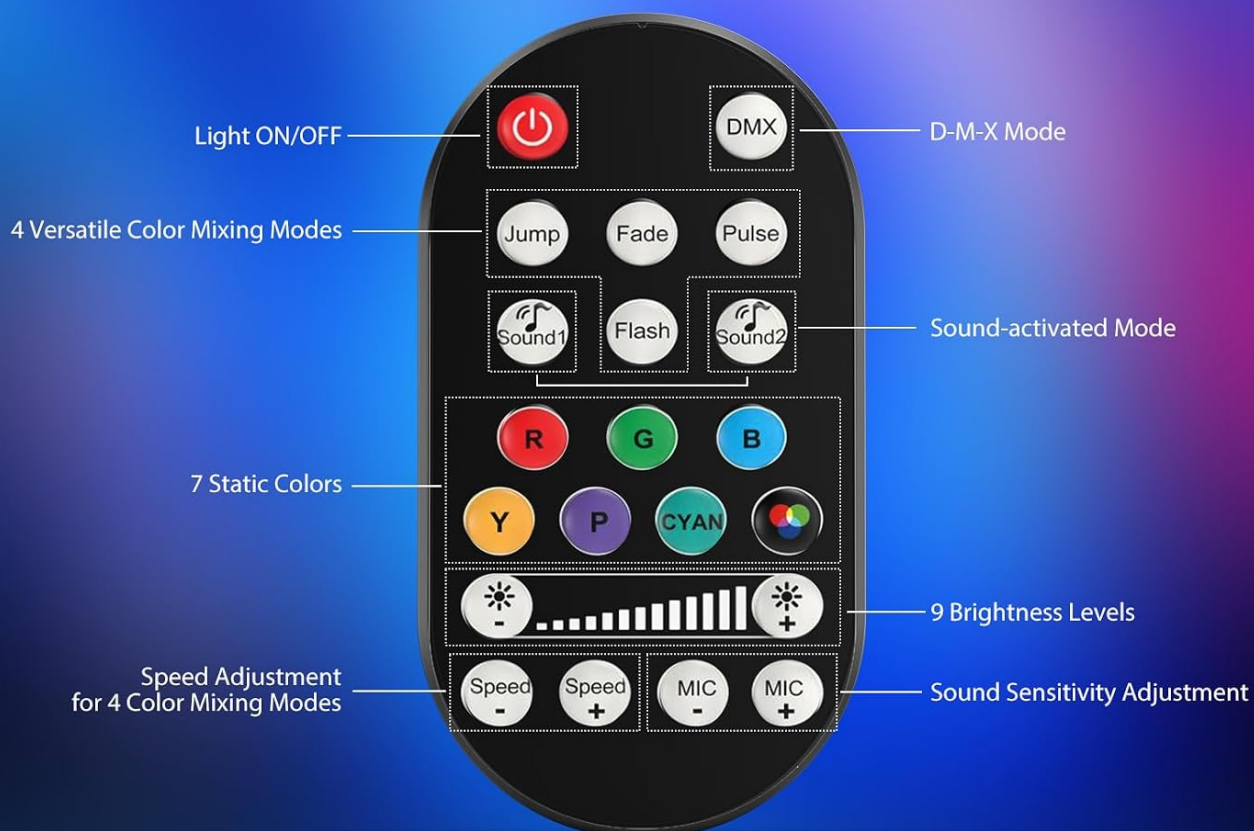


Image 4.2: Remote control button functions.

- **Light ON/OFF:** Power button.
- **DMX Mode:** Activates DMX control.
- **Versatile Color Mixing Modes:** Buttons for Jump, Fade, Pulse, Sound1, Flash, Sound2.
- **Static Colors:** Direct buttons for Red, Green, Blue, Yellow, Purple, Cyan, and a multi-color button.
- **Brightness Levels:** Adjusts light intensity (9 levels).
- **Speed Adjustment:** For color mixing modes.
- **Sound Sensitivity Adjustment:** For sound-activated modes (15 levels).

4.2. DMX512 Control

For advanced control, connect a DMX512 controller. Refer to the fixture's display menu for DMX address setting and channel assignments. The fixture typically uses 4 or 8 DMX channels.

4.3. Auto Mode

The light bar will cycle through pre-programmed lighting effects automatically.

4.4. Sound-Activated Mode

The light bar will react to ambient sound, changing patterns and colors in sync with music or other audio. Sensitivity can be adjusted.



Image 4.3: Examples of dynamic lighting effects.

5. Maintenance

Regular maintenance ensures optimal performance and longevity of your light bar.

- **Cleaning:** Periodically clean the lens and exterior casing with a soft, lint-free cloth. Do not use abrasive cleaners or solvents.
- **Inspection:** Regularly check power cables, DMX cables, and mounting hardware for any signs of wear or damage. Replace damaged components immediately.
- **Storage:** When not in use for extended periods, store the fixture in a dry, dust-free environment.

6. Troubleshooting

If you encounter issues, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on	No power, faulty cable, remote battery dead	Check power connection, test cable, replace remote battery.
Remote control not working	Battery dead, obstruction, remote out of range	Replace remote battery, ensure clear line of sight, operate within range.
DMX control issues	Incorrect DMX address, faulty cable, DMX terminator missing	Verify DMX address, check DMX cables, ensure terminator is used on the last fixture.
Sound-activated mode unresponsive	Low sound sensitivity, no sound input	Increase sound sensitivity via remote/menu, ensure music is playing near the fixture.

7. Specifications

Feature	Detail
Model Number	ZQ06190
Brand	DazzlingStage
Power Consumption	60W
Light Source	9 x RGBW LEDs
Color Mixing	RGBW 4-in-1, 16.7M+ colors
Dimming	0-100% Linear
Beam Angle	35°
Control Modes	DMX512, Auto, Sound-Activated, Remote Control, Master-Slave
DMX Channels	4/8 Channels (refer to product for specific DMX chart)
Material	Acrylonitrile Butadiene Styrene (ABS)
Product Dimensions	18.1 x 5.5 x 5.1 inches (46 x 14 x 13 cm)
Item Weight	Approximately 1.98 lbs (0.9 kg)



Image 7.1: Product dimensions and weight.

8. Limited Warranty and Support

This product is manufactured under strict quality standards. For warranty information, technical support, or service inquiries, please contact the seller or manufacturer directly. Keep your purchase receipt as proof of purchase.

Optional protection plans may be available for extended coverage. Please refer to your purchase details for more information on these plans.

© 2025 DazzlingStage. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question

and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question