

# **KOHLER K-1821 Underscore Drop-in Bath Owner's Manual**

Home » Kohler » KOHLER K-1821 Underscore Drop-in Bath Owner's Manual

# Contents

- 1 KOHLER K-1821 Underscore Drop-in Bath
- **2 Product Information**
- 3 FAQ
- **4 Features**
- 5 Installation
- **6 Dimension**
- **7 Technical Information**
- 8 Documents / Resources
  - 8.1 References
- 9 Related Posts



**KOHLER K-1821 Underscore Drop-in Bath** 



# **Product Information**

# **Specifications**

• **Model:** 66 x 32 drop-in bath K-1821

Material: Not specifiedWeight: 86 lbs (39 kg)

• Water Depth: 18" (457 mm)

• Water Capacity: 85.8 gal (324.8 L)

• Basin Area (Bottom): 44-1/2 x 22-5/16 (1130 mm x 567 mm)

• **Basin Area (Top):** 59-5/8 x 25-1/2 (1514 mm x 648 mm)

• **Cutout:** Drop-in, 64-1/2 x 30-1/2 (1638 mm x 775 mm)

• Drain Location: Reversible

# **Features**

- · Drop-in installation
- Drain sold separately

# **Required Products/Accessories**

• K-7271 Brass Slotted Overflow Bath Drain or K-7272 PVC Slotted Overflow Bath Drain

# **Recommended Products/Accessories**

- K-550 Under-Mount Installation Kit
- K-1491 Bath/Whirlpool Pillow
- K-1601 Bath/Whirlpool Footstop, Removable

- K-1177 Vinyl Tiling-in Bead
- K-23726 Drain Treatment
- K-23732 Tub & Shower Cleaner
- K-31797 Slotted Overflow Bath Drain Kit
- K-31795 Slotted Overflow Above-the-Floor Bath Drain Kit

#### Installation

- 1. Measure your actual product for rough-in details.
- 2. Install the product according to the provided installation instructions.
- 3. The hot water supply should be at least 70% of the bath's capacity.
- 4. The kit is required for under-mount installations (sold separately).

# Codes/Standards

CSA B45.5/IAPMO Z124, ASTM E162, ASTM E662, UL 1795, CSA C22.2 No. 218.2, IAPMO Certification, UL Listed

#### **Available Colors/Finishes**

Color tiles are intended for reference only.

# **Color Code Description:**

- 0 White
- 96 Biscuit
- NY Dune
- 95 IceTM Grey
- 58 ThunderTM Grey
- 7 Black BlackTM

#### **Technical Information**

- · All product dimensions are nominal.
- Minimum flat for door: 2-7/16 (61 mm)

# **Notes**

· Installations will vary.

# **FAQ**

Q: What is the water capacity of the bath?

A: The water capacity is 85.8 gallons (324.8 liters).

#### Q: Are the drain and installation kits included?

A: The drain is sold separately, and the under-mount installation kit is recommended but sold separately.

# Q: Is the product reversible for drain location?

**A:** Yes, the product has a reversible drain location.

#### **Features**

- Integral lumbar support
- · Slotted overflow allows for deep soaking

#### **Material**

Acrylic

# Installation

- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately)
- Drop-in or undermount

# **Required Products/Accessories**

- K-7271 Brass Slotted Overflow Bath Drain
- 01
- K-7272 PVC Slotted Overflow Bath Drain

# **Recommended Products/Accessories**

- K-550 Under-Mount Installation Kit
- K-1491 Bath/Whirlpool Pillow
- K-1601 Bath/whirlpool footsteps, removable
- K-1177 Vinyl Tiling-in Bead
- K-23726 Drain treatment
- K-23732 Tub & shower cleaner
- K-31797 Slotted overflow bath drain kit
- K-31795 Slotted overflow above-the-floor bath drain kit

#### Codes/Standards

- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- UL 1795

- CSA C22.2 No. 218.2
- IAPMO Certification
- UL Listed


# **KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty**

• See the website for detailed warranty information.


# **Available Colors/Finishes**

• Color tiles intended for reference only

# **Color Code Description**



# **Dimension**

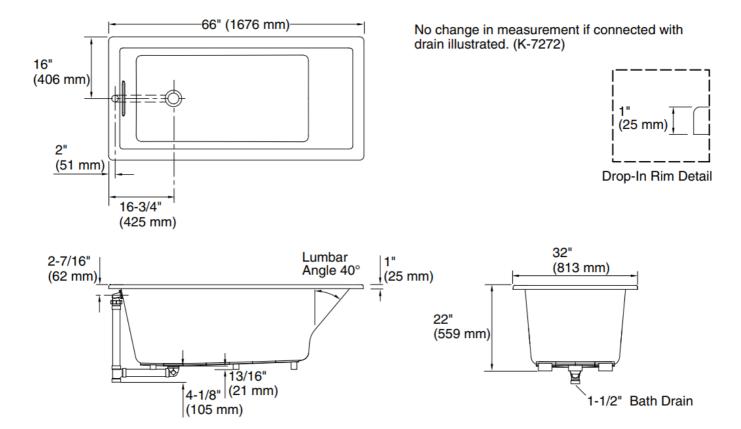

### **Technical Information**

· All product dimensions are nominal.

• Drain location: Reversible

• Basin area, bottom: 44-1/2" x 22-5/16" (1130 mm x 567 mm)

• **Basin area, top:** 59-5/8" x 25-1/2" (1514 mm x 648 mm)

• Weight: 86 lbs (39 kg)

• Minimum floor load: 50 lbs/ft² (244.1 kg/m²)

• Water depth: 18" (457 mm)

• Water capacity: 85.8 gal (324.8 L)

• **Cutout:** Drop-in, 64-1/2" x 30-1/2" (1638 mm x 775 mm)

• Minimum flat for the door: 2-7/16" (61 mm)

#### **Notes**

- Measure your actual product for rough-in details.
- Install this product according to the installation instructions.
- The hot water supply should be 70% of the capacity of the bath or greater.
- · Installations will vary.
- The kit is required for under-mount installations (sold separately).

# 1-800-4KOHLER (1-800-456-4537)

- Kohler Co. reserves the right to make revisions without notice to product specifications.
- For the most current Specification Sheet, go to <u>www.kohler.com</u> USA or <u>www.kohler.ca</u> Canada 2-28-2024
  21:14 US

# **Documents / Resources**



KOHLER K-1821 Underscore Drop-in Bath [pdf] Owner's Manual K-1821 Underscore Drop-in Bath, K-1821, Underscore Drop-in Bath, Drop-in Bath, Bath

# References

- K Toilets, Showers, Sinks, Faucets and More for Bathroom & Kitchen | KOHLER
- User Manual

#### Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.