

KOLINK Unity Nexus ARGB Midi Tower Case User Manual


[Home](#) » [KOLINK](#) » KOLINK Unity Nexus ARGB Midi Tower Case User Manual 







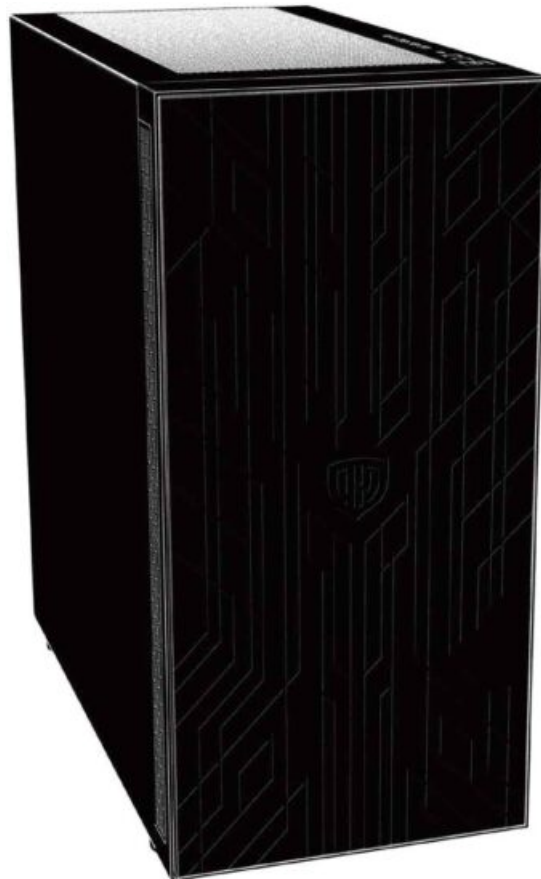


Contents

- 1 KOLINK Unity Nexus ARGB Midi Tower Case User Manual
- 2 1. ACCESSORY PACK CONTENTS
- 3 2. PANEL REMOVAL
- 4 3. MOTHERBOARD INSTALLATION
- 5 4. POWER SUPPLY INSTALLATION
- 6 5. GRAPHICS CARD/PCI-E CARD INSTALLATION
- 7 6. 2.5" SSD INSTALLATION (R)
- 8 7. 2.5" SSD INSTALLATION (R)
- 9 8. 3.5" HDD INSTALLATION
- 10 9. TOP FAN INSTALLATION
- 11 10. FRONT/REAR FAN INSTALLATION
- 12 11. WATERCOOLING RADIATOR INSTALLATION
- 13 12. I/O PANEL INSTALLATION
- 14 Documents / Resources
- 15 Related Posts

KOLINK Unity Nexus ARGB Midi Tower Case User Manual




1. ACCESSORY PACK CONTENTS

x18  Motherboard/SSD Screws	x3  Motherboard Stand-off	x4  PSU Screw	x8  3.5" Drive Screw
x8  Fan Screw	x5  Cable Tie	x8  Watercooling Screw	

2. PANEL REMOVAL


- **Left Panel** – Unscrew the two thumbscrews and slide the glass panel backwards.
- **Right Panel** – Unscrew the two thumbscrews and slide off.
- **Front Panel** – Find the bottom cut out, stabilise the chassis with one hand, and pull from the cutout with a little force until the clips release.

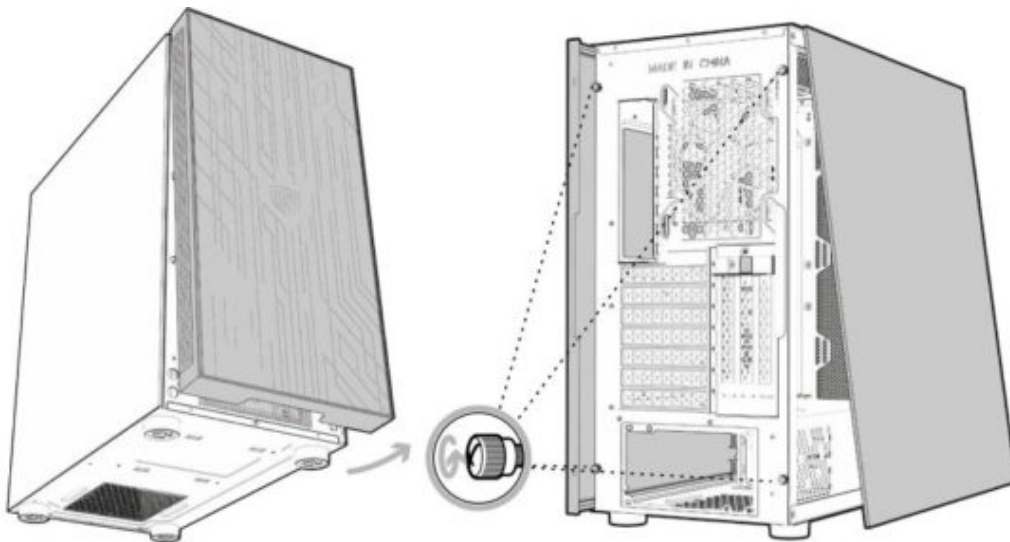

3. MOTHERBOARD INSTALLATION


- Align your motherboard with the chassis to locate where the stand-offs should be installed. Once done, remove the motherboard and fasten stand-offs accordingly.
- Insert your motherboard I/O plate into the cutout at the rear of the case.
- Place your motherboard into the chassis, making sure the rear ports fit into the I/O plate.

- Use the provided motherboard screws to attach your motherboard to the chassis.

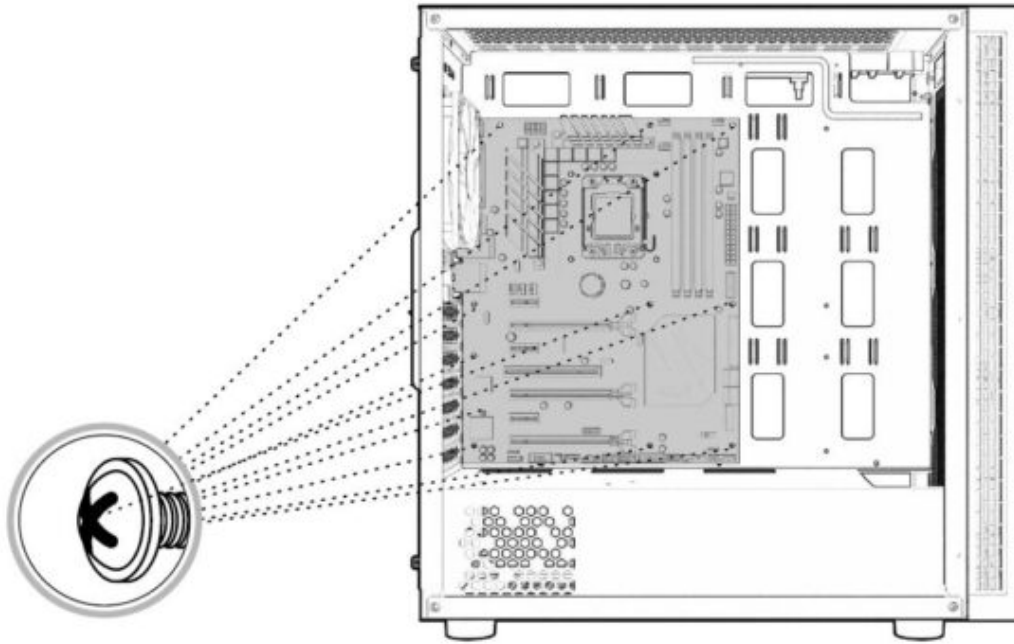

4. POWER SUPPLY INSTALLATION

- Place PSU in the bottom rear of the case, within the PSU shroud.
- Align the holes and secure with screws.

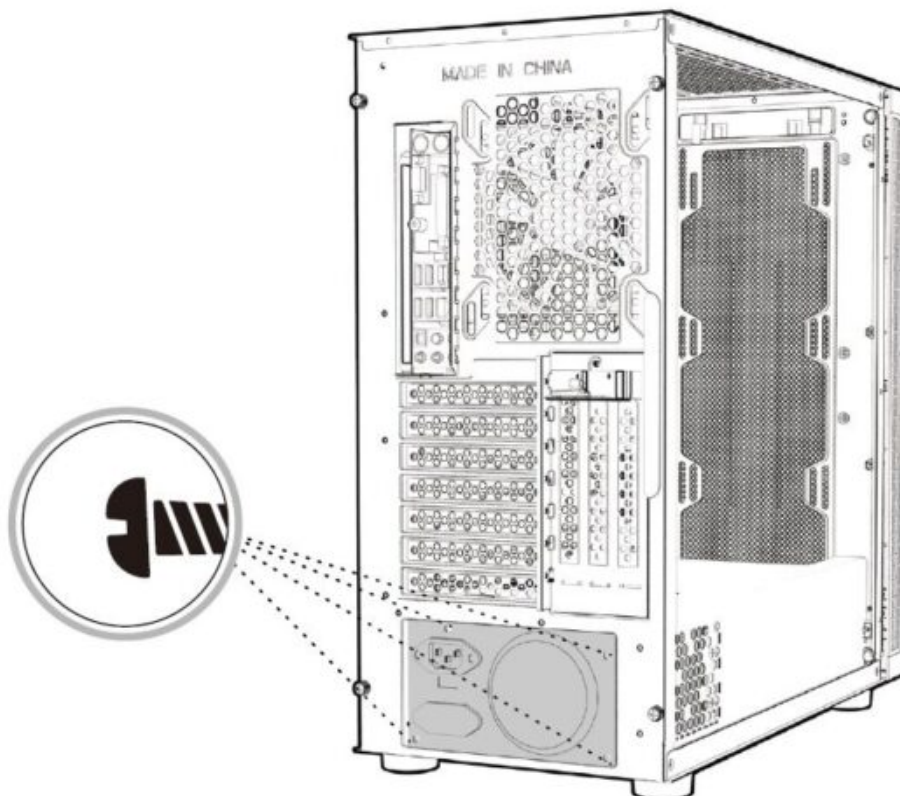


5. GRAPHICS CARD/PCI-E CARD INSTALLATION

VIDEO CARD/PCI-E CARD INSTALLATION


- Remove the rear PCI-E slot covers as necessary (depending on the slot size of your card)
- Carefully position and slide your PCI-E card into place, then secure with the add-on card screws supplied.
- If mounting vertically, attach the provided vertical GPU bracket to the PSU shroud, secure your Kolink PCI-E riser cable to it (sold separately) and attach the cable to the motherboard.

Remove the rear PCI-E slot covers as necessary, then carefully position your PCI-E card, slot into the PCI-E riser mount and secure with the add-on screws supplied.

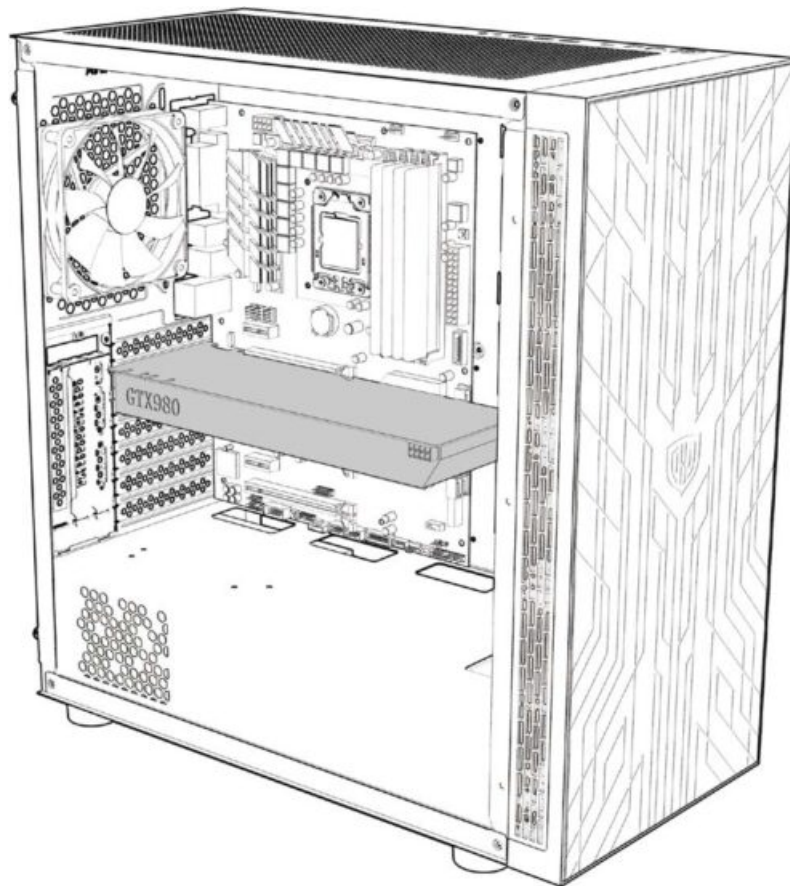


6. 2.5" SSD INSTALLATION (R)

- Remove the bracket from the rear of the motherboard plate, attach your 2.5" drive and then screw back into place.

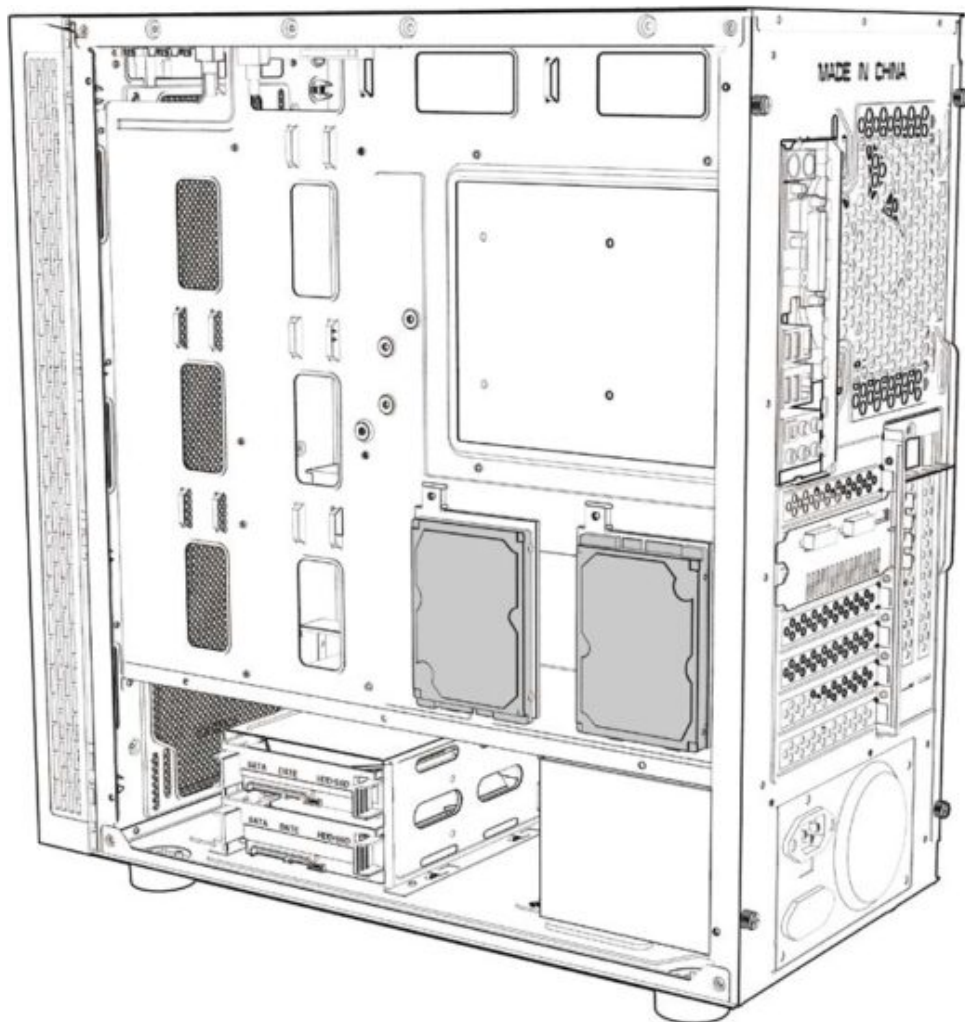


7. 2.5" SDD INSTALLATION (R)

- Place the 2.5" HDD/SSD into/on top of the HDD bracket and screw in if required.

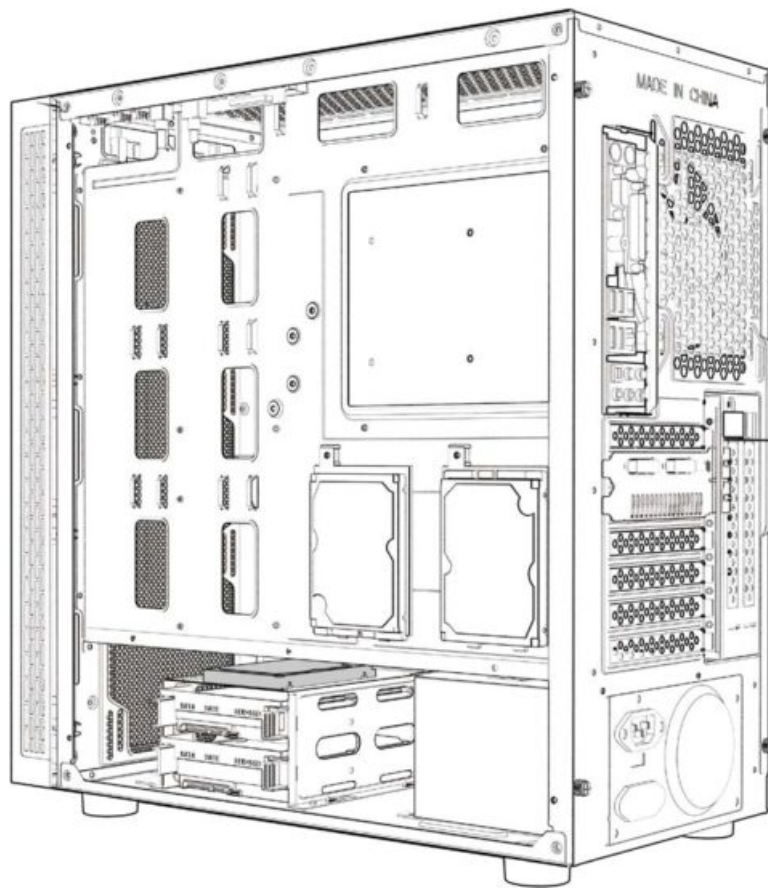


8. 3.5" HDD INSTALLATION

Place the 3.5" HDD into/on top of the HDD bracket and screw in if required.

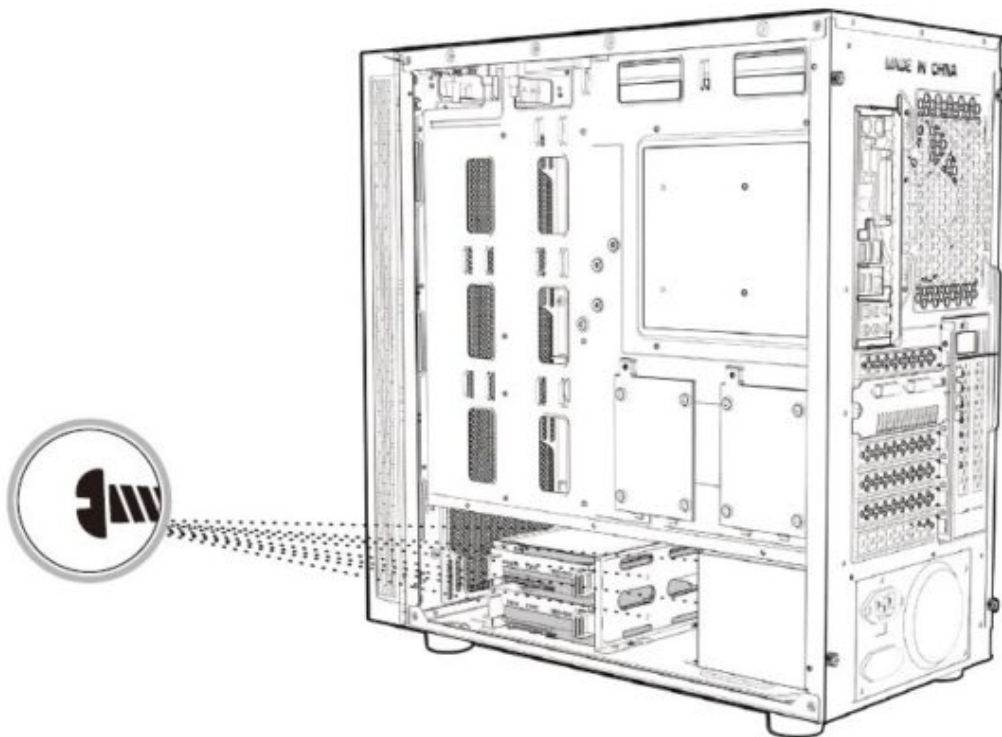


9. TOP FAN INSTALLATION

- Remove the dust filter from the top of the case.
- Align your fan(s) to the screw holes on the top of the chassis and secure with screws.
- Replace your dust filter once secured.

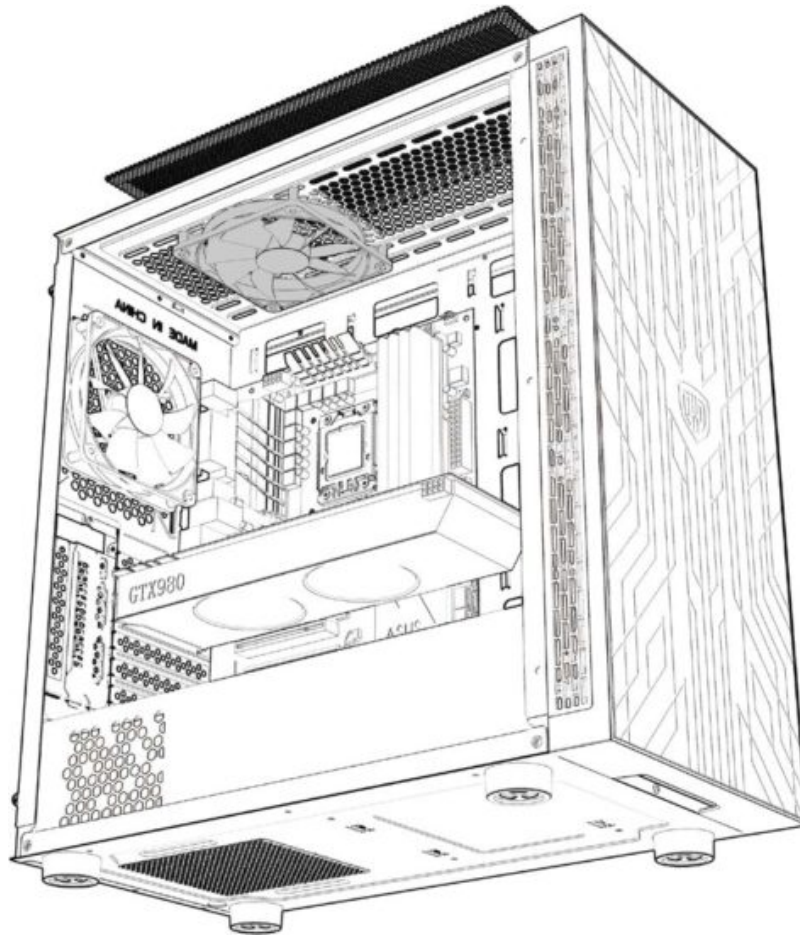


10. FRONT/REAR FAN INSTALLATION

- Align your fan to the screw holes on the chassis and secure with screws.

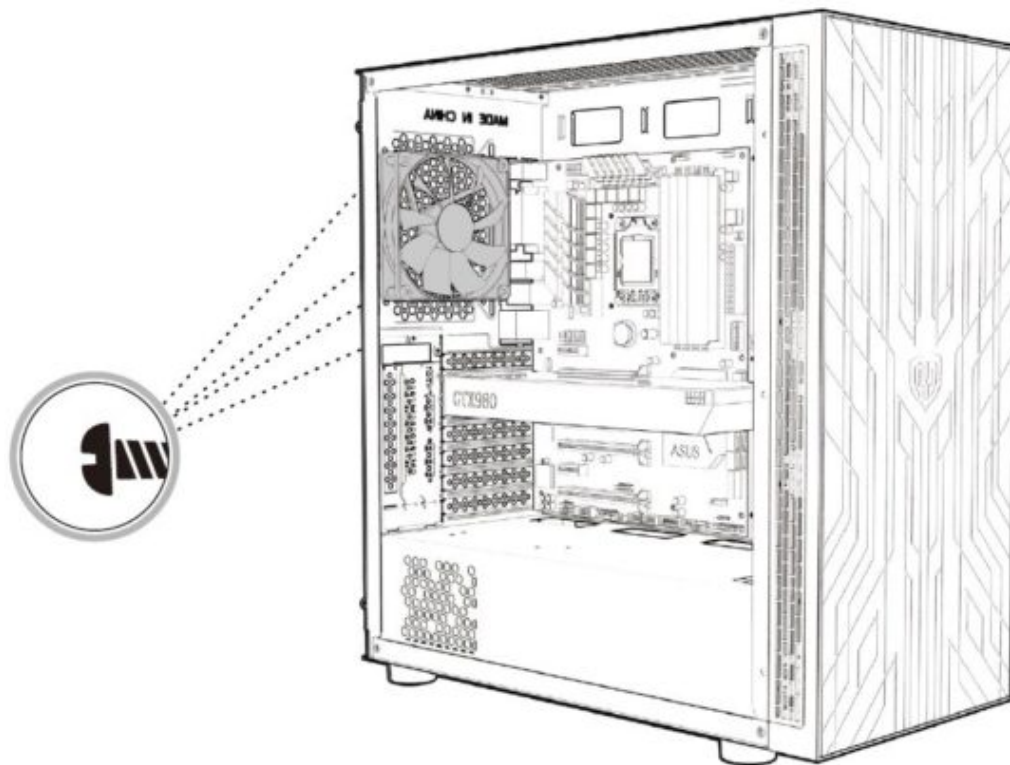

11. WATERCOOLING RADIATOR INSTALLATION

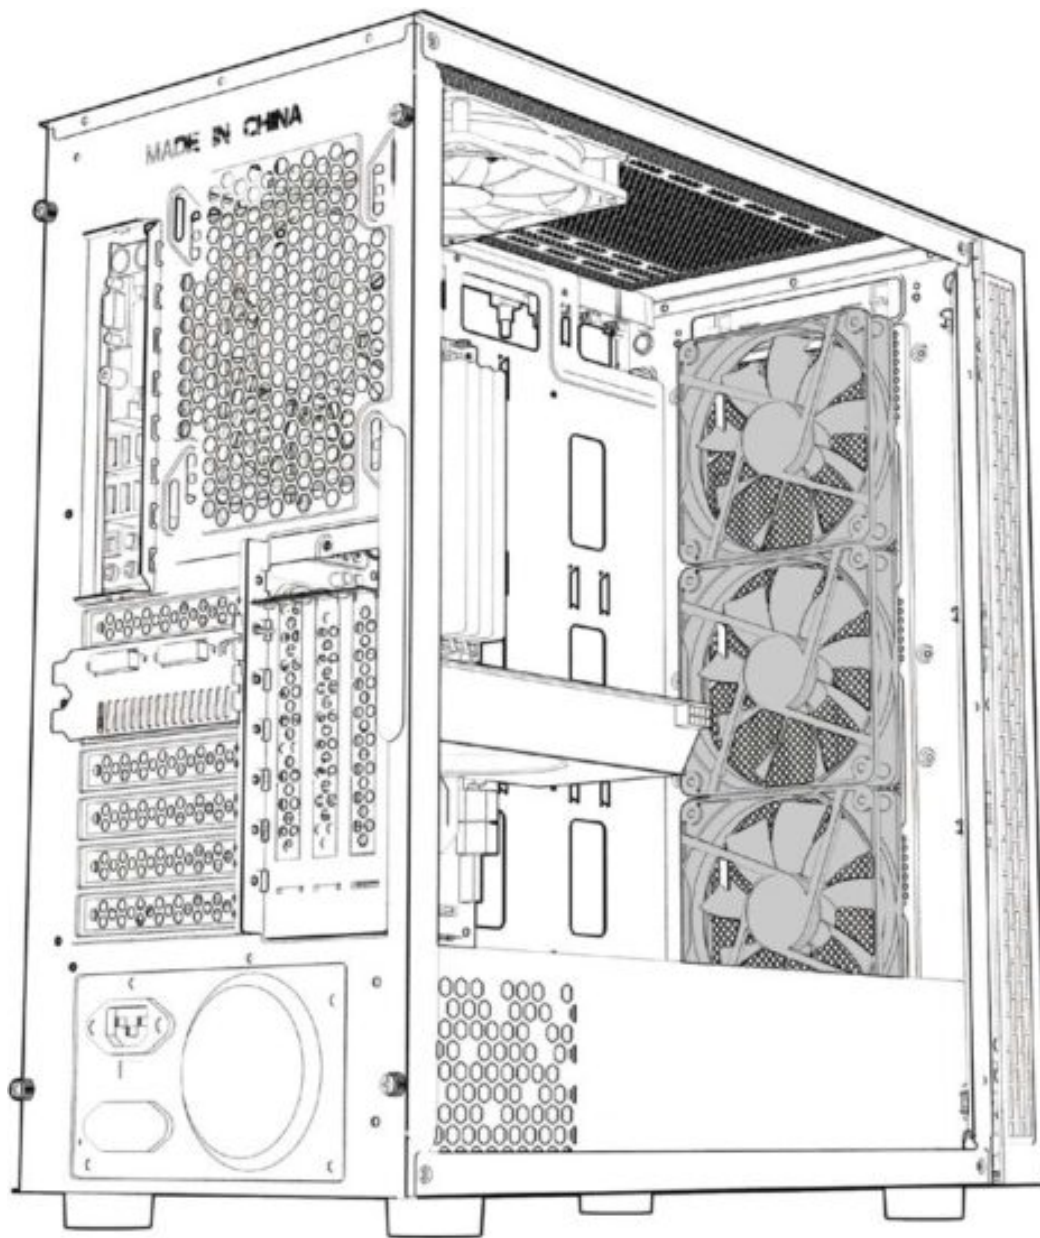

12. I/O PANEL INSTALLATION

- Carefully check the labelling of each connector from the I/O panel to identify their function.
- Cross reference with the motherboard manual to locate where each wire should be installed, then secure one at a time. Please ensure they are installed in the correct polarity to avoid non-function or damage.

Read More About This Manual & Download PDF:

Documents / Resources



[KOLINK Unity Nexus ARGB Midi Tower Case](#) [pdf] User Manual
Unity Nexus ARGB Midi Tower Case, Unity Nexus, ARGB Midi Tower Case