



Konlite JLE Series LED Emergency Exit Sign and Light Combo Owner's Manual

[Home](#) » [Konlite](#) » Konlite JLE Series LED Emergency Exit Sign and Light Combo Owner's Manual 

Konlite JLE Series LED Emergency Exit Sign and Light Combo



Contents

[1 Product Description](#)

[2 Features & Specifications:](#)

[2.1 Construction](#)

[2.2 Optics](#)

[2.3 Electrical](#)

[2.4 Installation](#)

[2.5 Listing](#)

[2.6 Warranty](#)

[3 FIXTURE DIMENSIONS](#)

[4 SPACING GUIDELINES](#)

[5 Customer Support](#)

[6 Documents / Resources](#)

[7 Related Posts](#)

Product Description

The Konlite JLE Series LED Emergency Exit Sign & Light Combo, is an ideal solution for safely illuminating the path of egress above-the-door in small spaces at lower mounting heights while providing 90 minutes of emergency power. Red and Green letters selectable.

Features & Specifications:

- Letters 6"height with 3/4"stroke. RED or GREEN letters selectable.
- Test switch and status indicator.
- 32°F to 104°F (0°C to 40°C) indoor damp location listed.
- Universal J-box mounting pattern.

Construction

Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating. Single or Double face.

Optics

1.9W LED Per head, 190 lumens two heads.

CCT: 6500K

CRI: 80

Electrical

Dual input voltage 120V/277VAC, 50/60Hz.

Built-in 3.6V1200mAh Ni-MH battery for minimum 90 minutes emergency.

Installation

Top, end and back mount, mounting pattern on canopy (top and side mount) and back plate (back mount) fits most standard size junction boxes.

Listing

UL listed, suitable for indoor damp location.

Warranty


3-year limited warranty

Ordering Information				
JLEC2	BC		W	
Series	Optics	Faceplate	Housing Color	Remote Capacity
JLEC2	BC (Bi-Color)	Blank=EXIT	W=White	Blank=Without

Other Information					
Input Voltage	Input Current	Input Watts	Lumens	Charge Time	Emergency Time
120/277V	0.031 / 0.016A	3.5W	190lm	24 Hrs	90 Mins

Packaging Information				
Length	Width	Height	Qty./Carton	Weight
17.7"(45cm)	16.1"(41cm)	9.1"(23cm)	6pcs	18.9lbs(8.6kg)


FIXTURE DIMENSIONS

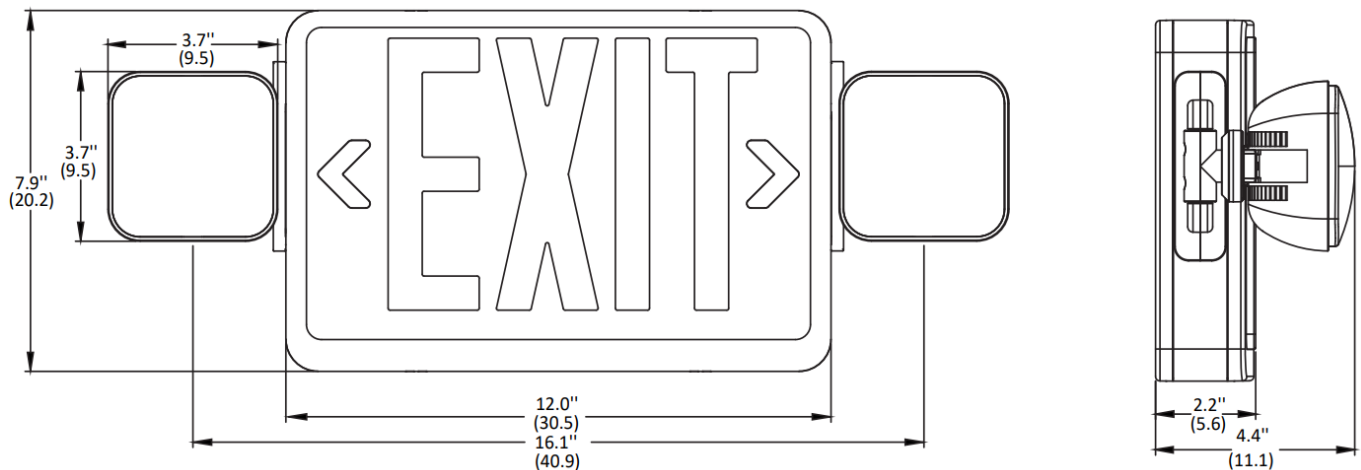


SPACING GUIDELINES

Mounting Height	Illumination Level	Single Fixtures		Multiple Fixtures	
		3" Path of Egress	6" Path of Egress	3" Path of Egress	6" Path of Egress
7.5'	1FC	10'	8'	13'	11'

Example for illuminating a 3' path of egress.

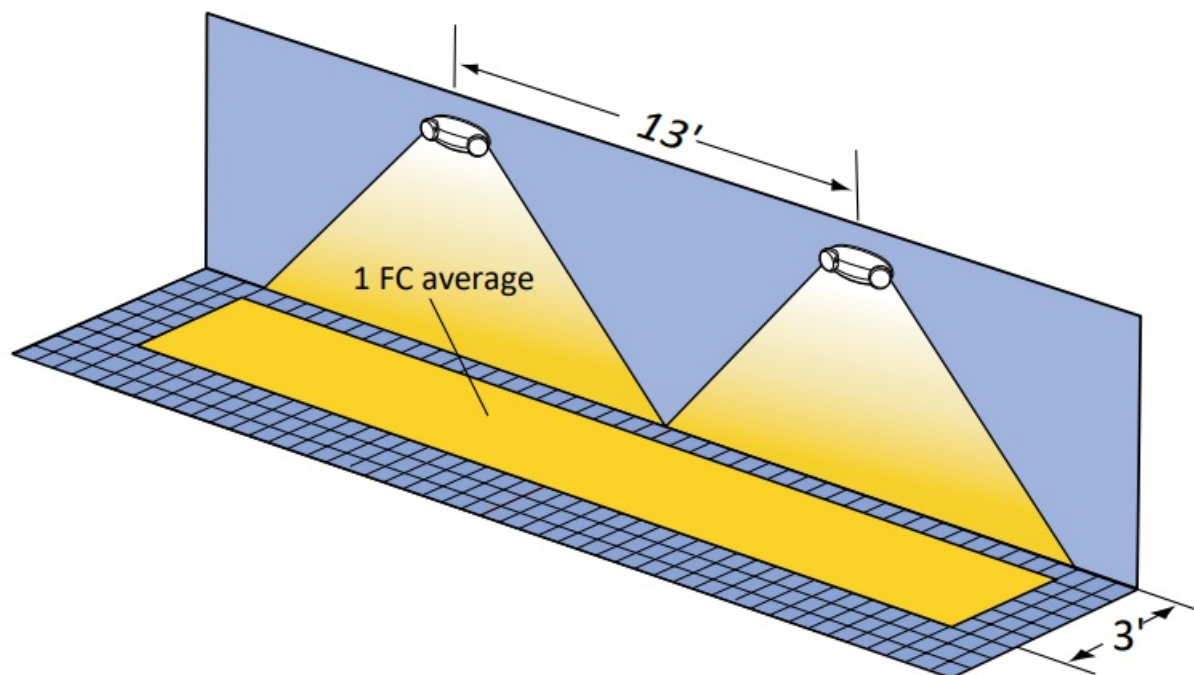

Example for illuminating a 3' path of egress.

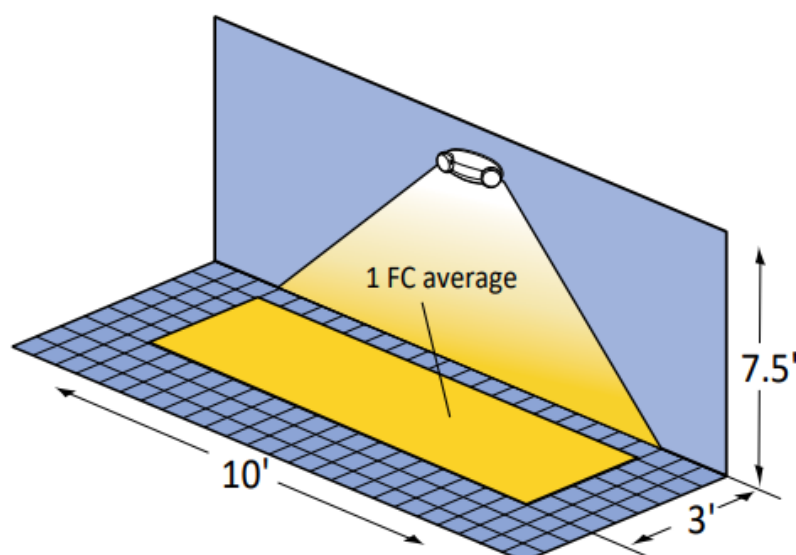

Customer Support


2880 North Berkeley Lake Road NW, Suite 8 Duluth, GA 30096

Toll Free: 877-718-0808 Fax: 770-817-0127 www.konlite.com

For informational purposes only. Content is subject to change.



Documents / Resources

	<p>Konlite JLE Series LED Emergency Exit Sign and Light Combo [pdf] Owner's Manual JLEC2, JLEC2BC, JLE Series LED Emergency Exit Sign and Light Combo, LED Emergency Exit Sign and Light Combo, Exit Sign and Light Combo, Light Combo</p>
---	--

[Manuals+](#).