



KRAMER SL-240C Compact 16-Port Master Room Controller with PoE User Manual

[Home](#) » [Kramer](#) » KRAMER SL-240C Compact 16-Port Master Room Controller with PoE User Manual 

Contents

- 1 KRAMER SL-240C Compact 16-Port Master Room Controller with PoE
- 2 Instructuions
- 3 FEATURES
- 4 TECHNICAL SPECIFICATIONS
- 5 Documents / Resources
- 6 Related Posts



KRAMER SL-240C Compact 16-Port Master Room Controller with PoE



Instructuions


SL-240C is a compact master/space controller (Kramer Control brain) with PoE. It can operate over Ethernet with control interfaces that include: four bidirectional RS-232, four IR, four GPI/O, and four relays. It controls devices such as scalers, video displays, audio amplifiers, Blu-ray players, sensors, screens, shades, door locks, and lights. Multiple Kramer Ethernet control gateways can be used to add remote I/O ports

FEATURES


- Space Controller – Controls any AV device/display with its corresponding logic
- High Performance Architecture – Enables a scalable and flexible programming platform 4 RS-232 Bidirectional Control Ports – For controlling devices via bi-directional serial control protocols
- 4 IR Emitter & 1 IR Receiver Control Ports – Control devices via IR control protocols and learn commands from IR remotes
- 4 GPI/O Control Ports – Control devices via general purpose I/O ports, program configured as digital input, digital output or analog input interface for controlling sensors, door locks, audio volume and lighting control devices
- 4 Relay Control Ports – Control devices via relay contact closure, such as opening and closing drapes, shades, blinds, and projection screen scrolling
- Resilient powering with PoE and optional PSU (not included)
- Network Support – 10/100/1000Mbps Ethernet
- LED Indicators – I/O port state and system status
- Software Management Support – Kramer Control, API

TECHNICAL SPECIFICATIONS

- BIDIRECTIONAL PORTS: S-232 serial on 3-pin terminal blocks, 4 GPI/O on 2-pin terminal blocks, 1 Ethernet on a RJ-45 connector, 1 mini-USB connector for firmware upgrade
- INPUTS: 1 built-in IR sensor (for learning)
- OUTPUTS: 4 IR out and 4 relays on 2-pin terminal block connectors
- INDICATORS: LED indicator for each port and function
- PROCESSOR SPEED: 1GHz
- MEMORY: 512MB RAM, 4GB Flash
- POWER CONSUMPTION: 5V DC, 2A
- POWER SOURCE: PoE (for extra power resiliency, connect to the optional 5V DC power supply)
- Product Dimensions: 19.00cm x 11.50cm x 2.70cm (7.48" x 4.53" x 1.06") W, D, H
- Product Weight: 0.4kg (1.0lbs) approx
- Shipping Dimensions: 34.50cm x 16.50cm x 5.20cm (13.58" x 6.50" x 2.05") W, D, H
- Shipping Weight: 1.0kg (2.2lbs) approx

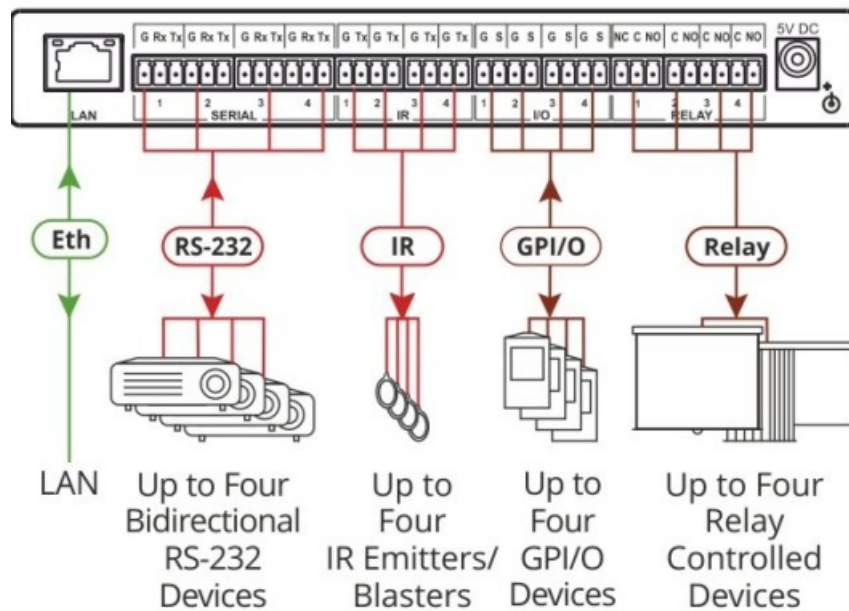

Documents / Resources

	<p>KRAMER SL-240C Compact 16-Port Master Room Controller with PoE [pdf] User Manual SL-240C Compact 16 Port Master Room Controller with PoE, SL-240C, Compact 16 Port Master Room Controller with PoE, Compact 16 Port Master Room Controller, Master Room Controller, Room Controller, Controller</p>
--	---