



KRAMER VS-42H2 4x2 4K HDR HDMI HDCP 2.2 Matrix Switcher Instructions

[Home](#) » [Kramer](#) » KRAMER VS-42H2 4x2 4K HDR HDMI HDCP 2.2 Matrix Switcher Instructions 

KRAMER VS-42H2 4x2 4K HDR HDMI HDCP 2.2
Matrix Switcher Instructions



VS-42H2
4x2 4K HDR HDMI HDCP 2.2 Matrix Switcher

| Ethernet - RJ-45 | 4K/60 UHD (4:4:4)



VS-42H2 is a high-performance 4x2 matrix switcher for 4K HDR HDMI signals. It reclocks and equalizes the signals and can route any one of four HDMI, HDCP-compliant sources (selectable) to any or all outputs simultaneously

FEATURES

High-Performance AV Matrix – Switches 4 4K@60Hz (4:4:4) HDR HDMI HDCP-compliant signals to 2 18G 4K@60Hz (4:4:4) HDR HDMI HDCP-compliant outputs at up to 18G data rate. Signals are HDCP 2.2/1.4 compliant

Kramer Equalization & reKlocking™ Technology – Rebuilds the digital signal to travel longer distances

EDID Management – Individual EDID management per input. Captures and stores the EDID from a display device

Flexible Content Protection – Selectable HDCP per input

Quick Access to Common Configurations – Save up to six preset configurations

Convenient Unit Control and Configuration – Local control via front panel switching, mute, lock and EDID buttons, and IR remote control. Distance control via user-friendly embedded web pages via the Ethernet, Protocol 3000 API, and RS-232 serial commands transmitted by a PC, touch screen system or other serial controller


Cost-Effective Maintenance – Power status, IR and Input Selection indicators facilitate easy local maintenance and troubleshooting. Local firmware upgrade via USB or RS-232 connection ensures lasting, field-proven deployment

Easy Installation – Half-19" size enables mounting in a 1U rack space with the recommended rack adapter

TECHNICAL SPECIFICATIONS

Inputs	4 HDMI: On female HDMI connectors
Outputs	2 HDMI: On female HDMI connectors
Ports	1 Ethernet: On an RJ-45 female connector 1 RS-232: On a 3-pin terminal blocks 1 USB: On a mini USB connector 8 Remote Selection Contact-Closure Switches: On 9 terminal block pins
Video	Max. Resolution: 4K@60Hz 4:4:4 Max. Data Rate: 18Gbps (6Gbps per graphic channel) Compliance: HDCP 2.2/1.4
User Interface	Control: Input selector, output mute, EDID capture, and panel lock buttons. DIP switch HDCP configuration Indicators: Switching, IR, and power LEDs
Power	Source: 5V DC Consumption: 2.5A
Environmental Conditions	Operating Temperature: 0° to +40°C (32° to 104°F) Storage Temperature: -40° to +70°C (-40° to 158°F) Humidity: 10% to 90%, RH non-condensing
STANDARDS COMPLIANCE	Safety: CE Environmental: RoHs, WEEE
Enclosure	Size: Half-19" 1U Type: Aluminum Cooling: Convection ventilation
Accessories	Included: Power adapter, rubber feet, IR remote control transmitter (upon request)
Product Dimensions	21.46cm x 16.30cm x 4.36cm (8.45" x 6.42" x 1.72") W, D, H
Product Weight	1.0kg (2.1lbs) approx
Shipping Dimensions	35.10cm x 21.20cm x 7.20cm (13.82" x 8.35" x 2.83") W, D, H
Shipping Weight	1.6kg (3.5lbs) approx



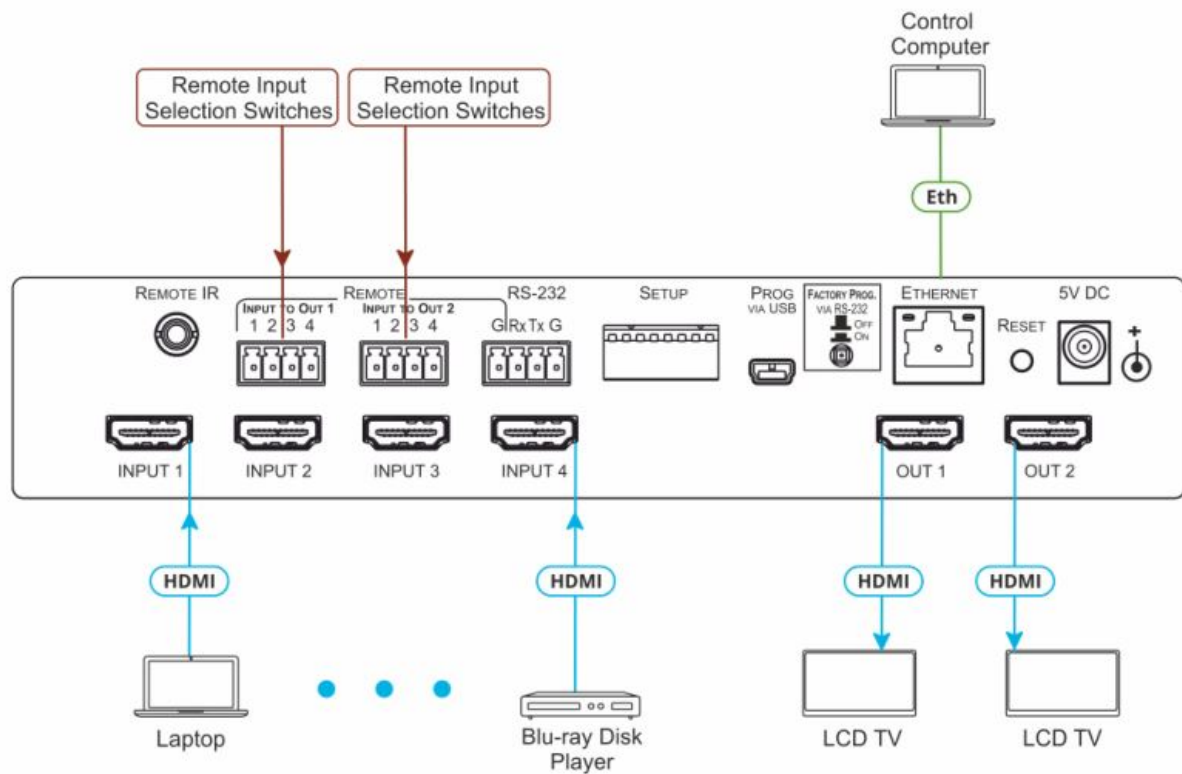

Contents

- 1 Documents / Resources
- 2 Related Posts

Documents / Resources

	KRAMER VS-42H2 4x2 4K HDR HDMI HDCP 2.2 Matrix Switcher [pdf] Instructions VS-42H2 4x2 4K HDR HDMI HDCP 2.2 Matrix Switcher, VS-42H2, 4x2 4K HDR HDMI HDCP 2.2 Matrix Switcher, HDR HDMI HDCP 2.2 Matrix Switcher, HDCP 2.2 Matrix Switcher, Matrix Switcher, Switcher
---	--