



[Manuals.plus](#) /

› [ALTOUMAN](#) /

› ALTOUMAN Wireless Dog Fence System User Manual

ALTOUMAN B0FMYCGPFB

ALTOUMAN Wireless Dog Fence System User Manual

Model: B0FMYCGPFB

1. INTRODUCTION

This manual provides detailed instructions for the ALTOUMAN Wireless Dog Fence System. This system combines a wireless fence with pet training functions, designed to help manage your dog's boundaries and behavior effectively. Please read this manual thoroughly before use to ensure proper setup and operation.



Image 1.1: Overview of the ALTOUMAN Wireless Dog Fence System, showing the remote control and two collars with dogs.

2. PRODUCT COMPONENTS

The ALTOUMAN Wireless Dog Fence System typically includes the following items:

- 1 x Remote Transmitter
- 2 x Receiver Collars (for 2-dog system)
- 2 x Adjustable Nylon Straps
- 4 x Short Contact Points
- 4 x Long Contact Points
- 4 x Silicone Covers for Contact Points
- 1 x USB Charging Cable (Type-C)
- 1 x User Manual

3. GETTING STARTED (SETUP)

3.1 Charging the Devices

Before initial use, fully charge both the remote transmitter and the receiver collars. A full charge typically takes approximately 2 hours.

- Connect the USB charging cable to the charging port on the remote and collars.
- Plug the other end into a compatible USB power adapter (not included), power bank, or computer USB port.
- The indicator light will show charging status and turn solid when fully charged.



Image 3.1: Charging the remote and collar, highlighting fast charging and long standby times.

3.2 Attaching Contact Points and Collar Fitting

Select the appropriate contact points (short for thin-haired dogs, long for thick-haired dogs) and attach them to the receiver collar. Place the silicone covers over the contact points for added comfort and protection.

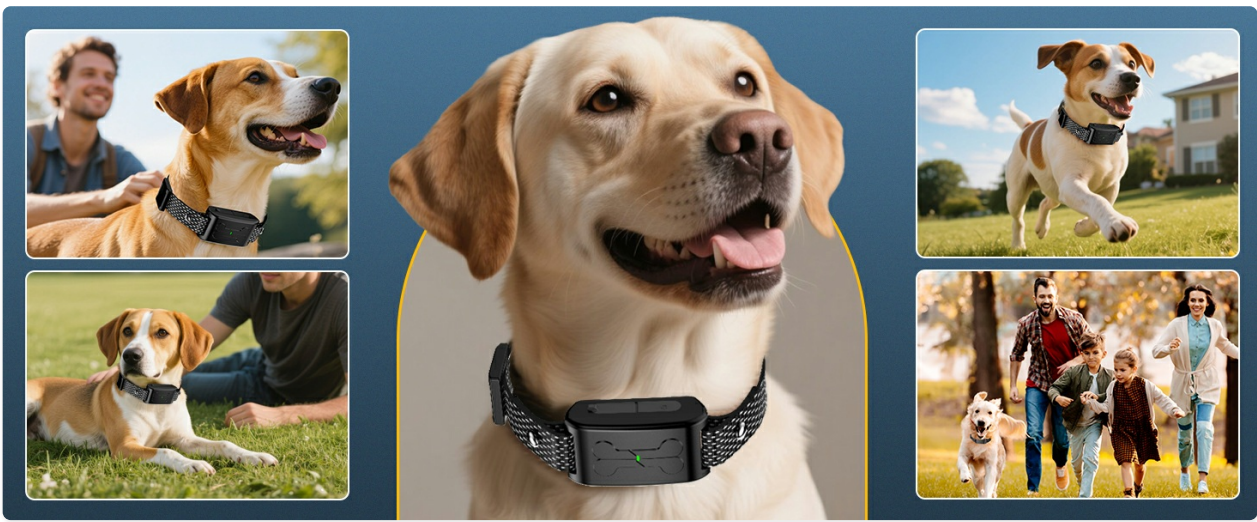


Image 3.2: Illustration of removable metal prongs and silicone covers for the collar.

Fit the collar snugly around your dog's neck. Ensure the contact points touch the dog's skin. The collar is adjustable up to 23.6 inches and suitable for dogs weighing 8-110 lbs.



Image 3.3: Collar adjustability and suitability for different dog sizes.

4. OPERATING THE WIRELESS FENCE

4.1 Setting the Boundary

The system allows you to set a circular boundary ranging from 30 to 1300 feet (approximately 9 to 396 meters) from the remote transmitter. The remote features 10 adjustable distance levels.

- Turn on the remote transmitter and the receiver collar(s).
- Use the designated buttons on the remote to adjust the boundary distance.
- Walk the perimeter to confirm the desired boundary.



Image 4.1: Visual representation of the wireless fence boundary and adjustable range.

4.2 Boundary Warning System

When a dog approaches the set boundary, the collar will automatically trigger warnings:

- **Warning Zone:** As the dog approaches the boundary, the collar will emit a beep.
- **Correction Zone:** If the dog continues past the warning zone, the collar will activate vibration or static correction (depending on the selected training mode).



Image 4.2: Personalized safety solutions showing how different warnings are triggered near the boundary.

5. TRAINING MODES

The system offers three distinct training modes to address various behavioral needs:

- **Beep Mode:** Emits an audible tone to alert the dog.
- **Vibration Mode (0-9 Levels):** Provides a tactile vibration stimulus. The intensity can be adjusted.
- **Static Correction Mode (0-9 Levels):** Delivers a mild static pulse. The intensity can be adjusted.

It is recommended to begin with the lowest intensity level and gradually increase as needed, observing your dog's response. The remote features an advanced smart chip for instantaneous response.

3 effective Training Modes

Correct Bad Behaviors in Time



Image 5.1: Overview of the three effective training modes.

6. BATTERY MANAGEMENT

The ALTOUMAN Wireless Dog Fence System is equipped with high-capacity lithium batteries for extended use.

- **Remote Standby Time:** Up to 185 days.
- **Collar Standby Time:** Up to 180 days.
- **Charging Time:** Approximately 2 hours for both devices.

Regular charging ensures consistent performance. Use the provided Type-C charging cable.



Image 6.1: Information on long-lasting battery life and quick charging.

7. WATERPROOF FEATURES

The receiver collar is designed with an IPX7 waterproof rating, making it resistant to rain, splashes, and temporary submersion. This allows your dog to play outdoors in various weather conditions without affecting the collar's functionality.

Note: The remote transmitter is not waterproof and should be protected from moisture.

Security Lock & LED light

Less Accidental Shock



Image 7.1: A dog demonstrating the IPX7 waterproof capability of the collar.

Long Lasting Battery Life



2 Hour
Quick Charge



185
Days



180
Days



Image 7.2: Another depiction of the IPX7 waterproof collar in use.

8. SAFETY FEATURES

The system incorporates features designed for safety and convenience:

- **Keypad Lock:** Prevents accidental button presses on the remote, ensuring consistent training and preventing unintended corrections.
- **Dual-Function Flashlight:** The remote includes a flashlight with two modes: a constant white beam for general visibility and a flashing strobe mode for increased visibility and locating your dog in low-light conditions.

Adjustable Fit & Easy to Clean



23.6inches

Extra part can be cut off



10-130lbs

Image 8.1: Remote control showing security lock and LED flashlight features.

Removable Metal Prongs & Silicone Covers

Double protection won't harm the dog's skin



Short: for thin hair dogs Long: for thick hair dogs



Image 8.2: Demonstrating the two safety anti-lost light modes of the remote.

9. MAINTENANCE

Proper maintenance ensures the longevity and effectiveness of your ALTOUMAN Wireless Dog Fence System:

- **Cleaning:** Regularly clean the receiver collar and contact points with a damp cloth. Ensure no dirt or debris accumulates around the contact points, which could affect conductivity.
- **Collar Fit:** Periodically check the collar fit to ensure it is snug but comfortable, and that the contact points maintain proper skin contact.
- **Battery Care:** Avoid fully depleting the batteries frequently. Charge them regularly, especially if the system will not be used for an extended period.
- **Storage:** Store the system in a cool, dry place when not in use.

10. TROUBLESHOOTING

If you encounter issues with your ALTOUMAN Wireless Dog Fence System, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Collar not responding to boundary	Low battery; Collar not paired; Boundary range too small; Obstructions	Charge collar; Re-pair collar with remote; Increase boundary range; Move remote to a central, unobstructed location.
No correction/vibration	Contact points not touching skin; Intensity level too low; Faulty contact points	Adjust collar fit; Increase intensity level; Check contact points for damage and replace if necessary.
Remote not functioning	Low battery; Keypad lock engaged	Charge remote; Disengage keypad lock.
Inconsistent boundary	Interference from metal objects or electronics; Remote placement	Relocate remote away from large metal objects or strong electromagnetic fields; Ensure remote is placed centrally and elevated.

If problems persist, please contact ALTOUMAN customer support.

11. PRODUCT SPECIFICATIONS

Feature	Detail
Model Number	B0FMYCGPFB
Brand	ALTOUMAN
Item Weight	14.1 ounces (approx. 400g)
Manufacturer	Shenzhen Jingtong Technology Co.,Ltd
Batteries	3 Lithium Ion batteries required (included)
Collar Material	Plastic
Collar Closure Type	Buckle
Collar Adjustable Size	Up to 23.6 inches
Recommended Dog Weight	8-110 lbs
Waterproof Rating (Collar)	IPX7
Wireless Fence Range	30-1300 feet (approx. 9-396 meters)
Training Modes	Beep, Vibration (0-9 levels), Static Correction (0-9 levels)

12. WARRANTY AND SUPPORT

ALTOUMAN is committed to providing quality products and customer satisfaction. Your Wireless Dog Fence System comes with a warranty promise.

- **Customer Support:** 24-hour online customer support is available.
- **After-Sale Service:** Enjoy 365 days of after-sale service.

For warranty claims, technical assistance, or any questions regarding your product, please visit the official ALTOUMAN store on Amazon or contact their customer service directly.

ALTOUMAN Store: [Visit ALTOUMAN Store](#)