ZZA Z34F

ZZA 34-inch Curved Gaming Monitor (Model Z34F) User Manual

Model: Z34F

1. Introduction

Thank you for choosing the ZZA 34-inch Curved Gaming Monitor. This manual provides essential information for setting up, operating, and maintaining your monitor. Please read it thoroughly before use to ensure optimal performance and safety.

This monitor features a 34-inch UltraWide WQHD (3440x1440) display with a 240Hz refresh rate and 1ms response time, designed for an immersive gaming and viewing experience. Its 1500R curvature enhances visual comfort, while Adaptive-Sync technology minimizes screen tearing and stuttering. The monitor also includes HDR support, Eye Care features, and VESA mount compatibility.

2. Safety Information

Please observe the following safety precautions to prevent damage to the monitor and ensure your safety:

- Do not expose the monitor to rain, moisture, or extreme temperatures.
- Ensure the power cord is securely connected and not damaged.
- Avoid placing heavy objects on the power cord or the monitor itself.
- Do not attempt to disassemble or repair the monitor yourself. Refer all servicing to qualified personnel.
- Keep the monitor away from direct sunlight and heat sources.
- Use only the power adapter provided with the monitor.
- Ensure proper ventilation around the monitor to prevent overheating.

3. Package Contents

Verify that all items are present in the package:

- ZZA 34-inch Curved Gaming Monitor

- Monitor Stand (Base and Neck)
- Power Adapter and Power Cable
- DisplayPort (DP) Cable
- HDMI Cable
- User Manual (this document)
- Mounting Screws for Stand



Image: Front view of the ZZA 34-inch Curved Gaming Monitor.

4. Setup

4.1. Assembling the Stand

1. Carefully remove the monitor and stand components from the packaging. Place the monitor face down on a soft, clean surface to prevent scratches.

2. Attach the stand neck to the monitor's rear panel. Align the tabs and push firmly until it clicks into place.
3. Attach the stand base to the bottom of the stand neck. Secure it with the provided screw.
4. Once assembled, carefully lift the monitor and place it on a stable, flat surface.



Image: Back view of the ZZA 34-inch Curved Gaming Monitor, showing the stand attachment area.

4.2. VESA Wall Mounting (Optional)

The monitor supports VESA wall mounting (75mm x 75mm). If you choose to wall mount, remove the stand assembly first. A separate VESA bracket is required and not included in the package.



Image: Illustration showing the ZZA 34-inch Curved Gaming Monitor's VESA mount compatibility.

4.3. Connecting Cables

Connect the necessary cables to the monitor and your computer or other devices:

- **Power Connection:** Connect the power adapter to the monitor's DC input port, then plug the power cable into a power outlet.
- **Video Connection:** Use either a DisplayPort (DP) cable or an HDMI cable to connect your computer's graphics card to the corresponding input port on the monitor. For optimal performance (240Hz refresh rate), a DisplayPort connection is recommended.
- **Audio Output:** If desired, connect headphones or external speakers to the 3.5mm audio output (EARPHONE) port.



Image: Diagram illustrating the various input ports on the ZZA 34-inch Curved Gaming Monitor.

5. Operating the Monitor

5.1. Power On/Off

Press the power button, usually located on the back or bottom of the monitor, to turn it on or off. The power indicator light will illuminate when the monitor is on.

5.2. On-Screen Display (OSD) Menu

The OSD menu allows you to adjust various monitor settings. Use the joystick or buttons (location may vary) on the monitor to navigate the menu.

- **Navigation:** Push the joystick/buttons up, down, left, or right to move through menu options.
- **Selection:** Press the joystick/button inward to select an option or confirm a setting.
- **Exit:** Move the joystick/button to the left or press a dedicated 'Exit' button to go back or close the OSD menu.

5.3. Adjusting Display Settings

Key settings you can adjust via the OSD menu include:

- **Brightness/Contrast:** Adjust the overall luminance and difference between light and dark areas.
- **Color Settings:** Modify color temperature, gamma, and individual RGB values.
- **Input Source:** Manually select between DisplayPort and HDMI inputs.
- **Refresh Rate:** Ensure your operating system and graphics card settings are configured to utilize the monitor's 240Hz refresh rate for the smoothest experience.
- **Adaptive-Sync:** Enable this feature in the OSD menu and your graphics card control panel to synchronize the monitor's refresh rate with your GPU's frame rate, reducing screen tearing and stuttering.
- **HDR (High Dynamic Range):** Activate HDR for enhanced contrast and color depth in compatible content.
- **Eye Care:** Utilize features like low blue light mode to reduce eye strain during prolonged use.
- **Game Assist:** Access gaming-specific features such as crosshairs or timers.



Image: Side view of the ZZA 34-inch Curved Gaming Monitor, emphasizing its 1500R curvature for immersive viewing.

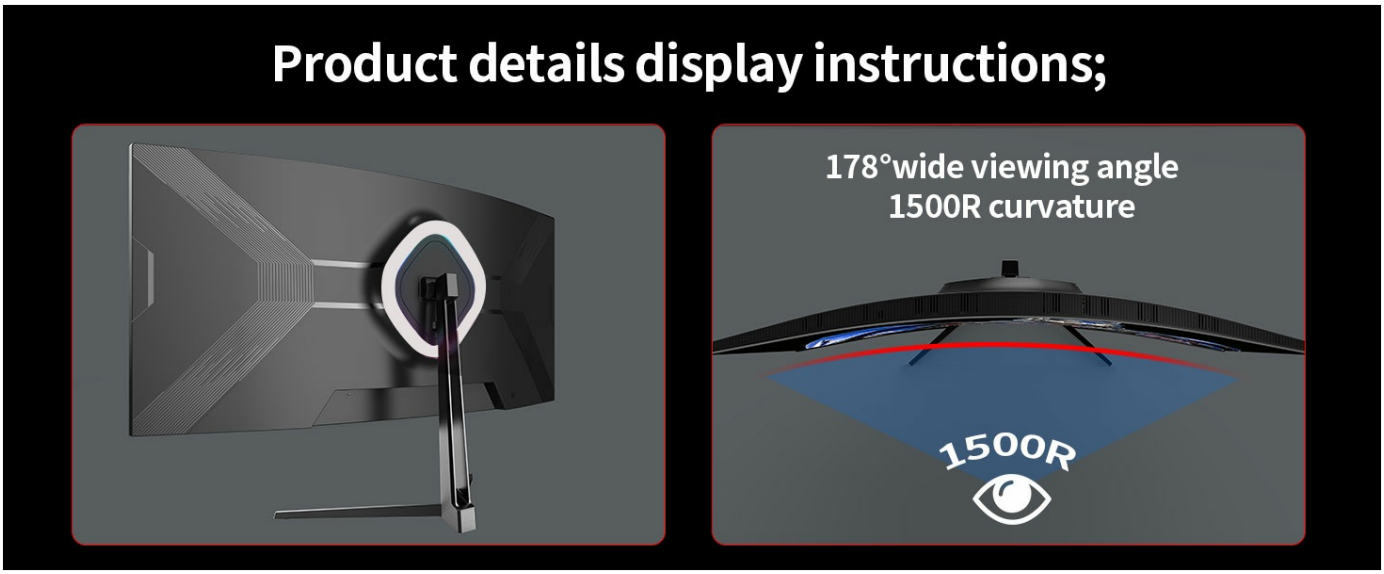


Image: Back of the ZZA 34-inch Curved Gaming Monitor, showcasing its integrated RGB lighting.

6. Maintenance

6.1. Cleaning the Monitor

To clean the monitor, first ensure it is powered off and unplugged. Use a soft, lint-free cloth lightly dampened with water or a non-abrasive screen cleaner. Do not spray liquid directly onto the screen or monitor casing. Avoid using alcohol, ammonia, or abrasive cleaners.

6.2. General Care

- Avoid touching the screen directly with your fingers or sharp objects.
- Do not block the ventilation openings on the monitor.
- When moving the monitor, hold it by the base or edges, not by the screen.

7. Troubleshooting

If you encounter issues with your monitor, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No Power	Power cable not connected; Power outlet faulty; Monitor off.	Check power cable connections; Try a different outlet; Press the power button.
No Signal	Video cable not connected; Incorrect input source selected; Computer not powered on.	Ensure video cable is securely connected; Select the correct input source via OSD; Power on your computer.
Flickering Screen	Loose video cable; Incorrect refresh rate; Adaptive-Sync issue.	Reconnect video cable; Adjust refresh rate in OS settings; Toggle Adaptive-Sync on/off.
Poor Image Quality	Incorrect resolution; Display settings not optimized.	Set resolution to 3440x1440; Adjust brightness, contrast, and color settings in OSD.

8. Specifications

Key technical specifications for the ZZA 34-inch Curved Gaming Monitor (Model Z34F):

Feature	Specification
Brand	ZZA
Model Number	Z34F
Screen Size	34 Inches
Resolution	3440 x 1440 (WQHD)
Aspect Ratio	21:9
Curvature	1500R
Refresh Rate	240 Hz
Response Time	1 Millisecond (GtG)
Display Technology	VA

Feature	Specification
Brightness	250 cd/m²
Contrast Ratio	4000:1
Color Gamut	99% sRGB
Connectivity	2x HDMI 1.4, 2x DisplayPort 1.2, 1x Earphone Out
VESA Mount	75mm x 75mm
Weight	6.7 Kilograms
Special Features	Adaptive-Sync, HDR Display, Eye Care, Bezel-Free Design

9. Warranty and Support

The ZZA 34-inch Curved Gaming Monitor comes with a standard manufacturer's warranty. For specific warranty terms and conditions, please refer to the warranty card included in your product packaging or visit the official ZZA website. For technical support, troubleshooting assistance, or service inquiries, please contact ZZA customer support through their official channels.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question