

ZAPPTRONIX mk08

ZAPPTRONIX Electronic Rat and Mouse Zapper User Manual

Model: mk08

1. PRODUCT OVERVIEW

The ZAPPTRONIX Electronic Rat and Mouse Zapper (Model mk08) is designed for efficient and humane indoor rodent control. This device delivers a high-voltage shock to eliminate rats and mice quickly and effectively. It is suitable for use in homes, garages, offices, and other indoor environments.



Image 1.1: The ZAPPTRONIX Electronic Rat and Mouse Zapper, a black rectangular device with an entry tunnel and an ON/OFF switch on the side.

2. SAFETY INFORMATION

Please read and understand all safety instructions before operating the device. Failure to follow these instructions may result in electric shock, fire, or other hazards.

- **High Voltage Hazard:** The device operates with high voltage. Exercise extreme caution.
- **Keep Away from Children and Pets:** Store and operate the zapper in locations inaccessible to children and household pets.
- **Turn Off Power Before Touching:** Always switch the device to the 'OFF' position and remove any power source before handling, cleaning, or performing any maintenance.
- **Indoor Use Only:** This device is designed exclusively for indoor use. Do not expose it to rain or

moisture.

- **Do Not Touch Steel Surface:** Avoid direct contact with the internal steel plates when the device is powered on.
- **Keep Away from Water:** Do not place the zapper near water sources or in damp environments.



Image 2.1: Visual representation of safety warnings including high voltage, not touching steel surfaces, indoor use only, keeping away from water, pests, and children.

3. PACKAGE CONTENTS

Verify that all items are present in the package:

- 1 x ZAPPTRONIX Electronic Rat and Mouse Zapper (Model mk08)
- 1 x Charging Cable
- 1 x Rechargeable Lithium Ion Battery (pre-installed)

4. PRODUCT FEATURES

The ZAPPTRONIX mk08 is equipped with several features for effective and convenient rodent control:

- **High-Voltage Shock Mechanism:** Ensures quick and humane elimination of rodents.
- **Rechargeable Battery:** Provides cordless operation and portability.
- **LED Indicator:** Signals device status, including successful catches.
- **ON/OFF Switch:** For safe activation and deactivation of the device.
- **Charging Port:** For recharging the internal battery.
- **Entry Door:** Designed for easy rodent access into the zapping chamber.

FEATURES

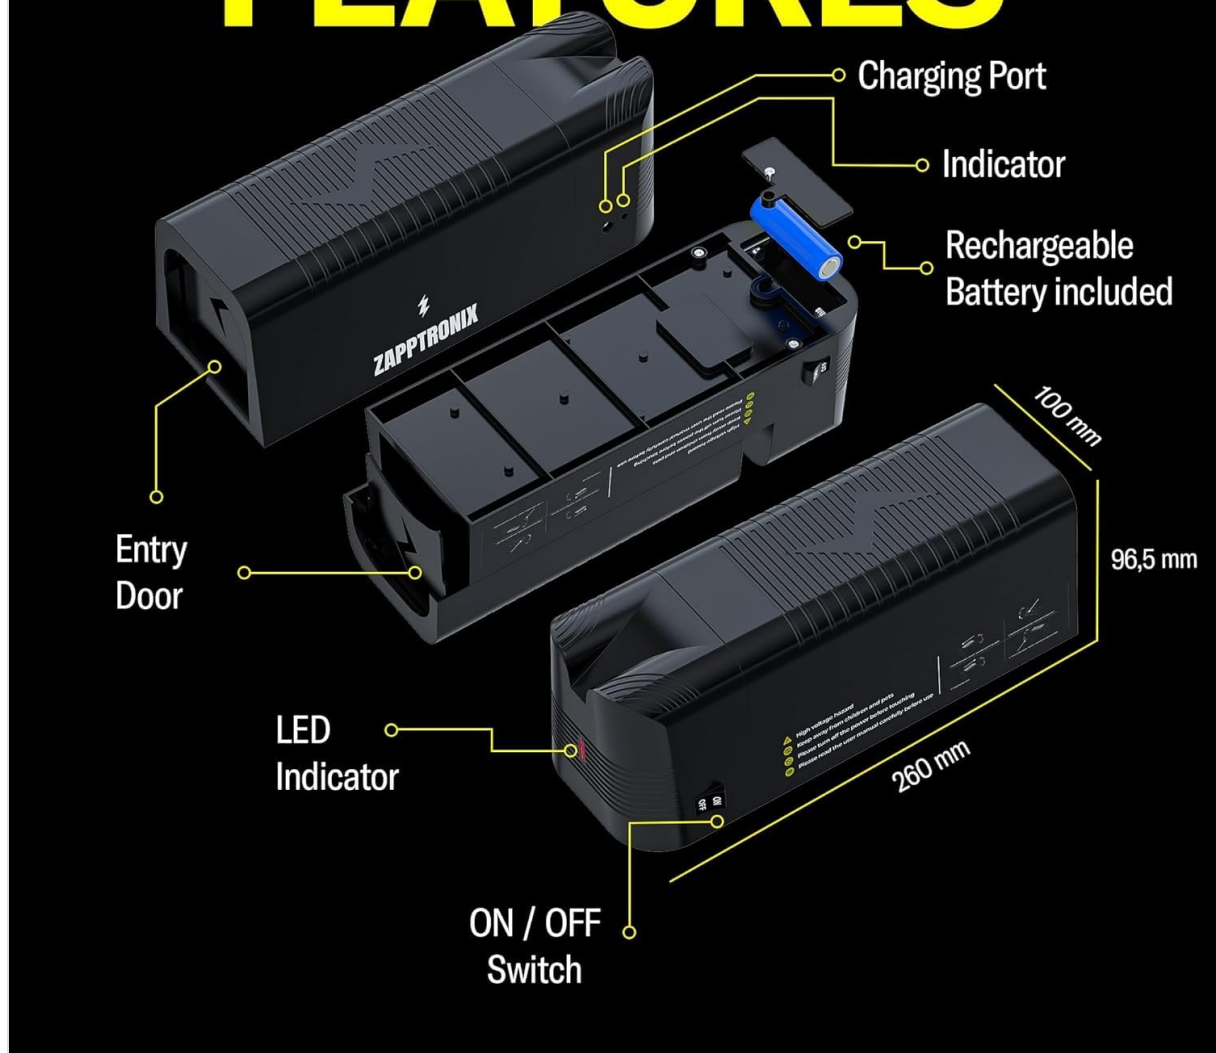


Image 4.1: Exploded view diagram of the ZAPPTRONIX Zapper highlighting its components: Charging Port, Indicator, Rechargeable Battery, Entry Door, LED Indicator, and ON/OFF Switch. Dimensions are also shown: 260mm length, 100mm width, 96.5mm height.


5. SETUP

Follow these steps to set up your ZAPPTRONIX Electronic Rat and Mouse Zapper:

1. **Charge the Device:** Before first use, ensure the internal battery is fully charged using the provided charging cable. The LED indicator will show charging status. A full charge typically provides power for approximately 30 shocks.
2. **Open the Sliding Cover:** With the device turned OFF, slide the top cover forward to access the bait compartment.
3. **Place the Bait:** Apply a small amount of bait (e.g., peanut butter, cheese, nuts, sugar, cookie, or meat) at the very back of the trap, ensuring it is away from the metal plates.
4. **Close the Cover:** Slide the top cover back into place securely.
5. **Choose a Location:** Place the zapper in an indoor area where rodent activity has been observed. Ideal locations include along walls, in corners, or in dark, secluded areas. Ensure the device is placed on a flat, stable surface. This device is for indoor use only.

HOW TO ⚡ USE ¹

1. OPEN → THE SLIDING COVER

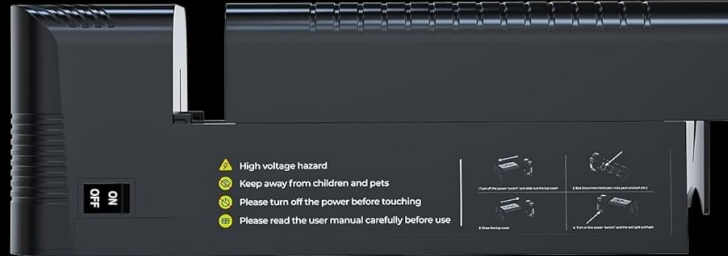

2. PLACE THE BAIT



sugar



cheese



nuts



cookie



meat

Image 5.1: Step-by-step guide showing how to open the sliding cover and place bait inside the ZAPPTRONIX Zapper. Recommended baits include sugar, cheese, nuts, cookies, and meat.

CHOOSE A LOCATION

3



Image 5.2: An overhead view of a house interior with lightning bolt icons indicating suitable indoor placement locations for the ZAPPTRONIX Zapper, emphasizing 'INDOOR USE ONLY'.

6. OPERATION

Once the zapper is set up and baited:

1. **Turn On the Device:** Flip the ON/OFF switch to the 'ON' position. The LED indicator will illuminate, signaling that the device is active and ready to operate.
2. **Rodent Elimination:** When a rodent enters the trap and makes contact with the metal plates, a high-voltage shock is delivered, resulting in quick and humane elimination.
3. **Notification of Catch:** Upon a successful catch, the device will emit an audible beep approximately every 30 seconds to alert you.
4. **Disposal:** When alerted to a catch, turn the device OFF before handling. Dispose of the rodent by sliding the top cover open and emptying the contents into a waste bin without direct contact.



Image 6.1: A visual guide illustrating the three main steps for using the ZAPPTRONIX Zapper: Charging the Device, Placing the Bait, and Turning ON the Zapper.

7. MAINTENANCE

Regular maintenance ensures optimal performance and longevity of your ZAPPTRONIX Zapper:

- **Cleaning:** After each catch, ensure the trap is OFF. Slide the top cover forward and remove it. Dispose of the rodent. Clean the interior of the zapper, especially the metal plates, with a dry cloth or paper towel to remove any debris or residue. Do not use water or liquid cleaners on the electrical components.
- **Recharging:** Monitor the LED indicator for low battery warnings. Recharge the device as needed to ensure it is always ready for operation.
- **Bait Replacement:** Replace bait regularly, especially if it becomes old, dry, or consumed without a catch.

8. TROUBLESHOOTING

Refer to the table below for common issues and their solutions:

Problem	Possible Cause	Solution
Device not turning on	Battery is low or depleted	Charge the device fully using the provided charging cable.
Device not turning on	ON/OFF switch is in 'OFF' position	Ensure the switch is flipped to the 'ON' position.
No catches	Incorrect bait or insufficient amount	Use fresh, appealing bait and place it at the back of the trap.
No catches	Improper placement	Relocate the zapper to areas with high rodent activity, such as along walls or in secluded spots.
Ants are consuming bait	Ant infestation near trap	Spray for ants in the vicinity of the trap before placement to prevent them from reaching the bait.

9. SPECIFICATIONS

- **Brand:** ZAPPTRONIX
- **Model:** mk08
- **Product Dimensions:** 10"L x 3"W x 4"H (25.4 cm L x 7.62 cm W x 10.16 cm H)
- **Item Weight:** 1.54 pounds (0.7 kg)
- **Power Source:** Electric, 1 Lithium Ion battery (included)
- **UPC:** 374315682290
- **Manufacturer:** Ningbo Getter Electronics Co .,Ltd.
- **Intended Use:** Indoor Rodent Control

10. WARRANTY AND SUPPORT

For warranty information, technical assistance, or any questions regarding your ZAPPTRONIX Electronic Rat and Mouse Zapper, please contact ZAPPTRONIX customer service through the retailer where the product was purchased or visit the official ZAPPTRONIX website for support contact details.